



USB REAL-TIME SPECTRUM ANALYZER

SAN-400 SERIES
40 GHz

Key facts

Frequency range: 9 kHz to 40 GHz

1 GHz DANL: -161 dBm/Hz

1 GHz phase noise: -107 dBc/Hz@10 kHz

Analysis bandwidth: up to 100 MHz

USB3.0/2.0 type C interface

Highly compatible API interface

Windows 11/10/8/7 (x86、x64) are supported

Debian 12/11/10 (x64、AArch64) are supported


Ubuntu 24.04/22.04/20.04/18.04 (x64、AArch64) are supported

Applications

Standard spectrum sweep




IQ streaming and analysis

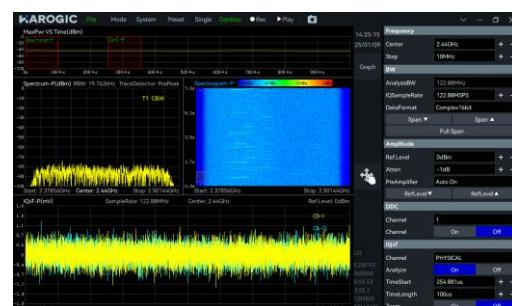

Power vs time measurement



Real-time analysis

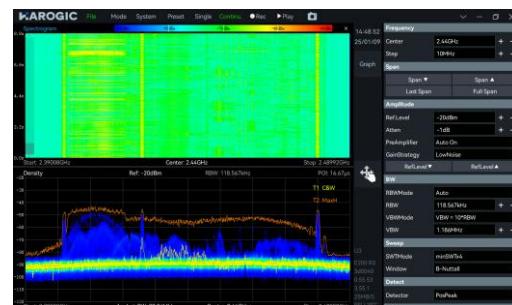

Specifications*

FREQUENCY

Frequency range	SAN-400 R2	-
	9 kHz-40 GHz	-
Reference clock	Internal or external	
Frequency accuracy	OCXO (std.)	<1 ppm, manual correction is available
	Ext. GNSS disciplined OCXO (opt23)	<0.05 ppm, when locked to GNSS
Aging and temperature stability	OCXO (std.)	<1 ppm/year, <0.15 ppm
	Ext. GNSS disciplined OCXO (opt23)	<1 ppm/year, <0.05 ppm

SPECTRUM PURITY

SSB phase noise (dBc/Hz)

	SAN-400 R2		-	-
Carrier frequency	1 GHz	40 GHz	-	-
1 kHz	-99.0	-78.4	-	-
10 kHz	-107.5	-85.7	-	-
100 kHz	-107.7	-85.1	-	-
1 MHz	-122.7	-100.8	-	-

Residual response (dBm)

spur reject = bypass

RBW = 1 kHz

PosPeak detector

	SAN-400 R2		-	-
Reference level (R.L.)	0 dBm	-50 dBm	-	-
9 kHz-10 GHz	-72	-103	-	-
10 GHz-20 GHz	-91	-115	-	-
20 GHz-40 GHz	-85	-105	-	-

Image rejection

SAN-400 R2

spur reject = standard

90 MHz-33 GHz	>90 dBc (typ.)	-
33 GHz-40 GHz	>58 dBc (typ.)	-

IF rejection	>90 dBc; 8.2 GHz~21.75 GHz,>68 dBc
Local oscillator related spurious	<-65 dBc Center frequency ± (N/M)*100 MHz, N,M = 1,2,3,4,5...

IIP3 / IIP2 (dBm)

SAN-400 R2				
Carrier frequency	1 GHz	40 GHz	-	-
R.L. = 20 dBm	40.3 / 75.5	31.7 / 88.6	-	-
R.L. = 0 dBm	27.4 / 45.3	10.3 / 86.1	-	-
R.L. = -20 dBm	8.7 / 25.2	4.8 / 66.6	-	-

AMPLITUDE

Max. input power (CW)	20 dBm	90 MHz-40 GHz and the preamplifier is off
	8 dBm	9 kHz-90 MHz or preamplifier is on
Max. DC voltage	±10 VDC	
Display range	DANL-20 dBm (typ.)	
Amplitude accuracy	9 kHz-9.5 GHz	±2.0 dB
	9.5 GHz-40 GHz	±3.0 dB
IF in-band flatness	±2.0 dB	
Reference level (R.L.)	-50 dBm-20 dBm (typ.)	
RF preamplifiers	automatically turn on or forcibly turn off	
VSWR	90 MHz-16 GHz	<2.0:1
	16 GHz-40 GHz	<3.0:1

Display average noise level

(DANL) (dBm/Hz)

RBW=10 kHz

SAN-400 R2				
Reference level	-20 dBm	-50 dBm	-	-
9 kHz	-134	-145	-	-
100 kHz - 88 MHz	-151	-157	-	-
88 MHz - 9.0 GHz	-148	-154	-	-
9.0 GHz - 19 GHz	-153	-158	-	-
19 GHz - 40 GHz	-146	-147	-	-

STANDARD SPECTRUM ANALYSIS

Detector	PosPeak, NegPeak, Sample, Average, RMS, MaxPower
RBW	0.1 Hz-10 MHz
VBW	0.1 Hz-10 MHz
Data chart	SAStudio4 software provides spectrum, waterfall chart, and historical trace
Measurements	Channel power, OBW, X dB bandwidth, Adjacent channel power ratio, IM3
Sweep speed	SAN-400 R2
RBW \geq 1 MHz FPGA spur reject = standard	about 590 GHz/s
RBW = 250 kHz FPGA spur reject = standard	about 571 GHz/s
RBW = 30 kHz FPGA spur reject = standard	about 21 GHz/s
RBW = 1 kHz CPU spur reject = standard	about 2.3 GHz/s

IQ RECORDING

Burst recording bandwidth	Maximum: 100 MHz The built-in memory depth is 128 Mbytes
Continuous recording bandwidth	Maximum: 50 MHz Limited by the bandwidth of USB interface and hard disk. The storage depth is limited by the hard disk capacity
IQ sample rate	125MSPS, decimate factor: 1,2,4,8,32,64,128,256,512,1024,2048,4096 supported (FPGA)
External trigger response	Maximum response frequency 500 times/sec

DETECTION ANALYSIS/ZERO SPAN

Lowest time resolution	8 ns
Max. analysis bandwidth	100 MHz
Detector	PosPeak, NegPeak, Sample, Average, RMS, MaxPower

REAL TIME SPECTRUM ANALYSIS

FFT analysis

FFT engine is implemented in FPGA. Frame compression and trace detection are supported. No missing samples between FFT frames

$$\text{FFT frame update rate} = 10^9 \text{ ns}/(N * D * 8 \text{ ns}); \text{POI} = N * D * 8 \text{ ns}$$

N for FFT points (2048, 1024, 512, 256, 128, 64, 32)
D for decimate factor (1, 2, 4, 8...)

Typical settings	FFT refresh rate	POI
N = 2048, D = 1	61,035 times/sec	16.384 us
N = 32, D = 1	3,906,250 times/sec	0.256 us
Max. analysis bandwidth		100 MHz
Window function		B-Nuttall, Flat-top, LowSideLobe
RBW		14.73 MHz-3.59 kHz (Flat-top) 7.81 MHz-1.90 kHz (B-Nuttall) 13 grades for each window type
Amplitude resolution		0.75 dB

GENERAL

Input and output

Power supply	Type-C, dedicated power supply port. Acceptable voltage range: 4.75 to 5.25 V (ripple < 0.2 Vpp). Device will fetch up to 2 A current from this port
Data interface	Type-C, USB3.0 and USB2.0 (limited bandwidth) Device will fetch up to 1 A current from this port
RF input	2.92 mm (F), Input impedance 50 Ω
Reference input	MMCX (F), amplitude ≥ 1.5 Vpp, input impedance is 300 Ω
Reference output	Integrated in MUXIO, 3.3 V CMOS, programmable on/off
External trigger input	Integrated in MUXIO, 3.3 V CMOS, input: high impedance
External trigger output	Integrated in MUXIO, 3.3 V CMOS
Analog IF output	MMCX (F), maximum output power – 25 dBm, output impedance 50 Ω Supporting, 307.2 MHz±50 MHz

Power consumption	10-14 W
-------------------	---------

Enclosure	Core with no enclosure and fan is provided
-----------	--

SAN-400 R2		
Size (D * W * H) and weight	139 x68 x31 mm and about 420 g	-
GNSS synchronization	External GNSS (opt21)	+/- 100 ns
	External GNSS (opt22)	+/- 75 ns
	External GNSS (opt23)	+/- 50 ns
System requirements	Windows 11/10/8/7 Debian 12/11/10 Ubuntu 24.04/22.04/20.04/18.04	x86、x64 x64、AArch64 x64、AArch64
Operating temperature (ambient/core)	T0 class (std.) T1 class (opt40) T2 class (opt41)	0-50 °C/0-70 °C -20-65 °C/-20-85 °C -40-85 °C (core)
Storage temperature (ambient)	T0 class (std.) T1 class (opt40) T2 class (opt41)	-20-70 °C -40-85 °C -40-85 °C (core)
Packaging and accessories	Flash disk * 1, USB 3.0 cable * 2, Power adapter * 1	

*Specification applies under the following conditions:

- (1) Start up and warm up for 10 minutes
- (2) Ambient temperature 25 °C (core temperature 50 °C)
- (3) Stand spectrum analysis mode-spurious rejection enhance on.
- (4) Necessary heat dissipation is provided to ensure the ambient and core temperature within the rated range at the same time

OPTIONS

Code

Code	Description	Type
20	MUXIO IO board	accessory
21	External GNSS	accessory
22	External high precision GNSS	accessory
23	External GNSS disciplined OCXO reference clock	accessory
34	External omnidirectional antenna, 400-8000MHz, Gain<2dBi	accessory
40	T1 temperature class	built-in hardware
41	T2 temperature class, only available for core	built-in hardware
71	Basic digital modulation analysis	software
72	Pulse signal measurement	software

 www.harogic.com
 info@harogic.com