

# NEWARE

— Since 1998 —

## Turnkey Solution for Battery Testing



CT-4000(mA) CT-8000(mA)	CT/CE-4000(3C) CT/CE-8000(3C)	CT-4000 CT-8000 (Customized Products)	CE-6000(Cell)	CE-6000(Module)	CE-6000(Pack)	CT-5000(mA) CT-5000(3C)	CE-5000(3C)	CE-5000(Cell)	CT-9000
----------------------------	----------------------------------	---	---------------	-----------------	---------------	----------------------------	-------------	---------------	---------



Coin Cell All-in-One Testing System	Dual-Temperature Zones All-in-One Testing System	4 Temperature Zones All-in-One Testing System	Mini All-in-One Testing System	3C All-in-One Testing System	Power Cell All-in-One Testing System	Automated Production Line
---	--	---	--------------------------------------	------------------------------------	--	---------------------------

Agile Development | Flexible Production | Global Services



1998

Established in

1,000+

Employees

60,000+


Clients

1,000+

Patents & Software Copyrights

Dedicated to providing support for Global Battery Manufacturers and related Material Production Companies, Quality Inspection Departments, Universities, and Research Institutions



- Providing high-performance Battery Testing Systems, Formation and Grading Systems, Environmental Test Chambers, and Automation Equipment
- Providing system services NEWARE Store + NEWARE LabTech AI (LIMS)
- Providing global service network, achieving timely response

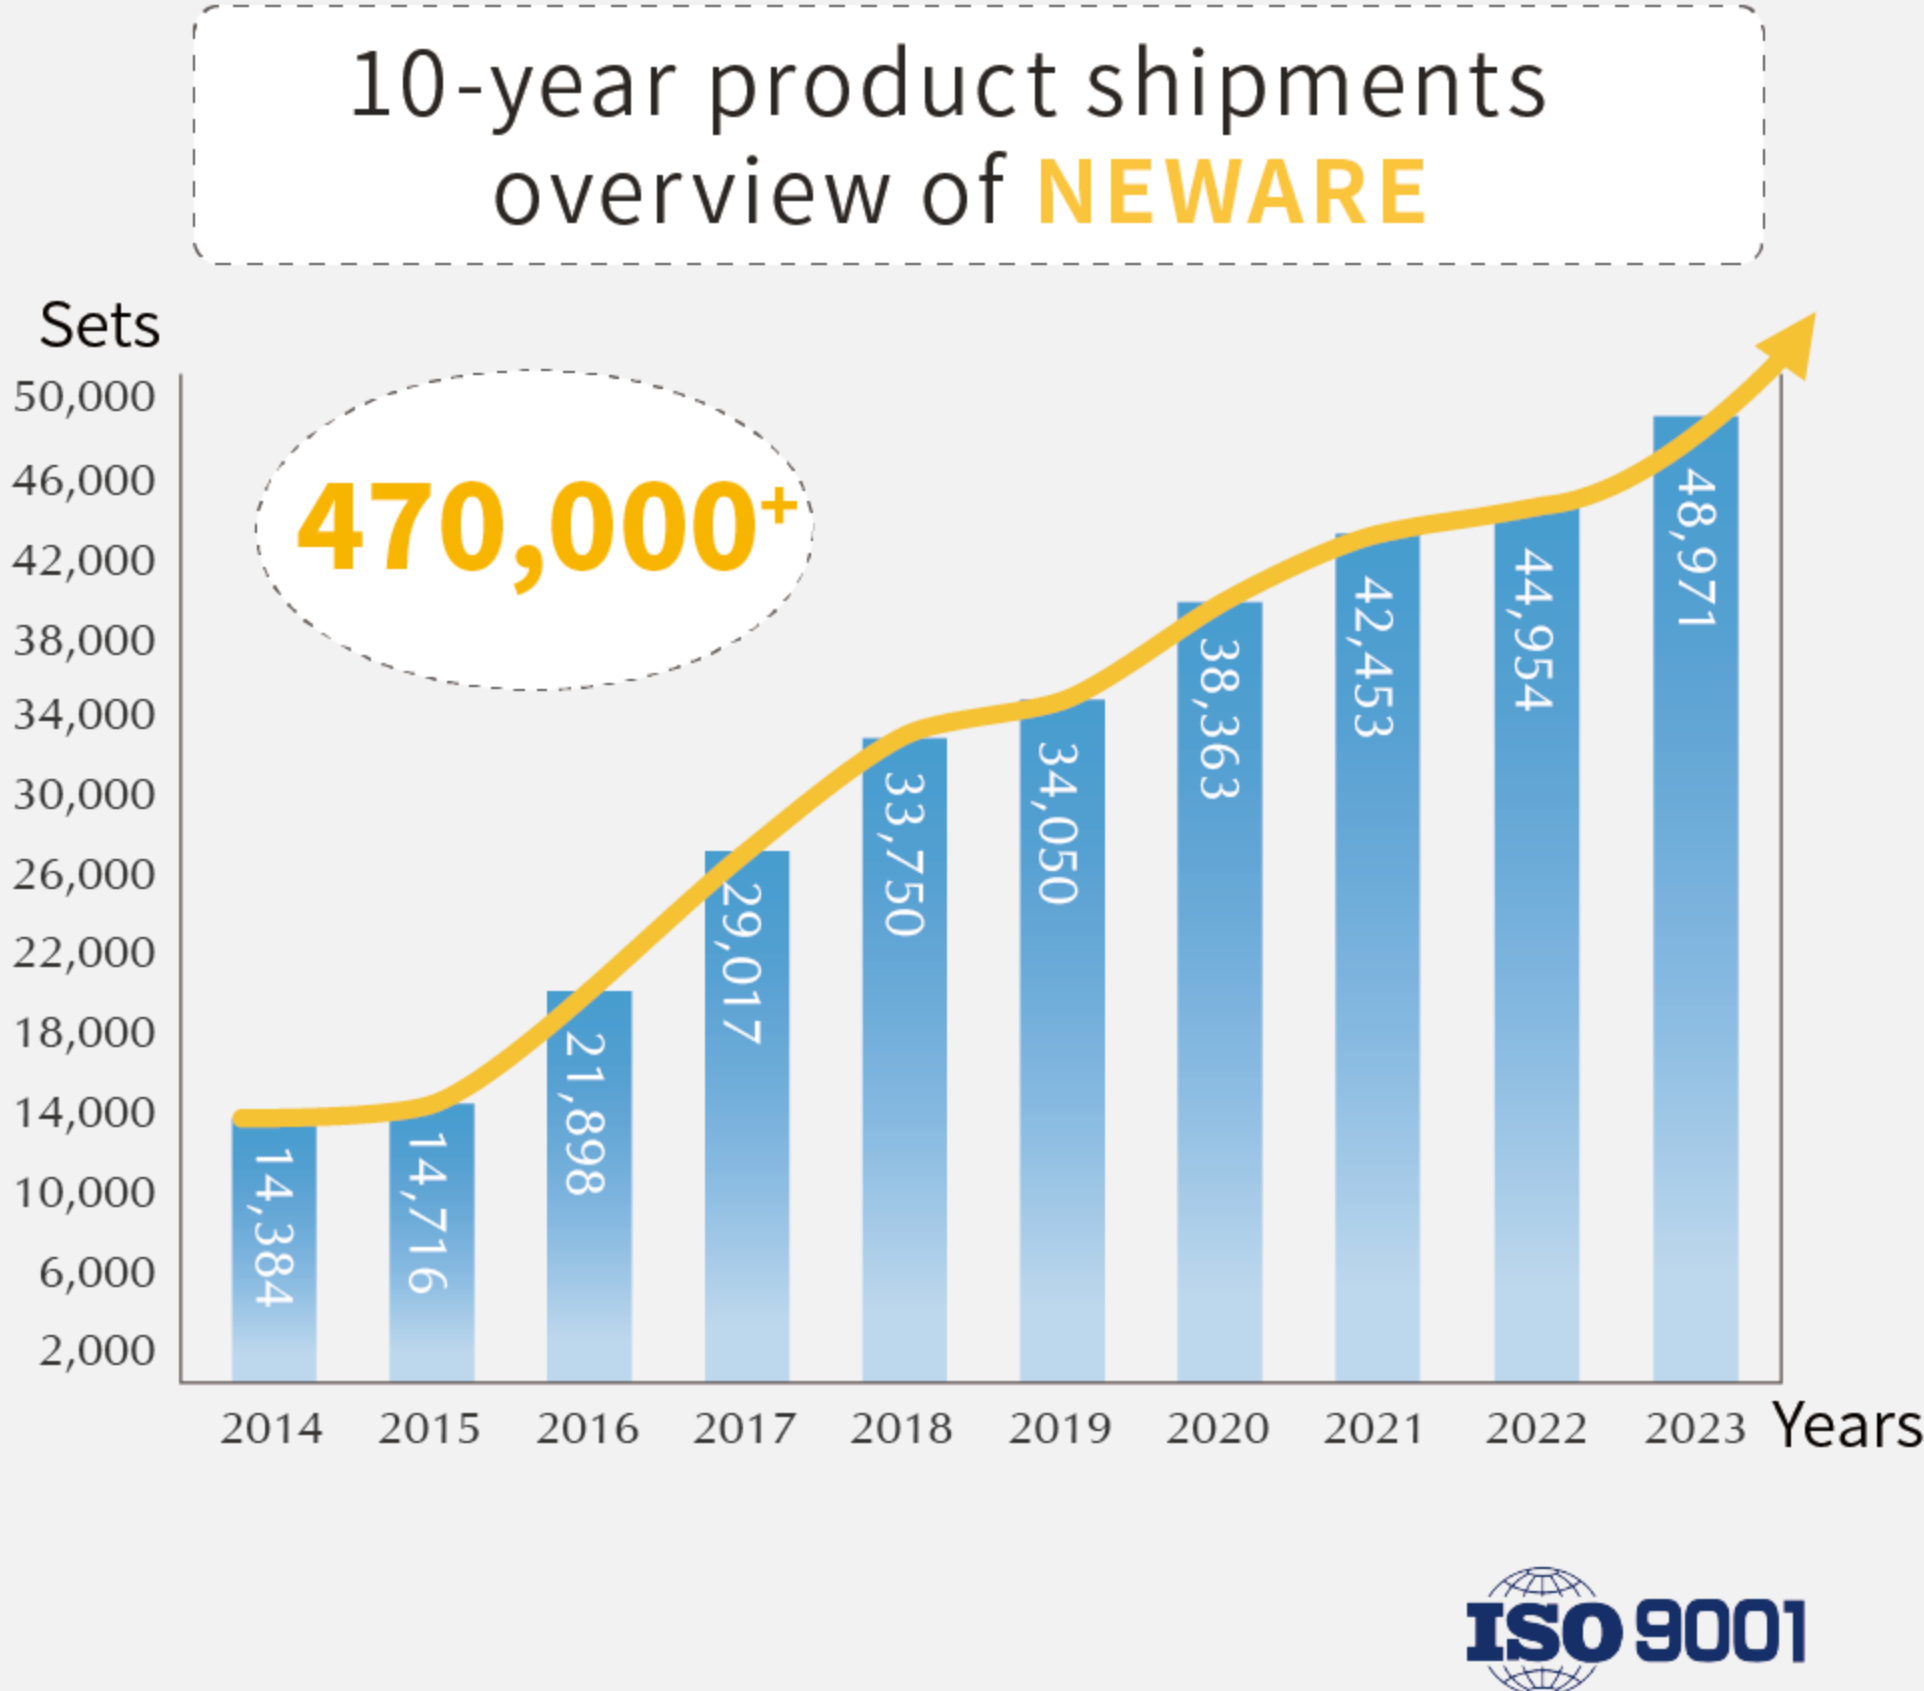

LabTech App

Smart-Lab Solutions Platform

Remote Intelligent Control | Technical Support  
Asset Management | Academic Live Streaming  
Selected Top Journals | Research Community

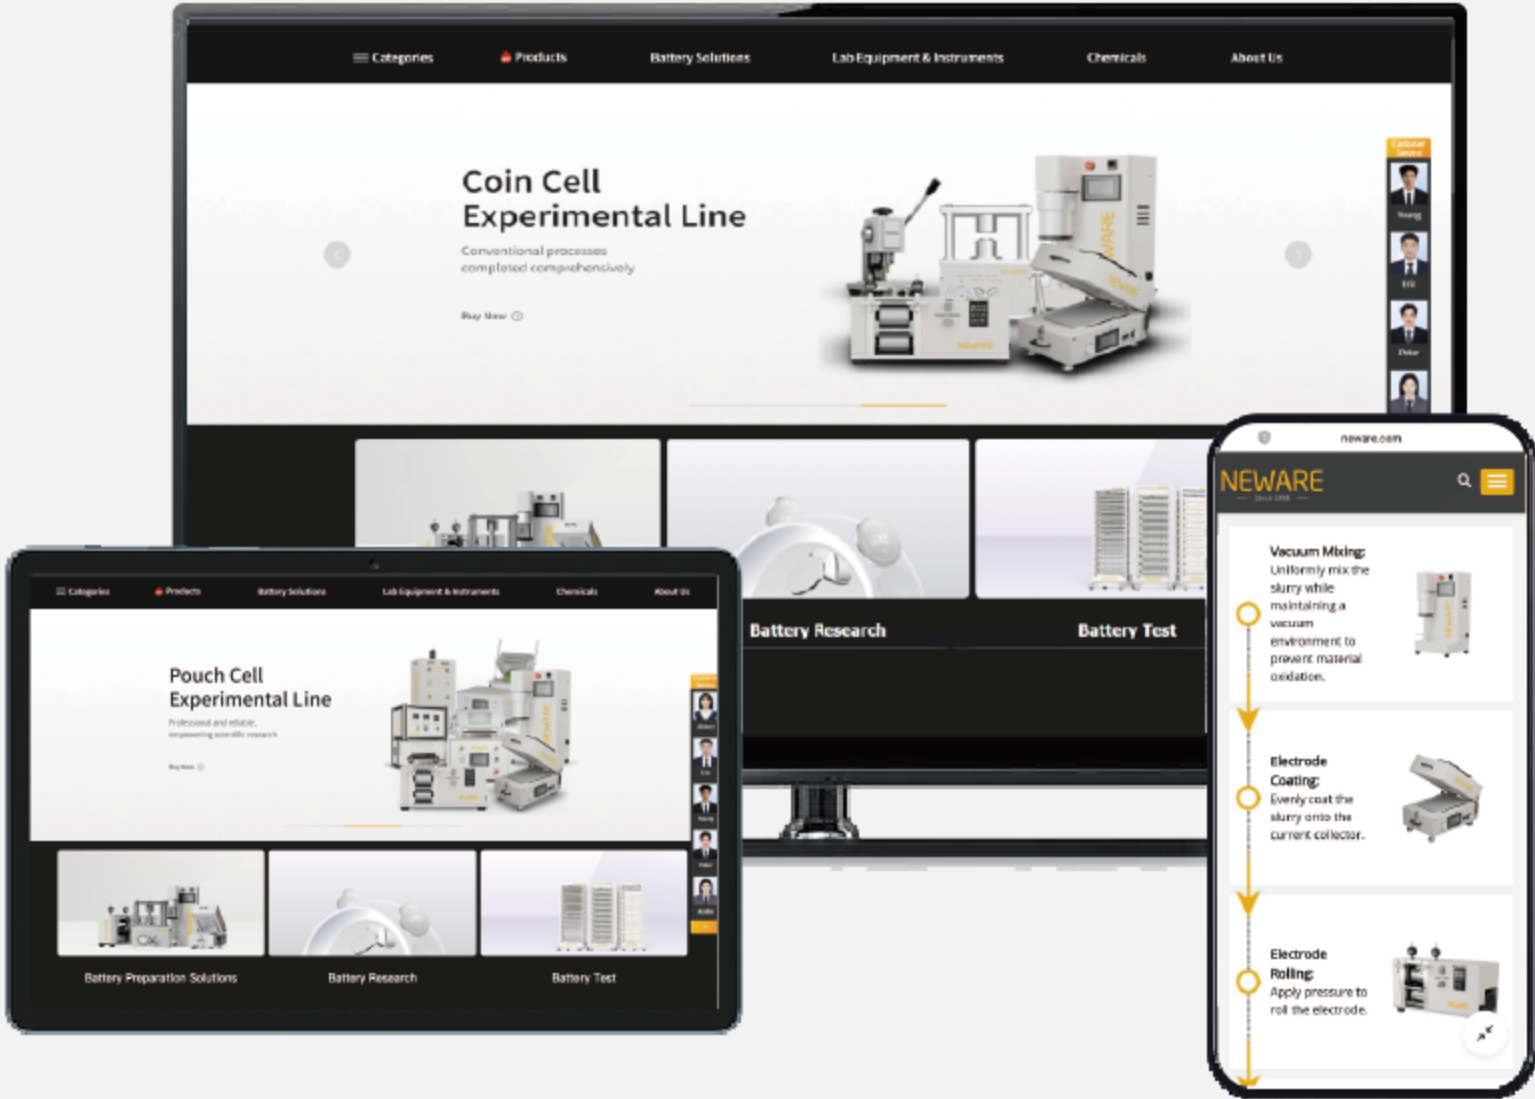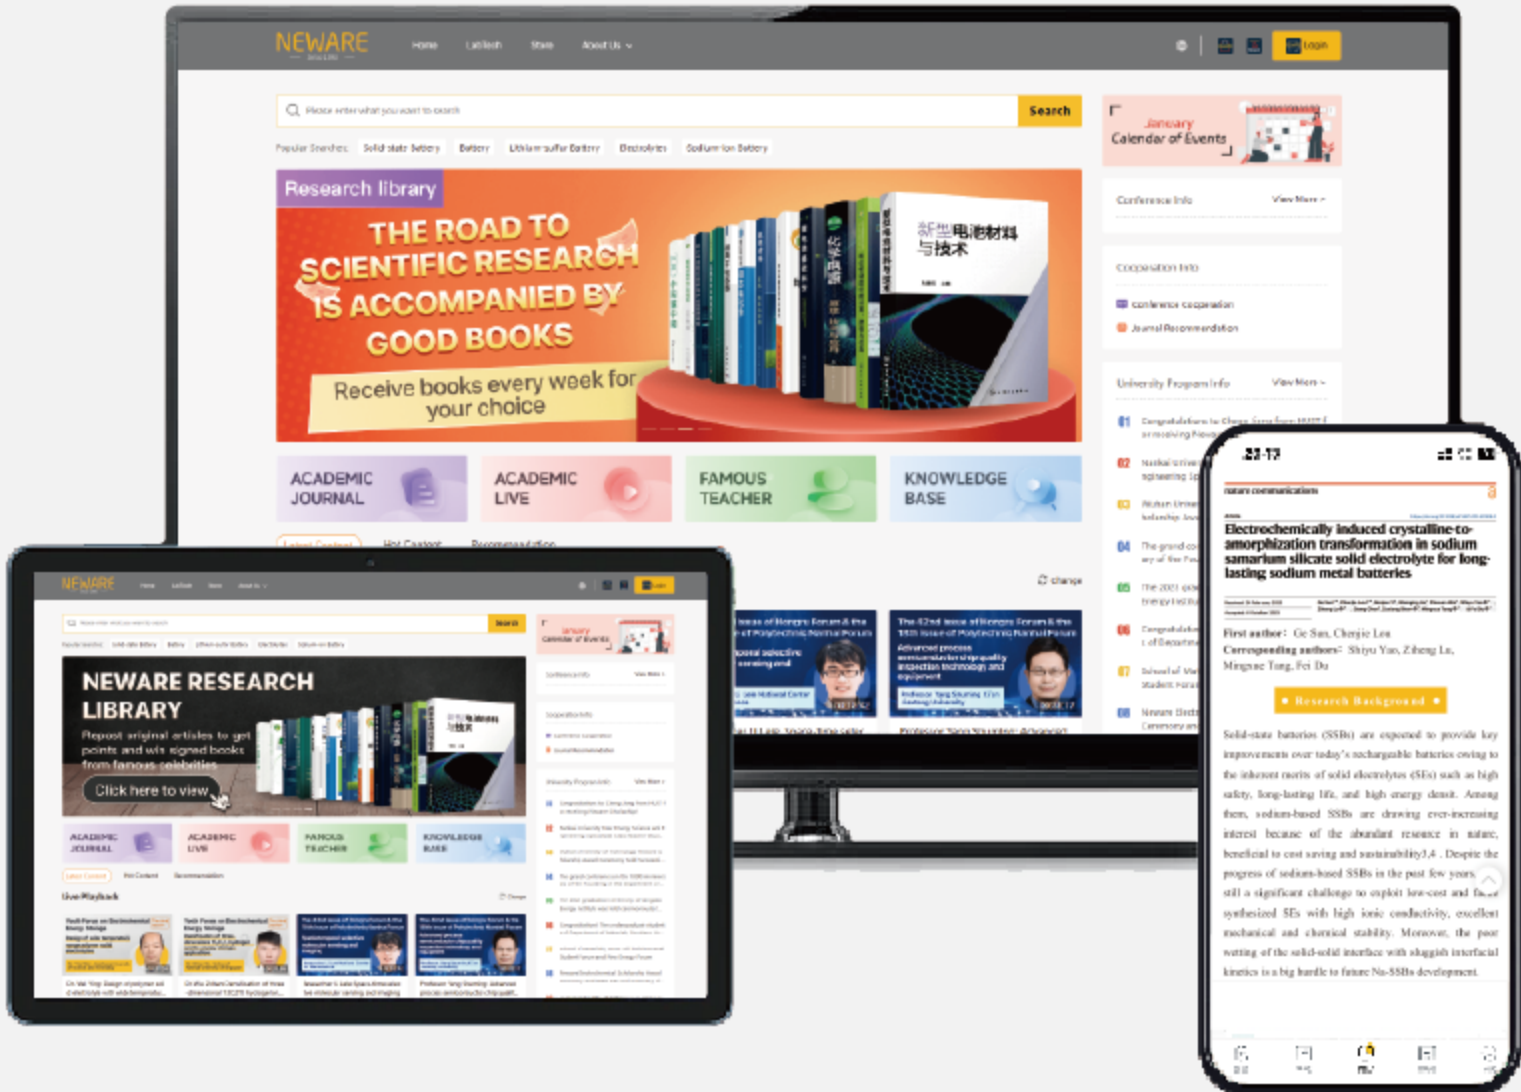

Store App

One-Stop Purchasing Platform


Complete Product Categories | One-Click Procurement  
Video Explanation | Tool Guide  
Academic Paper Award | Information Sharing



Test App

Guaranteeing You Accuracy Test Data

Battery Testing Services | Calibration Services

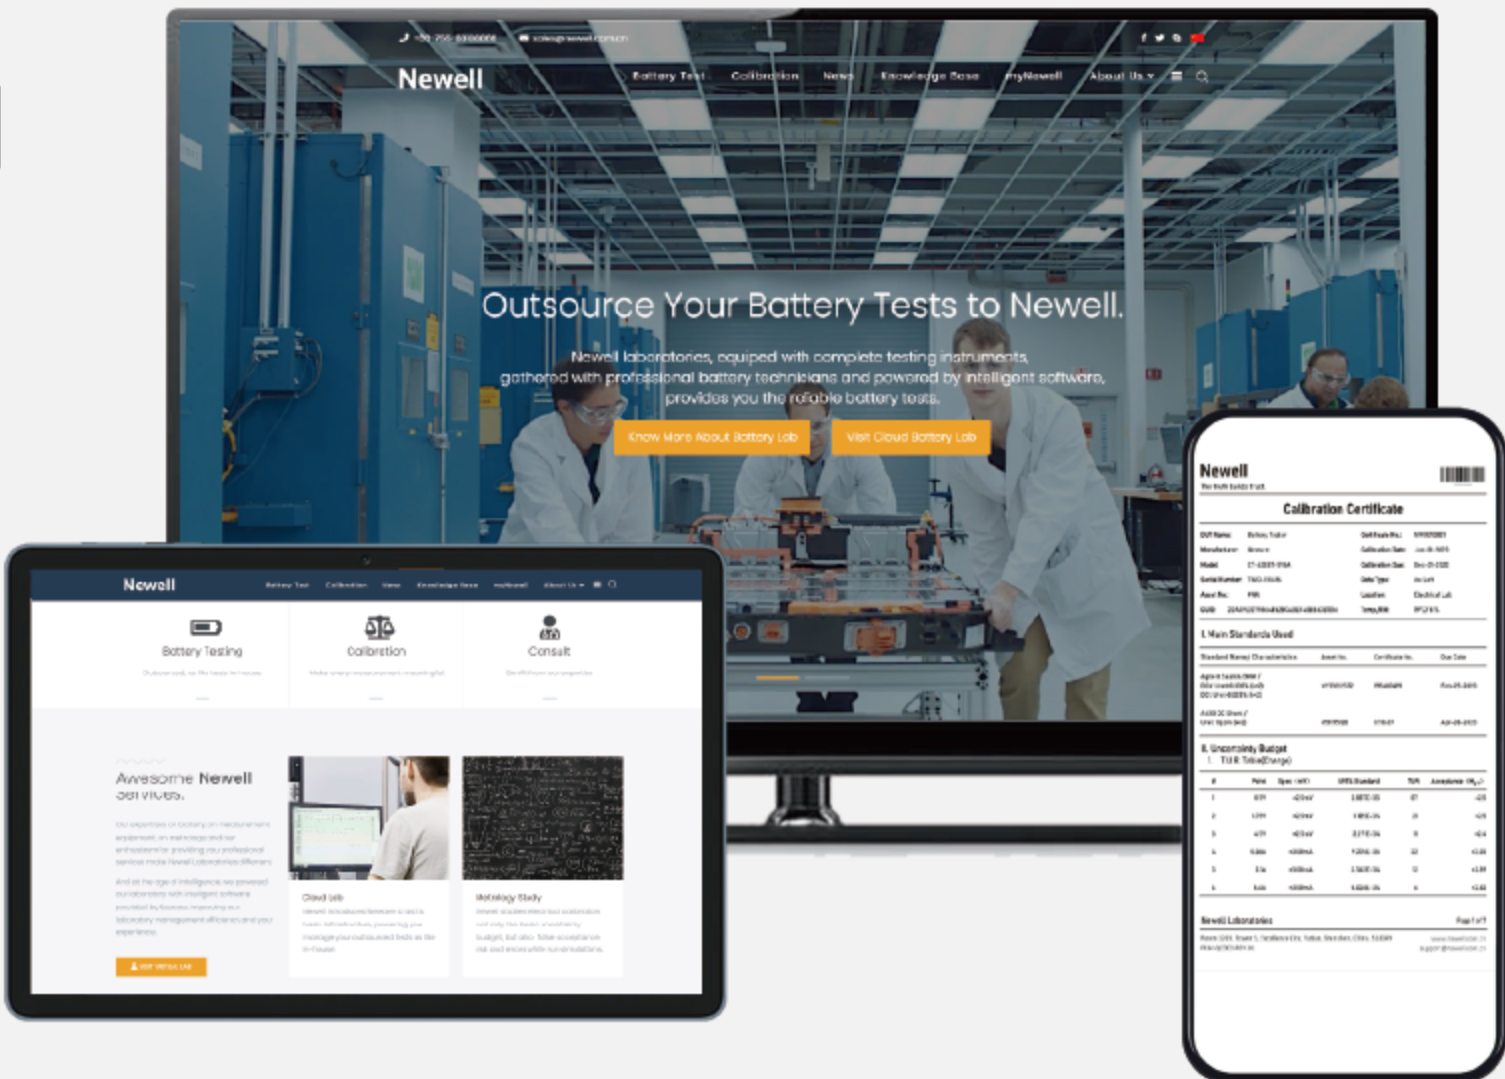



# 4|8 Series

## Precision empowers confidence.

The 4/8 Series battery testing system is specifically designed for battery material research and 3C battery testing and development. In addition to standard charging / discharging test functions, it also integrates various testing functions such as EIS, DCIR, CV, and pulse simulation, meeting comprehensive testing needs.




CT/CE-4000 Series  
Scan to learn more details




CT/CE-8000 Series  
Scan to learn more details




CT-8002Q-5V100mA-124  
● Size: 127×225×48mm

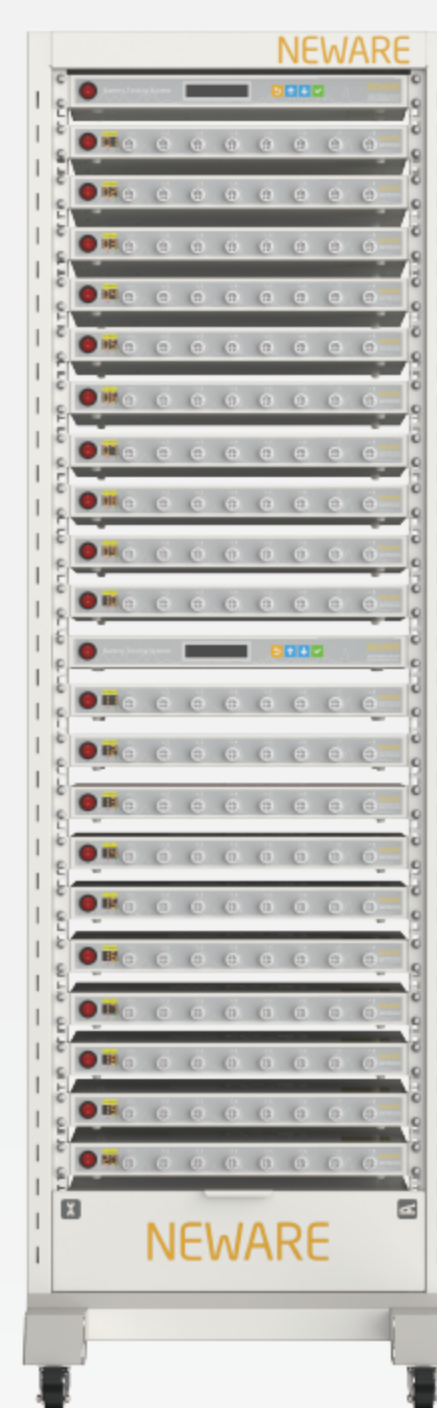

CT-4008Q-5V100mA-124  
● Single: 19"1U  
(483×310×48mm)  
● Overall: 555×650×1832mm

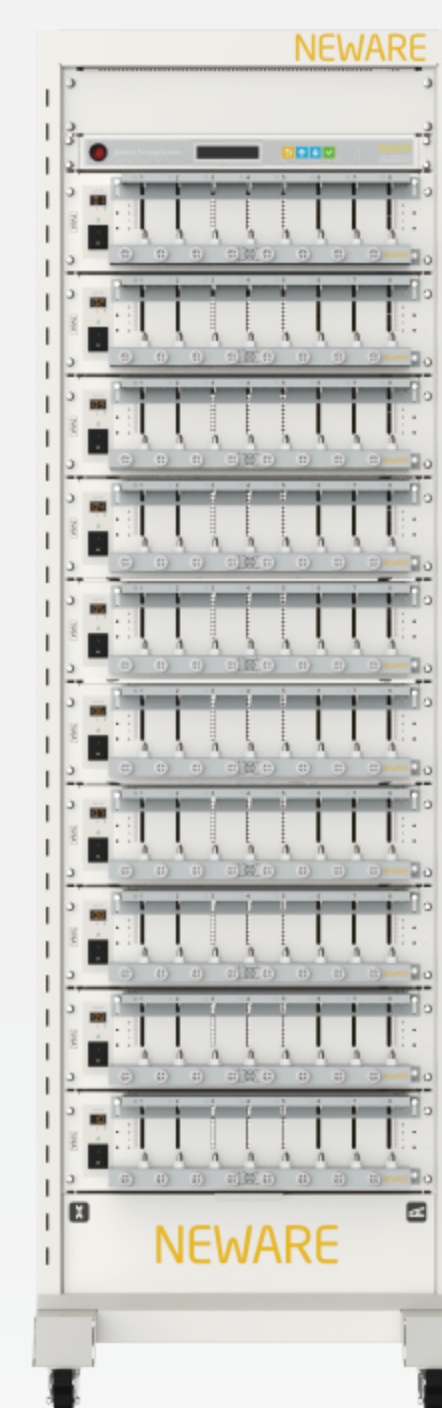

CT-4008Q-5V6A-S1  
● Single: 19"3U  
(483×404×130mm)  
● Overall: 555×650×1832mm

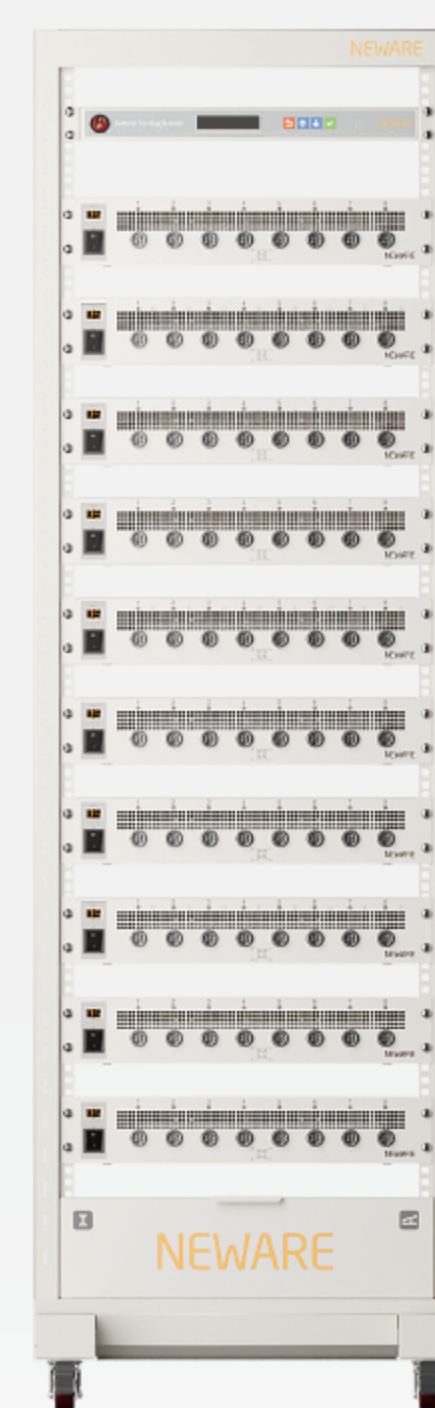

CE-4008Q-5V20A-SR  
● Single: 19"2U  
(483×337×88.5mm)  
● Overall: 555×650×1832mm

### Battery Testing System

CT-4000 & CT-8000 mA Battery Testing System  
CT/CE-4000 & CT/CE-8000 3C Battery Testing System

### Voltage

5V  
5V

### Current

10mA/20mA/50mA/100mA  
6A/12A/15A/20A/30A

## Multi-range, more precise.

The 4/8 series battery testing system has a current range of 3 scales / 4 scales.

### 5V100mA

- 0.2μA ~ 0.1mA
- 0.1mA ~ 1mA
- 1mA ~ 10mA
- 10mA ~ 100mA




CT-4008Q-5V100mA-124

## Multiple current options, meeting diverse needs.

5V10mA/20mA/50mA/100mA  
Designed for coin cell testing.

5V6A/12A/15A/20A/30A  
Designed for 3C battery testing.

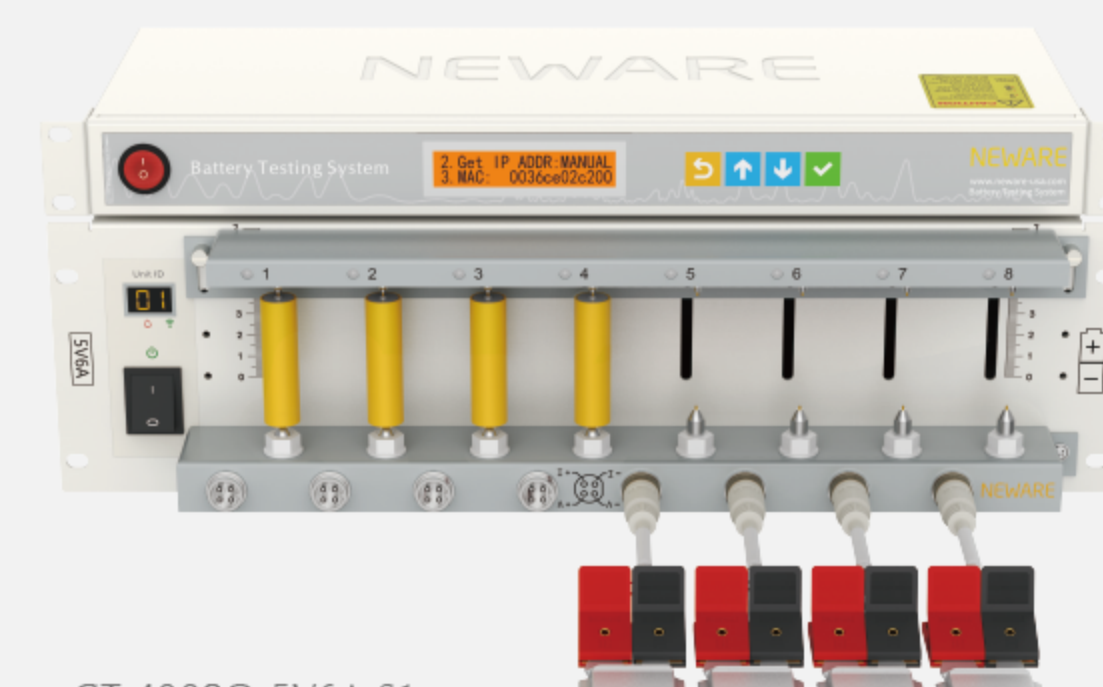

CT-4008Q-5V6A-S1

## Comprehensive testing.



Cycle Life Test



Rate Charging /  
Discharging Test

GITT

GITT Test

DCIR

DCIR Test



dQ/dV  
Differential  
Capacity Curve



Pulse Test

## Battery temperature test.

Linked with environmental test chambers, it achieves battery temperature performance testing and conducts comprehensive performance evaluation.




Constant  
Temperature Test



Thermal  
Condition Test



WHW-200L

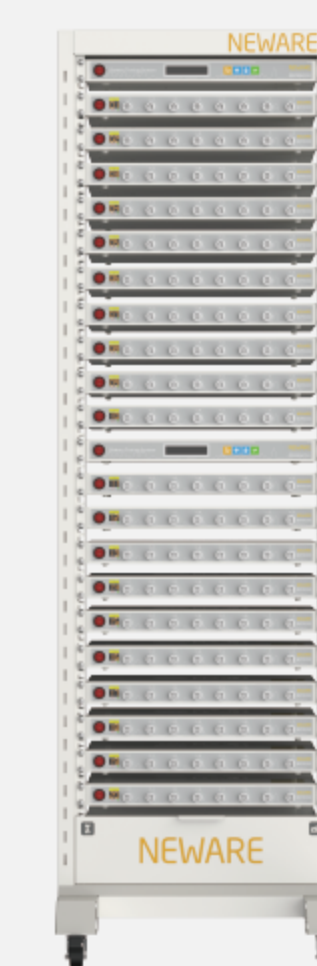

CT-4008Q-5V100mA-124

## Enhanced features, revolutionary experience.

Portable battery testing device with a Type-C power supply interface, featuring EIS, CV, and other testing functions.



CV Test




EIS Test



CT-8002Q-5V100mA-124

## Four-wire connection.

Four-wire test leads reduce the impact of lead resistance and improve measurement accuracy.

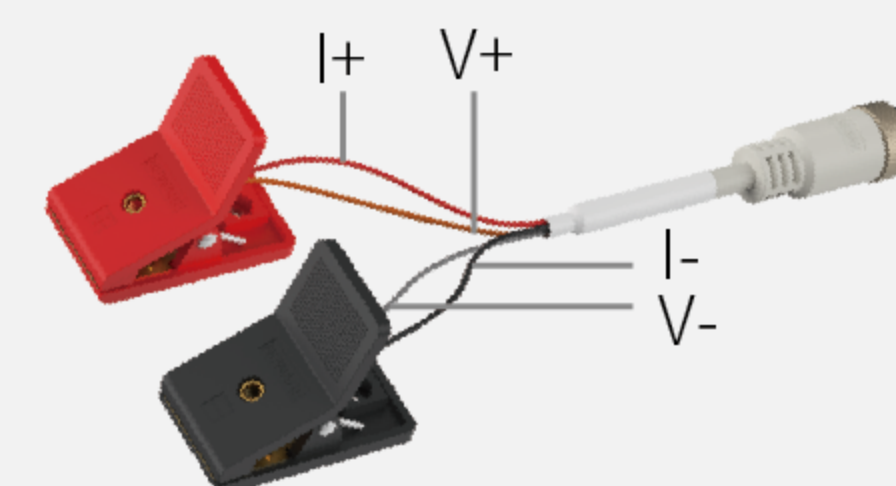

\*CT/CE: Battery charging-discharging test system. "E" indicates that this equipment is equipped with energy feedback function.

\*Other models can be customized according to voltage and current requirements.

\*Actual dimensions may differ from those marked in the picture. Please refer to the actual product for the correct size.



# 6 Series

## Swift in action, frugal in power.

The 6 Series battery testing system is designed for testing applications in EVs, communication base stations, energy storage systems, and more. It features a variety of testing functions including simulated conditions and DCIR testing, which are crucial for in-depth research and evaluation of the electrical performance of battery packs.



CE-6000 Series  
Scan to learn more details



CE-6012n-20V50A-HF

- Size: 600×800×1800mm
- Weight: Approx.290kg

CE-6001n-100kW-500V300A-IG

- Size: 1250×1050×1800mm
- Weight: Approx.1200kg

CE-6016A-5V75A

- Size: 800×800×1740mm

Testing System	Voltage	Current
CE-6000 Cell Testing System	5V/6V	50A~2000A
CE-6000 Module Testing System	20V~200V	20A~1200A
CE-6000 Pack Testing System	200V~1200V	100A~1200A

### Modular power unit.

High-frequency isolated AC/DC and DC/DC modular design for flexible combination based on varying current ranges, channels, and power levels.



Voltage & Current Accuracy  
±0.02%/0.05%F.S.



Recording Frequency  
100Hz



Current Response Time  
(10%F.S.~90%F.S.)  
≤3/10ms




Current Conversion Time  
(-90%F.S.~90%F.S.)  
≤6/10ms

### Energy recycling, efficient and eco-friendly.

Battery discharge energy recovery, supplying other test channels or returning to the internal network.




Energy Feedback Efficiency (Max)  
75%/90%/94%

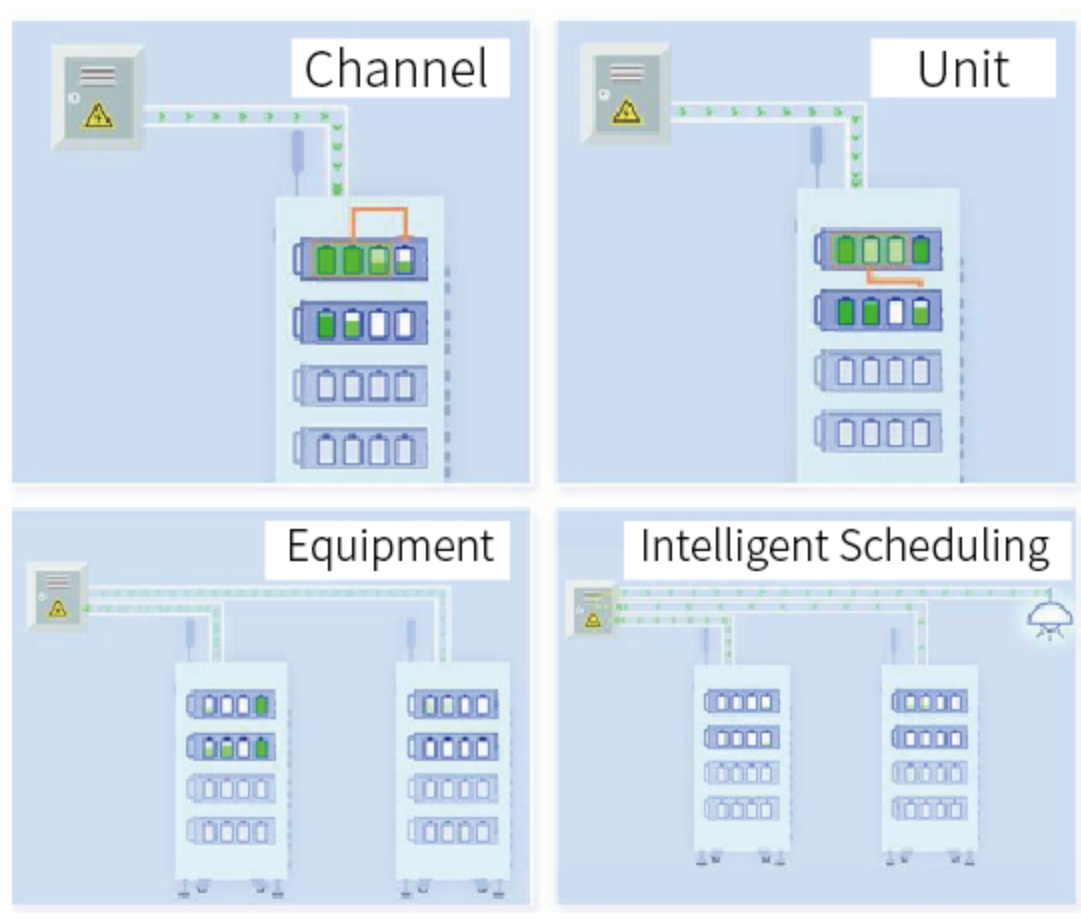

### Energy management.

Equipped with flexible paralleling capabilities and high current, it takes up minimal space and significantly enhances laboratory energy efficiency.

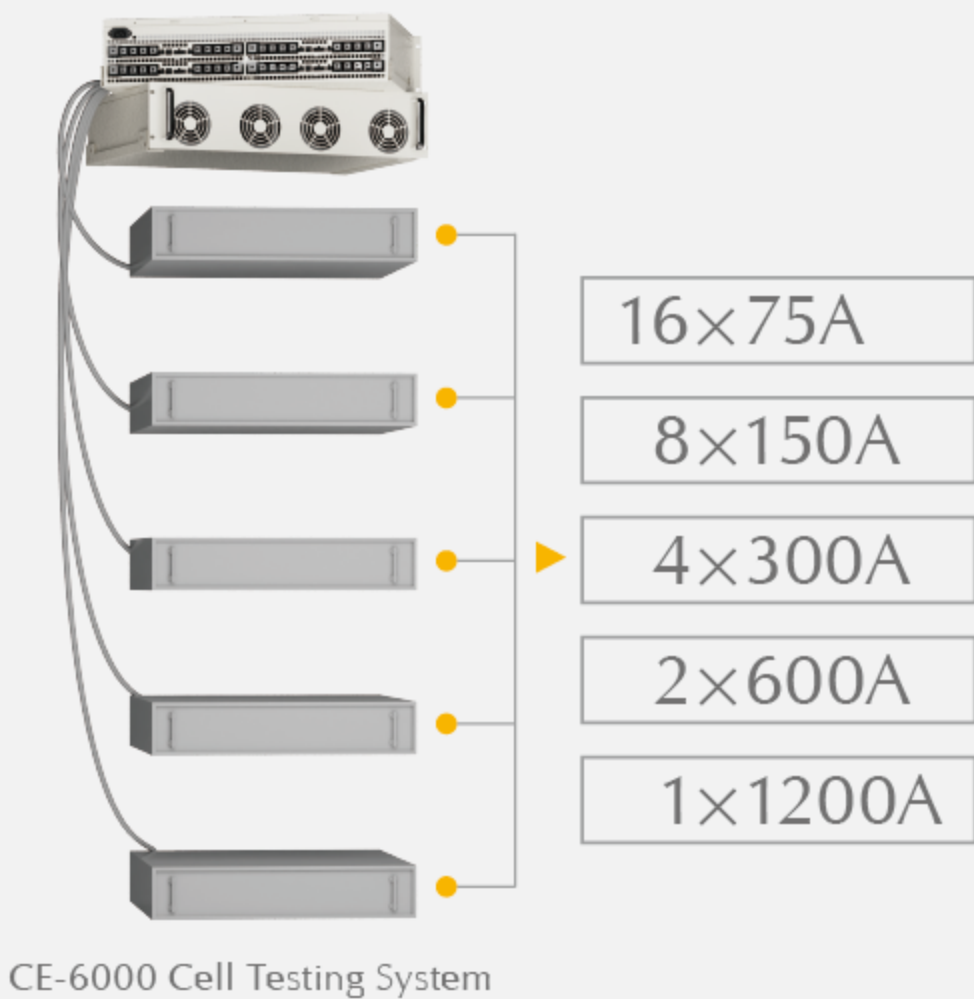

CE-6000 Cell Testing System

### Multiple communication protocols.

Supports CAN and RS485 communication with BMS, and features DBC configuration.



Simulation Test

Pulse Test

DCIR Test

Channel Paralleling

\*CT/CE: Battery charging-discharging test system. "E" indicates that this equipment is equipped with energy feedback function.  
\*Other models can be customized according to voltage and current requirements.  
\*Actual dimensions may differ from those marked in the picture. Please refer to the actual product for the correct size.



# 5/9 Series

## Capture the fleeting, discern the minute.

The 5/9 Series battery testing system is designed for high-precision battery testing, focusing on battery material research and power cell testing. The entire series supports the SMBus communication protocol, specifically designed for smart battery testing to enhance the accuracy of test data and the convenience of the testing process.



CT/CE-5000 Series  
Scan to learn more details



CT/CE-9000 Series  
Scan to learn more details



CT-9002-5V6A-F-204n  
● Size: 260×396×103mm




- |  |  |  |   |
|--|--|--|---|
| <b>CT-5008-5V6A</b><br>● Single: 19"3U(483×660×130mm)<br>● Overall: 555×735×1834mm | <b>CE-5008-20V10A-SMB</b><br>● Single: 19"3U(483×660×130mm)<br>● Overall: 555×735×1834mm | <b>CE-5002-5V600A</b><br>● Single: 19"4U(483×533×178mm)<br>● Overall: 555×735×1834mm | <b>CT-9008-5V15A</b><br>● Single: 19"3U(480×660×130mm)<br>● Overall: 606×800×2100mm |
|--|--|--|---|

Testing System	Voltage	Current
CT/CE-5000 mA/3C Battery Testing System	5V~30V	100mA~30A
CE-5000 Power Cell Battery Testing System	5V	75A~10kA
CT/CE-9000 Ultra-Precision Battery Testing System	5V	15A/30A


## SMBus communication.

Designed specifically for smart battery testing, enabling efficient communication with the battery.

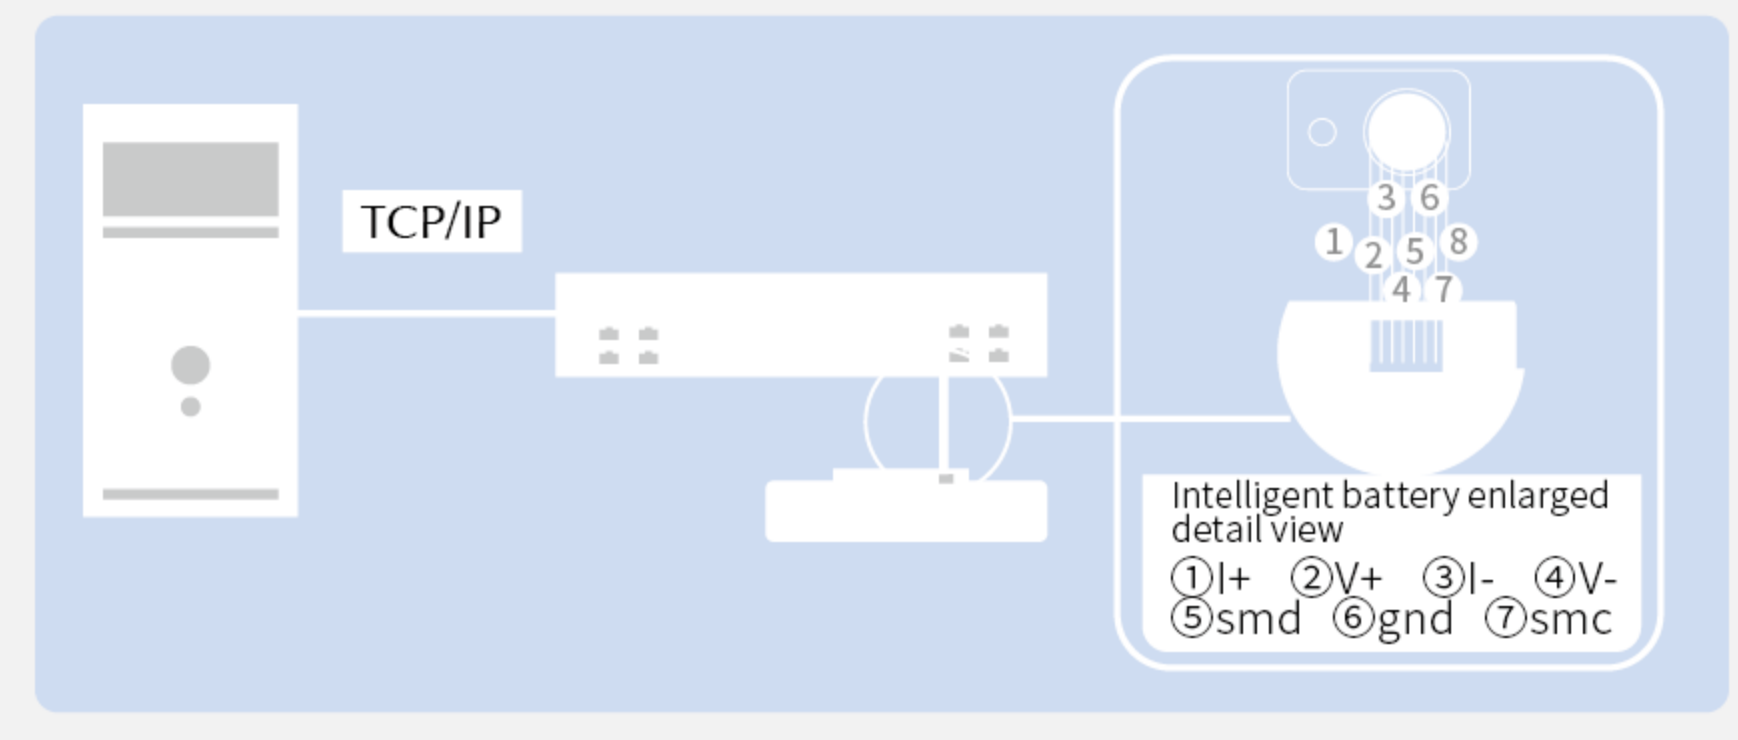

## Ultra-fast response.

Supports cross-unit paralleling, with a recording interval of 10ms in condition simulation testing, and internal clock synchronization error between channels is <1μs.

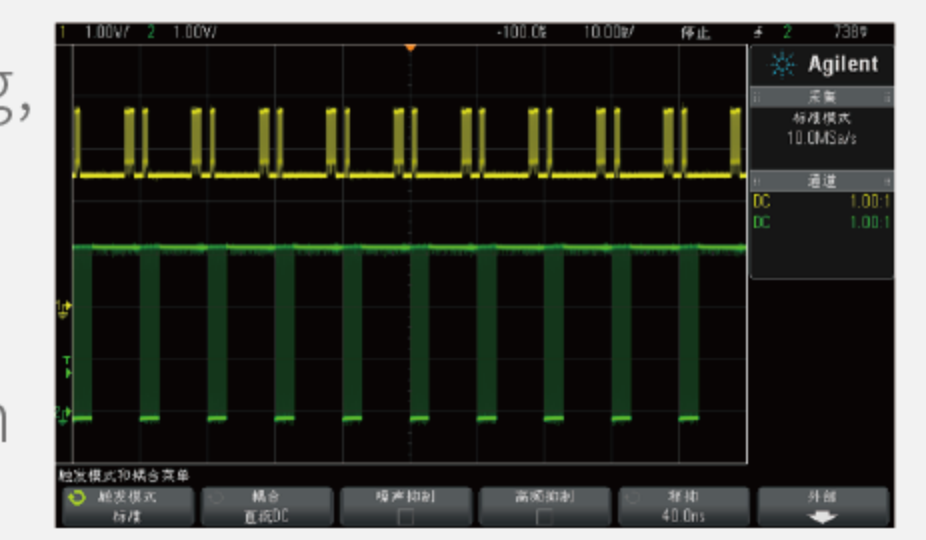


## CT-9000 Ultra-Precision Battery Testing System.

Meets high-precision testing needs for material research and provides accurate test results.

 <b>Voltage &amp; Current Accuracy</b> ±0.02%F.S.	 <b>Recording Frequency</b> 1000Hz	 <b>Current Response Time</b> ≤100μs	 <b>Minimum Pulse Width</b> 400μA
 GSM	 CV Test	 CT-9002-5V6A-F-204n	

## CT/CE-5000

- |   |   |
|---|---|
| <br><b>Voltage Accuracy</b><br>±0.02%F.S. | <br><b>Current Accuracy</b><br>±0.02%/0.05%F.S.                       |
| <br><b>Recording Frequency</b><br>100Hz   | <br><b>Current Response Time</b><br>(10%F.S.~90%F.S.)<br>≤1/2/20/30ms |

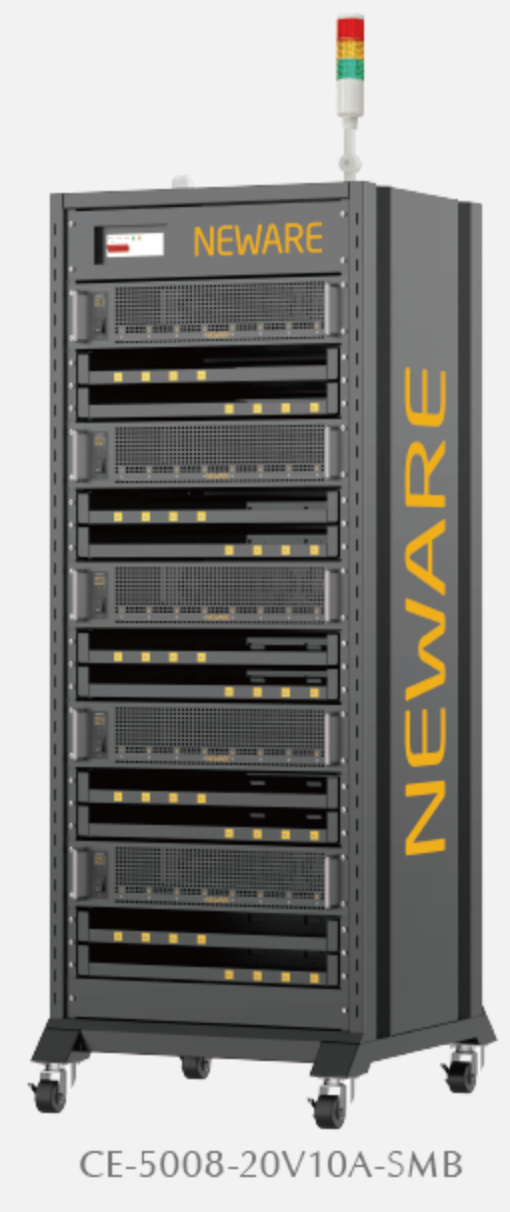

CE-5008-20V10A-SMB

## Multi-range, more precise. (5V6A)

- |                 |               |
|-----------------|---------------|
| ● 0.1μA ~ 180μA | ● 6mA ~ 180mA |
| ● 180μA ~ 6mA   | ● 180mA ~ 6A  |

## DCIR

DCIR Test  
  
dQ/dV  
Differential Capacity Curve

## Energy recycling, efficient and eco-friendly.

Battery discharge energy recovery, supplying other test channels or returning to the internal network.



Energy Feedback Efficiency



\*CT/CE: Battery charging-discharging test system. "E" indicates that this equipment is equipped with energy feedback function.  
 \*Other models can be customized according to voltage and current requirements.  
 \*Actual dimensions may differ from those marked in the picture. Please refer to the actual product for the correct size.



# WHW/WGDW

## Environmental Test Chamber Series

### Silent insulation, loud on performance.

Environmental test chambers offer a stable environment for constant, high, and low-temperature testing of battery temperature performance. They reveal the performance characteristics of battery materials at various temperatures, assess battery performance under extreme heat or cold, and ensure safety during temperature shock tests.



Environmental Test Chamber  
Scan to learn more details



WHW-200L-160CH-B

● Size: 600x920x1800mm  
● Weight: Approx.200kg

WHW-100L-2-160CH

● Size: 600x920x1920mm  
● Weight: Approx.260kg

WGDW-380L-2-40BFC-5V600A8CH

● Size: 1600x1800x2050mm  
● Weight: Approx.900kg

Testing System	Nominal Capacity	Temperature Range
WHW Constant Temperature Test Chamber Series	25L, 100L, 200L, 400L	15°C~60°C
		0°C~60°C
WGDW High-Low Temperature Test Chamber Series	100L, 200L, 400L, 600L, 800L	-20°C~150 °C
		-40°C~150 °C
		-70°C~150°C

## All-in-One Testing System series.

The battery testing system integrates with the environmental test chamber, saving experimental space.



Voltage & Current  
Accuracy  
±0.01%/0.05%F.S.




Current Response  
Time  
10/100Hz




Recording  
Frequency  
(10%F.S. ~ 90%F.S.)  
≤1ms



Sampling  
Time  
10/100ms

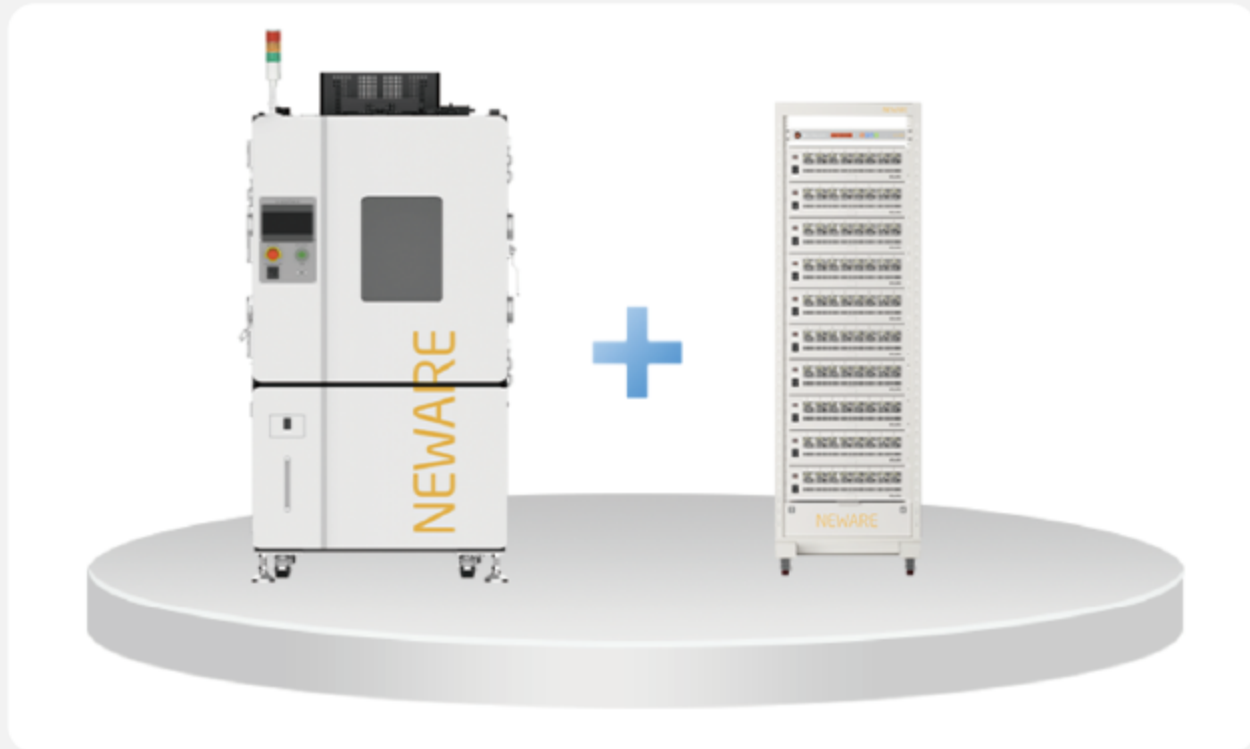

Temperature  
Deviation  
±2°C  
(No Load & Stable  
Temperature)



Temperature  
Fluctuation  
≤0.5°C  
(No Load & Stable  
Temperature)



Thermal  
Condition Test



High and Low  
Temperature Testing



Constant  
Temperature Test



Forced Circulation  
Air Cooling

## Multi-zone temperature design.

Dual-zone/-multi-zone design with independent control of each zone to increase testing efficiency.



(Single)  
WHW-25L-S-16CH  
● Size: 440x580x410mm  
● Weight: Approx.45kg

## Dedicated accessories.

Exclusive fixtures and accessories for environmental test chambers provide comprehensive support to ensure a worry-free testing process.



WGDW-380L-2-40BFC-5V600A8CH


WHW-200L-5V12A64CH

\*WHW/WGDW: Constant Temperature Chamber/High-Low Temperature Chamber  
\*All-in-One Testing System can be customized according to voltage and current requirements.  
\*Actual dimensions may differ from those marked in the picture. Please refer to the actual product for the correct size.




## Powerful cooling, reliable stability.

Equipped with a fully enclosed piston compressor for environmentally friendly refrigeration and low-noise operation.

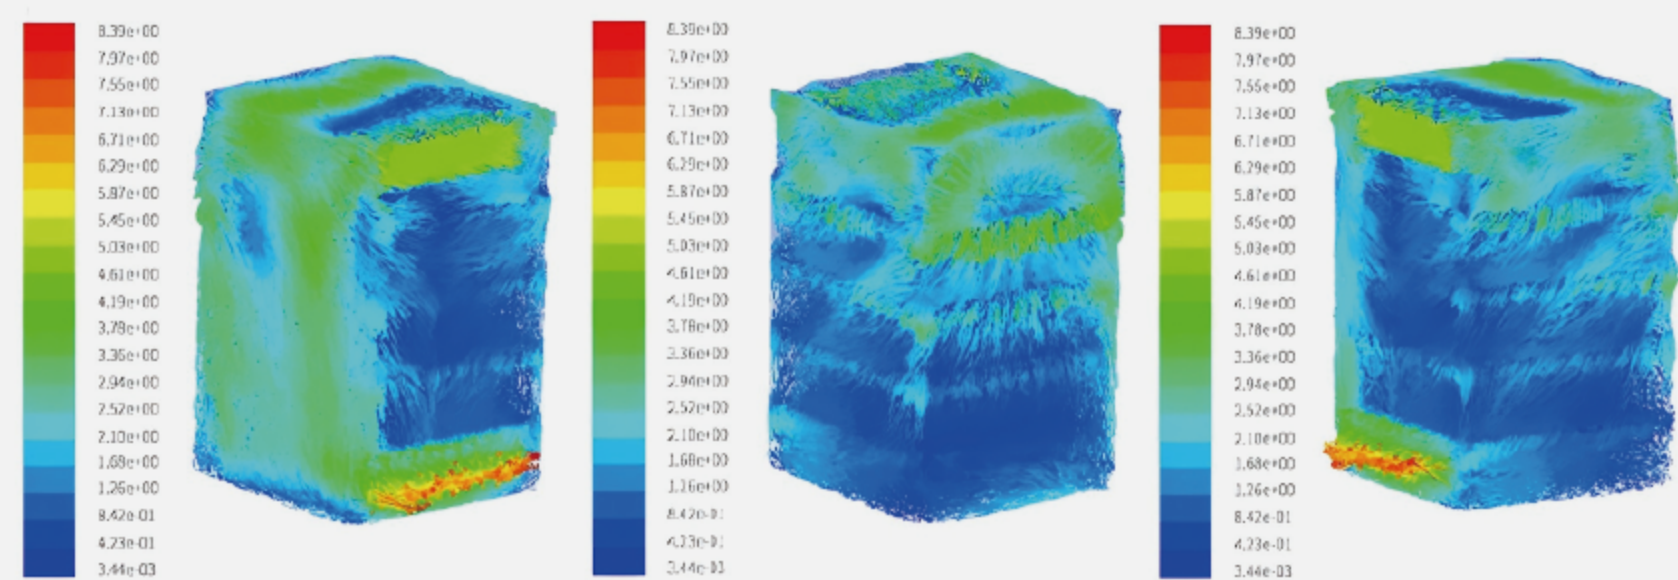

## High-efficiency battery testing.

The battery testing space is adjustable, capable of meeting the testing needs for cells of various sizes and specifications, with a maximum of 160 test channels, and supports customized clamps.

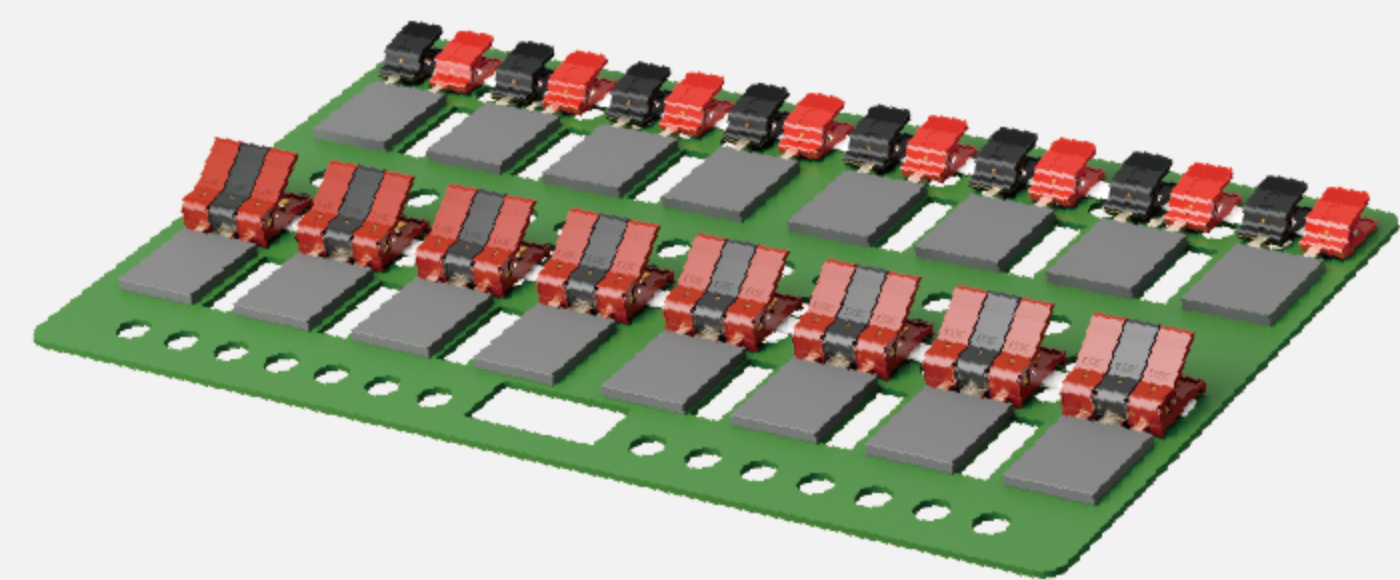

## Safety design.

A variety of safety protection devices provide comprehensive protection for battery temperature condition testing, ensuring worry-free test safety.

- Automatic pressure relief
- Smoke detection alarm
- Overtemperature protection
- Circulation fan abnormality protection




## Intuitive touch control.

The touch liquid crystal display is designed to automatically wake up the screen with infrared human sensing within 1.5m.



## Thick insulation layer protects internal temperature.

A 50mm (70mm for High-Low Temperature Chambers) polyurethane foam insulation layer is added between the outer steel plate and the inner stainless steel plate.

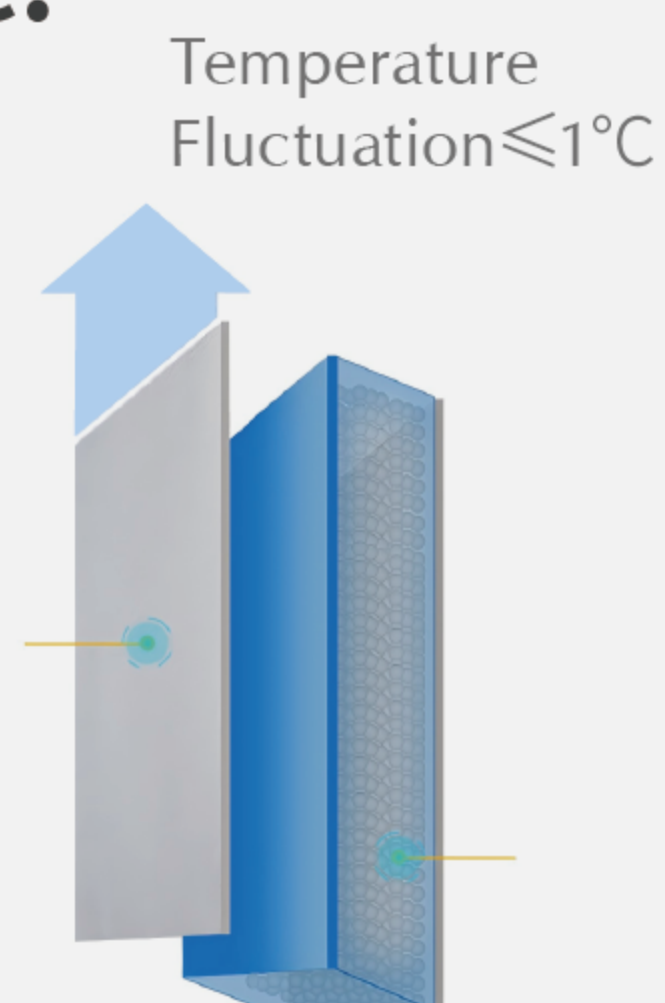

## PC control.

Integrate operation through the BTS system, synchronize battery testing with temperature control.



## Space management master, desktop testing solution.

The compact mini all-in-one unit is ideal for small-scale development and experimentation, with a usage volume of 25L and a footprint of less than 0.5m². It frees up more desktop space, integrating battery testing and temperature testing to enhance space efficiency.



\*WHW/WGDW: Constant Temperature Chamber/High-Low Temperature Chamber  
\*All-in-One Testing System can be customized according to voltage and current requirements.  
\*Actual dimensions may differ from those marked in the picture. Please refer to the actual product for the correct size.



# Measurement of Internal Resistance / Temperature / Humidity / Pressure

## Controlled precision, millisecond perfection.




### CA Temperature and Voltage Auxiliary Channels

Used in conjunction with the battery testing system, BTS intelligent testing monitors the voltage and temperature of individual cells, accurately measuring temperature and pressure to assist in battery testing.

Temperature  
Range  
-200℃ ~260℃

Voltage  
Range  
0V ~5V

Voltage  
Accuracy  
±0.1%F.S.

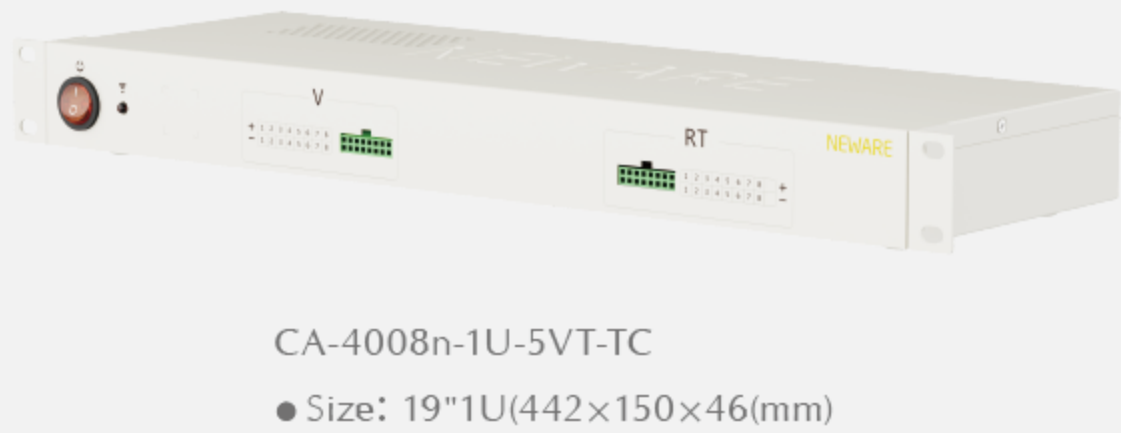

### CIR Internal Resistance Meter

Measurement of internal resistance R and voltage V of batteries, as well as equivalent resistance of supercapacitors and values of precision resistors.

Impedance  
Measurement  
Range  
0 ~3Ω

Voltage  
Measurement  
Range  
0 ~60V

Voltage Accuracy  
±0.1%

Data Storage  
1,000,000 samples

Sampling Frequency  
1 ~50PLC  
(1PLC=20ms,50Hz)  
(1PLC=16.67ms,60Hz)

Input  
Impedance  
200kΩ



### CP Pressure Auxiliary Channel

Delivers precise pressure readings, essential for applications requiring tight pressure control, and supports multiple pressure sensors for monitoring various points simultaneously, enhancing test efficiency.

Pressure Range  
10kg ~2500kg

Accuracy  
0.03%F.S.

Sampling Frequency  
1Hz



### CI Ammeter

Precisely measures current and tracks changes during battery R&D, production, and testing.

Accuracy  
0.005%F.S.

4 Ranges



### CV Voltmeter

Precisely measures voltage and monitors changes during battery R&D, production, and testing.

Accuracy  
0.005%F.S.

4 Ranges



### CT Temperature Detector

Portable for industrial field, calibrates transmitters, detects sensors, and measures temperature, with fast heating and cooling to meet quick and precise metrological needs on site.



Model	Temperature Range	Stability	Heating Time	Cooling Time	Well Depth
LCS-GJL-F10-120C	-10℃ ~122℃	±0.05℃	25℃→100℃≤10min	25℃→0℃≤10min	102mm
LCS-GJL-F45-140C	-45℃ ~140℃	±0.005℃	25℃→140℃≤30min	25℃→-45℃≤45min	160mm

\*Actual dimensions may differ from those marked in the picture. Please refer to the actual product for the correct size.



# Accessories

## Secure grip, accurate read.

Comprehensively provide a variety of auxiliary accessories needed for battery testing, including clamps, clamp holders, battery racks, etc., to achieve integrated battery testing services and all-round support to ensure a worry-free testing process.



Accessories  
Scan to learn more details



### Coin Cell



Coin Cell Clamp  
A705-P5-45B



PCB Coin Cell Clamp  
B01-DC-ZJB-mA-1.0



PCB Temperature Chamber  
Coin Cell Clamp  
B01-WX-VIBF-1.4




Coin Cell Toggle Clamp  
PPJ-19"-TP-KS-mA-8CH-KS


### Pouch Cell




Polymer Clamp  
A705-P-15A-DG

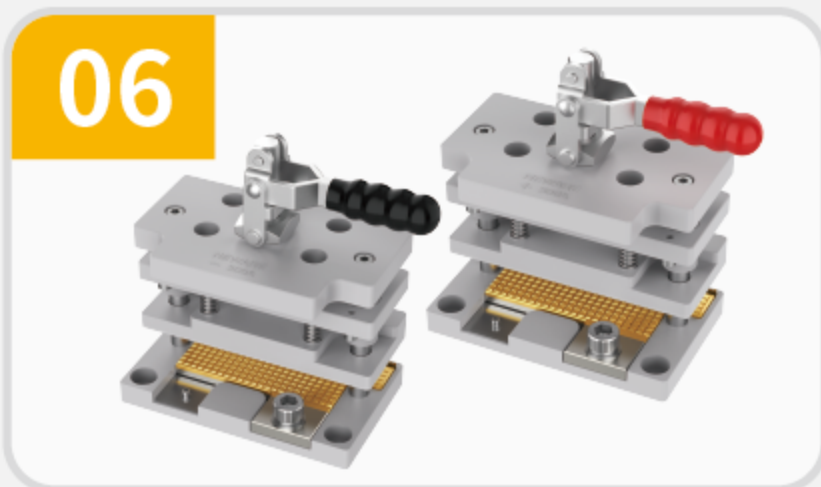

Pouch Cell Toggle Clamp  
P103-12-TZ-R-300A

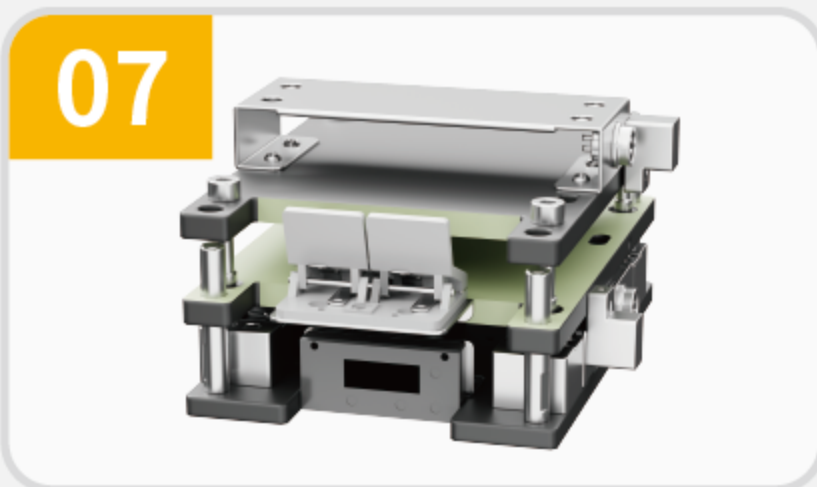

Heat Press Sensor Fixture  
PJ-RY-20A

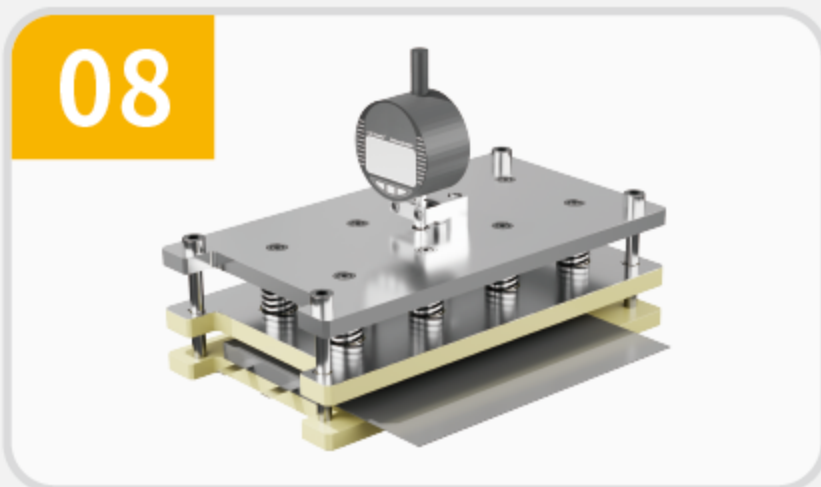

Spring Pressure Plate Fixture  
PCJ-YTH-R-F-D-190



Pouch Cell Rack  
PDCJ-R-P1-100A-32CH-D180  
• Size: 1589×507×1677mm




Pouch Cell Rack  
PDCJ-R1-P1-30A-32CH-D1  
• Size: 996×540×1637mm


### Prismatic Cell




Blade Battery Clamp  
PCJ-F2-ZJ-500A-CH-L-1M

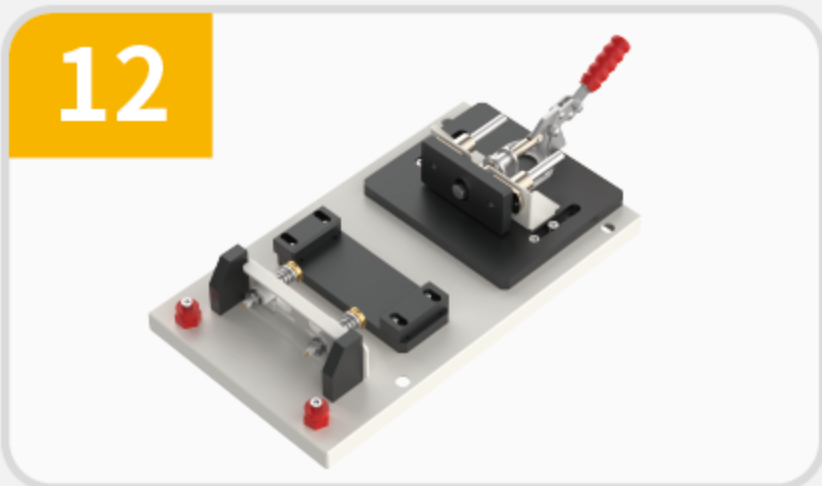

Prismatic Cell Clamp  
PTF-F-ZJ-120A-1CH-LWX

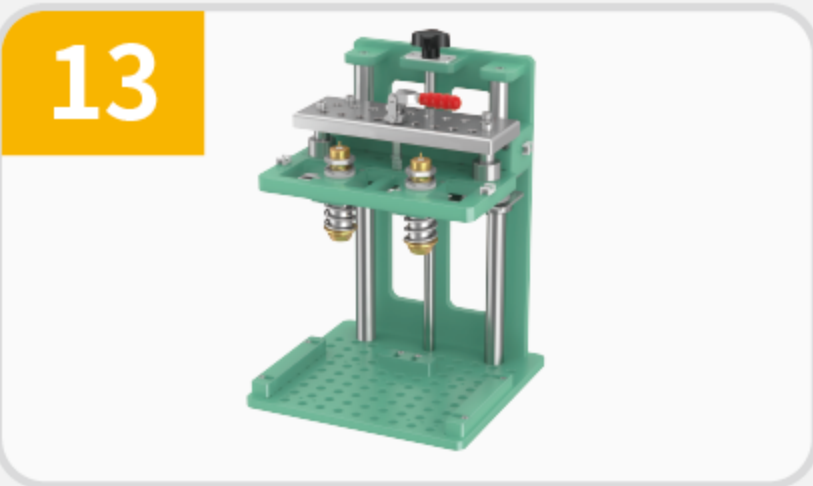

Prismatic Cell Toggle Clamp  
PCJ-YZJ-F-WX

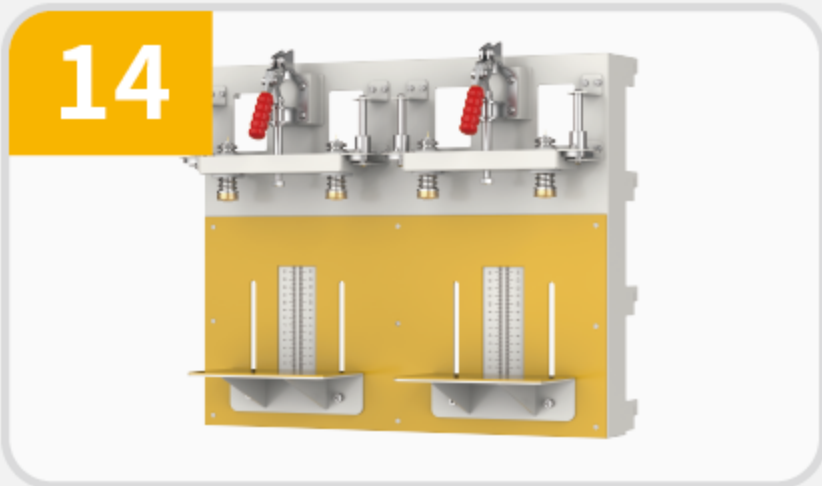

Prismatic Cell Clamp Holder  
PPJ-19"-JJMB-F1-300A-2CH-KS




Prismatic Cell Clamp Holder  
PDCJ-F1-ZJ-60A-8CH-S1  
• Size: 1300×407×1670mm



Prismatic Cell Clamp Holder  
PDCJ-F1-LS-500A-8CH-D1  
• Size: 783×400×1142mm

### Cylindrical Cell

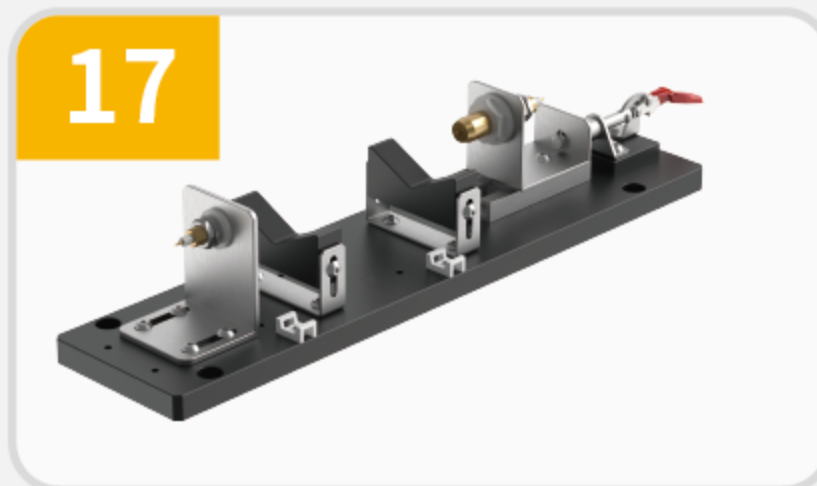

Cylindrical Cell Toggle Clamp  
PCJ-YZJ-Y-3260-100A-WX



46 Series Cylindrical  
Cell Toggle Clamp  
PTF-Y-ZJ-60A-1CH-L



Temperature Chamber Cylindrical  
Cell Clamp Holder  
PPJ-19"-HWX-JJMB-XNA  
• Size: 504×204×570mm



Cylindrical Cell Rack  
PDCJ-Y1-TJ-50A-32CH-D1  
• Size: 896×500×1096mm

\*Customizable based on current, battery size, and other requirements.  
\*Actual dimensions may differ from those marked in the picture. Please refer to the actual product for the correct size.




# BTS8.1 / BTS9.0

Hardware defines precision, software forges the future.




Scan to download  
BTS software


## Charging / Discharging Test

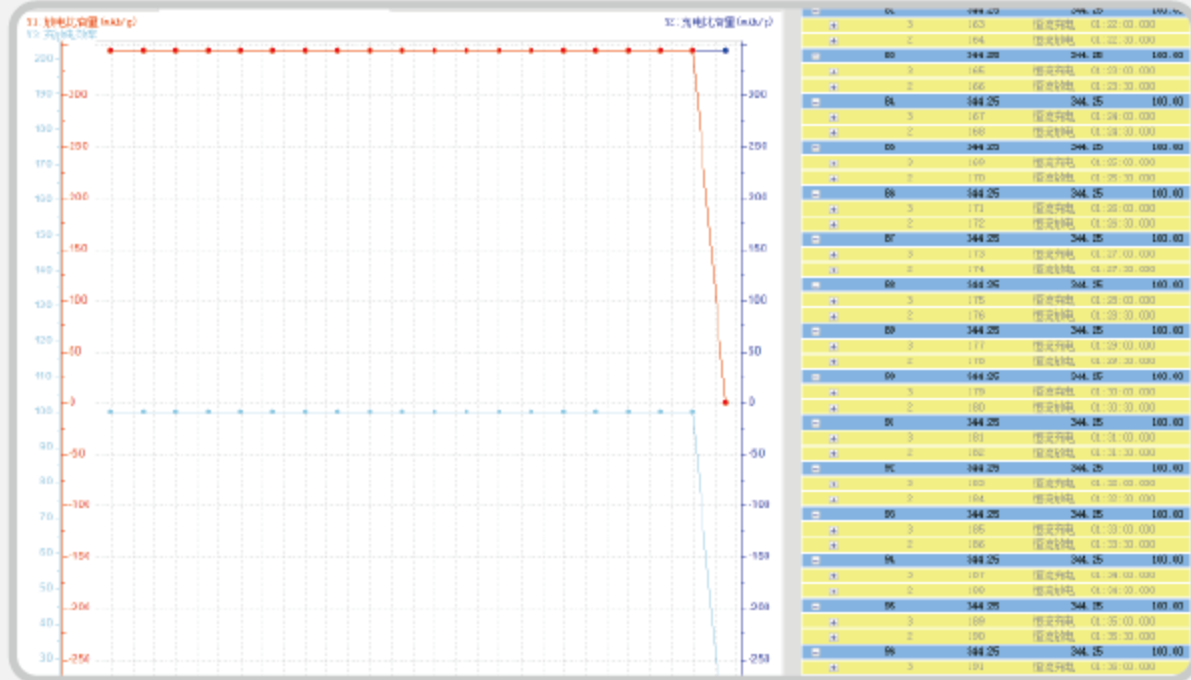

Cycle life test

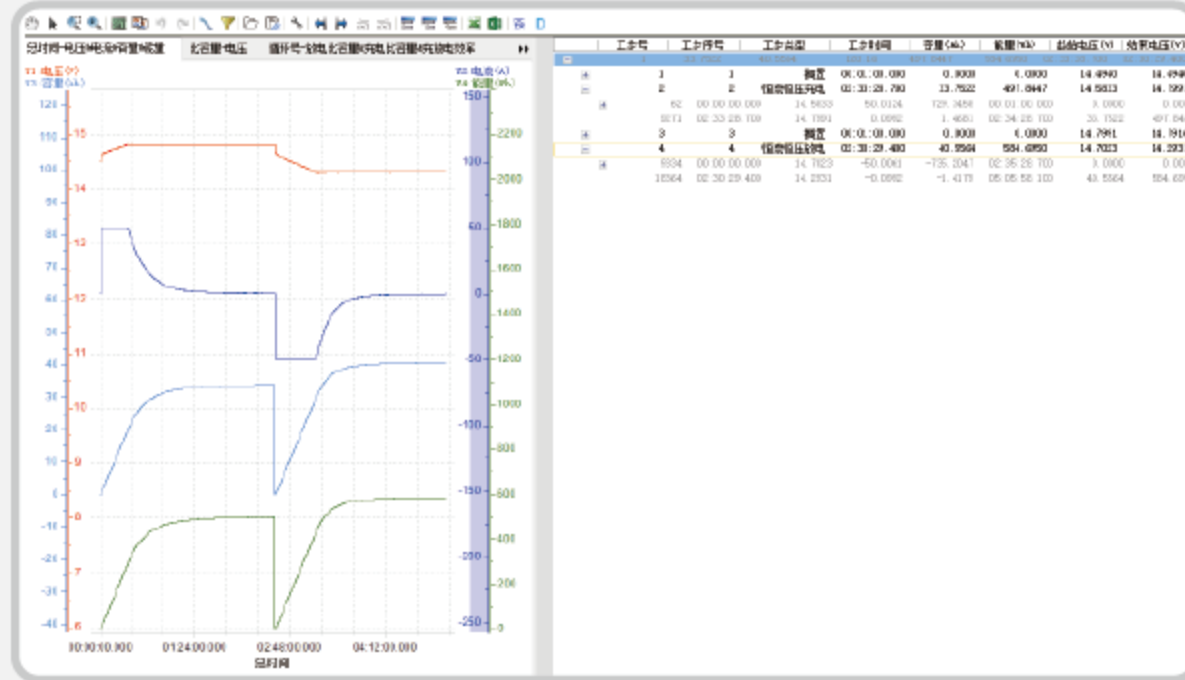

CCCV test

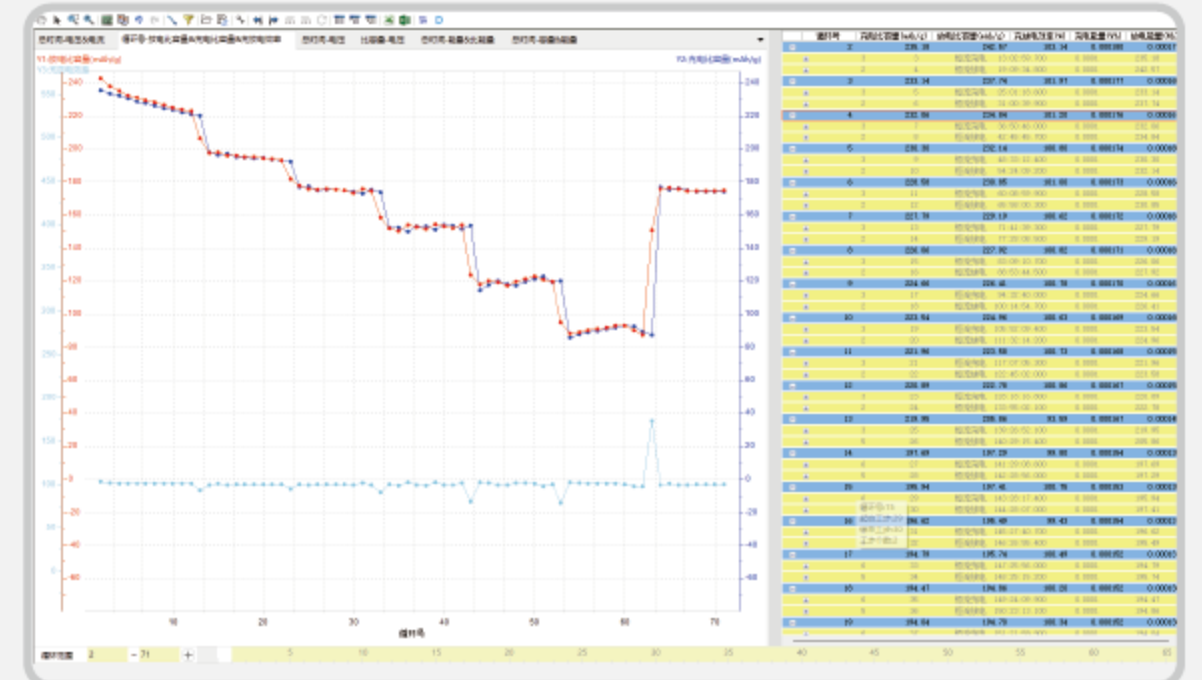


Rate test

## Galvanostatic Intermittent Titration Technique (GITT)


Step Index	Step Name	Step Time(h:mm:ss.ms)	Voltage(V)	Current(mA)	Time record condition's
1	Rest	00:01:00.000			Time record condition's Volt. lower limit:2.4V Volt. upper limit:5V
2	CC Chg	00:01:00.000		0.1	Time record condition's Volt. lower limit:2.4V Volt. upper limit:5V If Voltage>4V goto Step4
3	Rest	00:02:00.000			Time record condition's Volt. lower limit:2.4V Volt. upper limit:5V If Voltage<4V And(0) Time=119s goto Step2
4	CC DChg	00:01:00.000		0.1	Time record condition's Volt. lower limit:2.4V Volt. upper limit:5V If Voltage<2.5V goto Step6
5	Rest	00:02:00.000			Time record condition's Volt. lower limit:2.4V Volt. upper limit:5V If Voltage>3.5V And(0)

Diffusivity(D) calculation

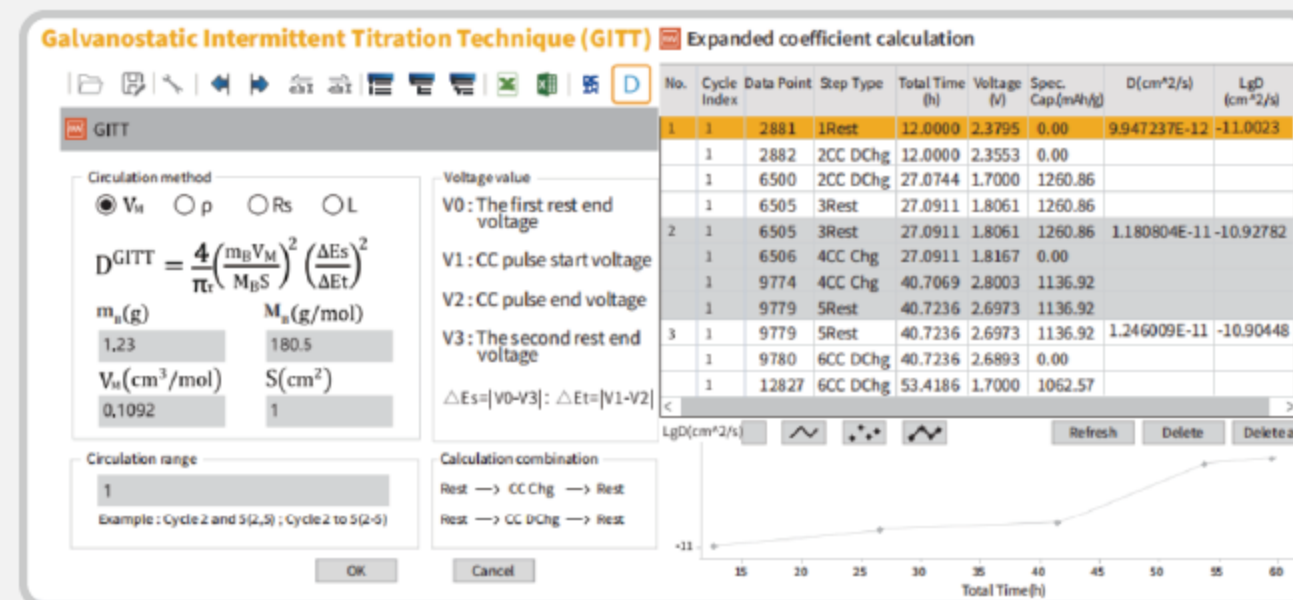


Diffusivity(D) calculation

## Potentiostatic Intermittent Titration Technique (PITT)

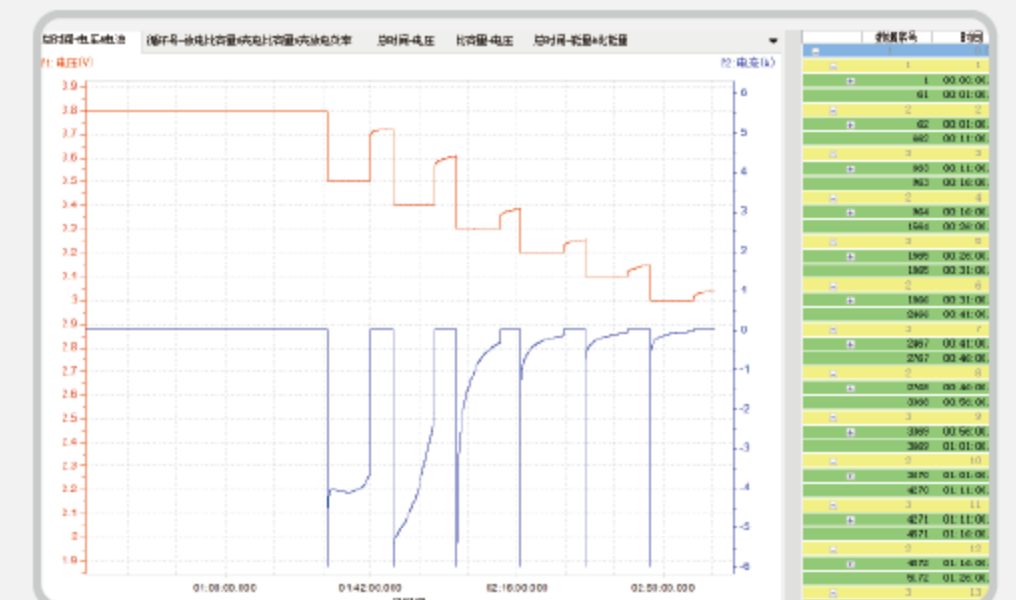


PITT test

## Incremental Capacity Analysis (ICA)

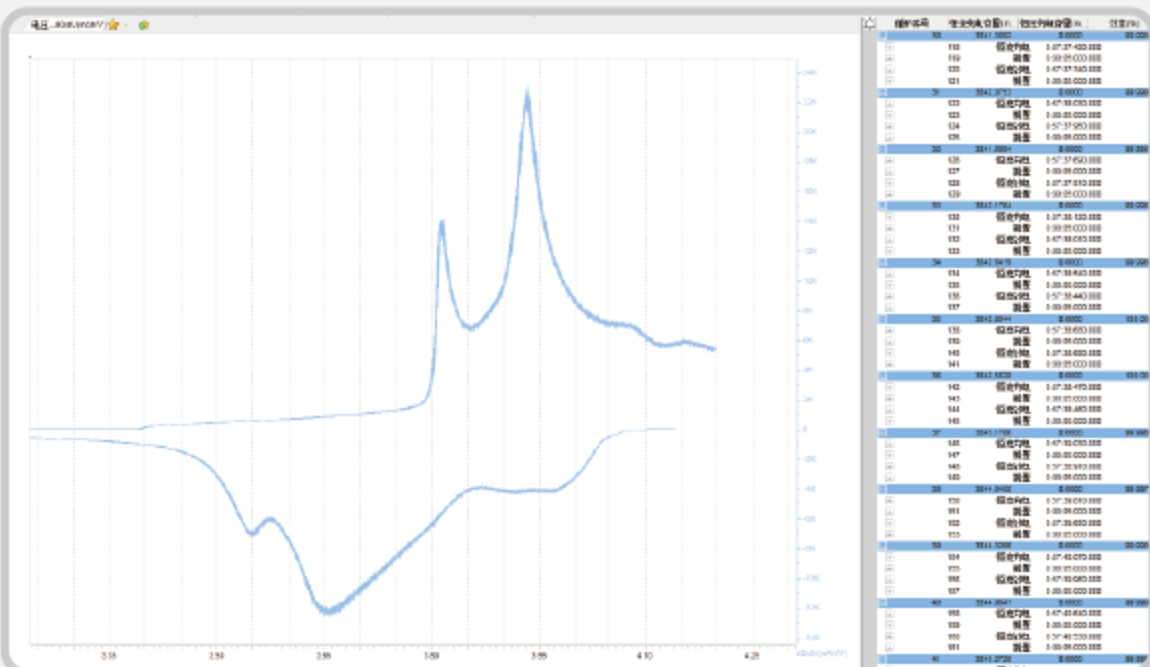


Differential capacity curve (dQ/dV)

## DC Internal Resistance (DCIR)

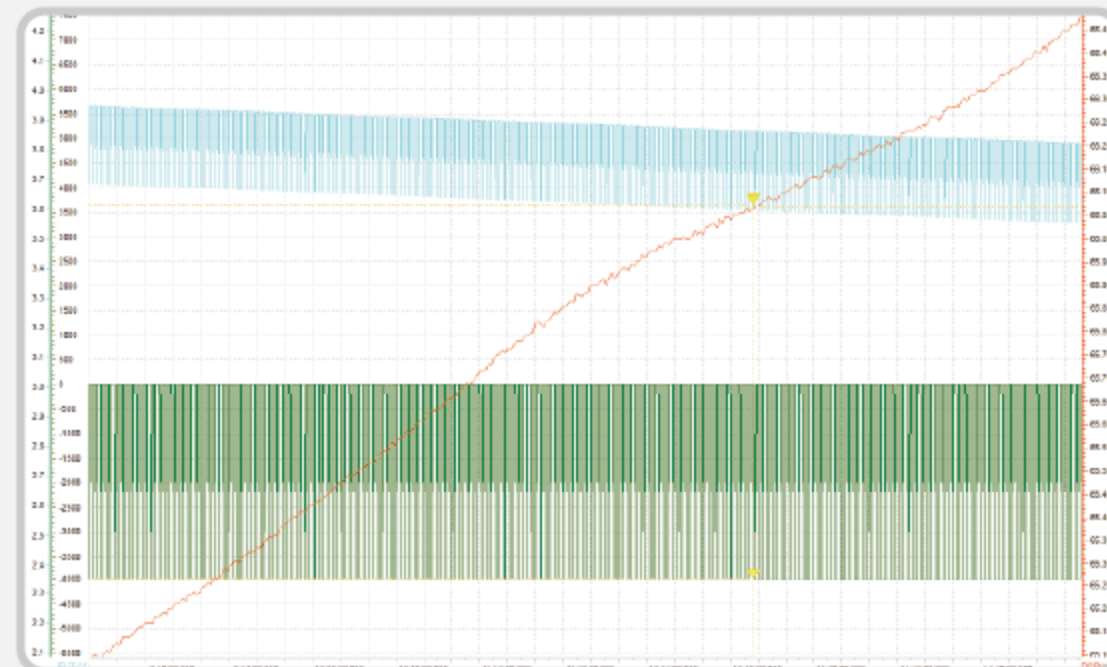


DCIR-potential & current

## Simulation Test

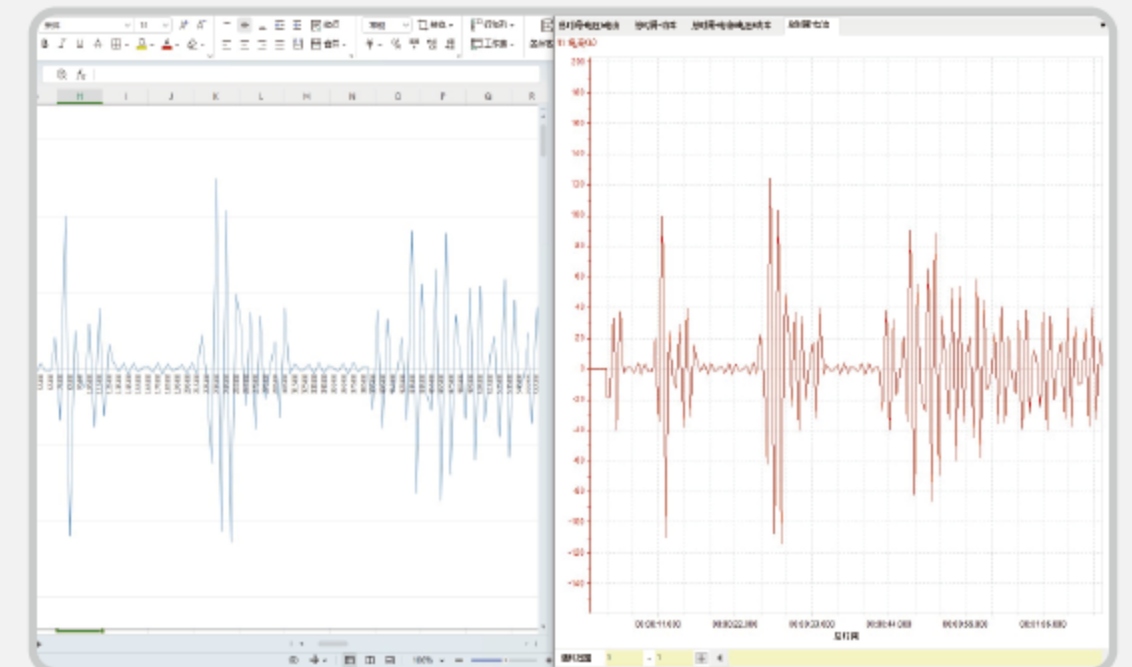


Pulse width 100ms


## Cyclic Voltammetry (CV)

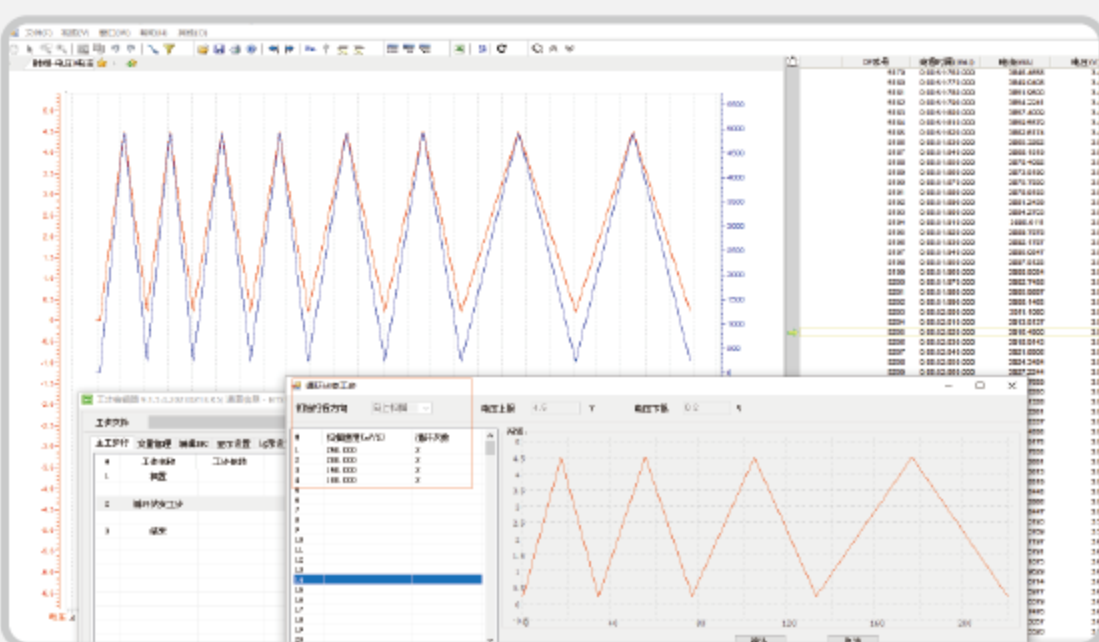

Test procedure

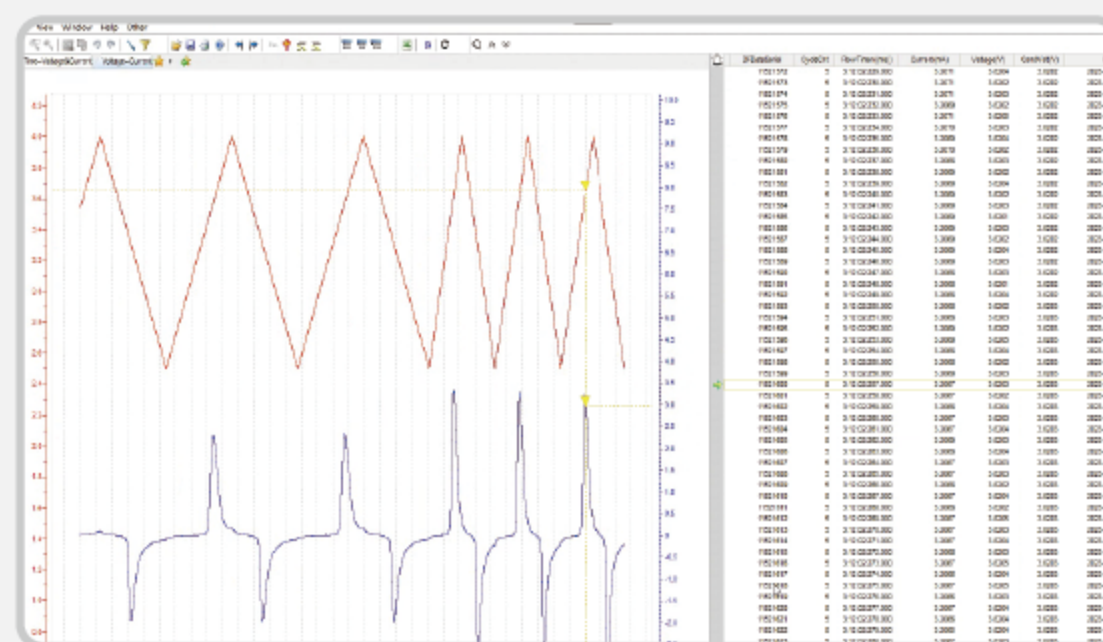

Time-potential & current

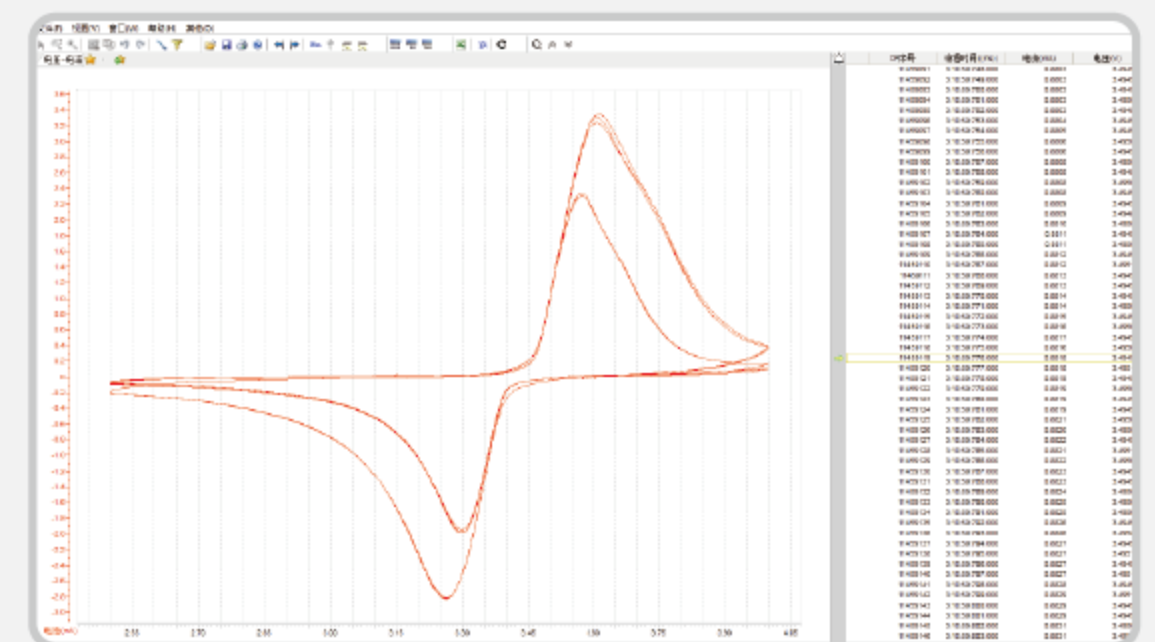

Potential-current curve

## Wherever you are, support is always near.

We're dedicated to the excellence of our equipment and the extensive coverage of our global support services, ready to provide prompt assistance for all battery cycler challenges.

We offer adaptable production to meet unique specifications, and for further enlightenment, our neware.net database is a treasure trove of informative articles, technical insights, and BTS tutorials.



Quick Start Guide



BTS Tutorials



FAQ

