



**TONGHUI ELECTRONIC**



en.tonghui.com.cn

**TECHMIZE**

Since 1994

Join hands, benefit the future

- 1994 \* Tonghui electronic was established locating in Changzhou Hi-Tech Zone.
- 1995 \* Tonghui obtained the license of manufacturing T&M instruments from the government.
- 1996 \* The first set of LCR Meter TH2811 was released. Tonghui entered into the impedance measurement industry.
- 1999 \* Tonghui won the prize of "Measuring Instruments Quality Advanced Enterprise" from Jiangsu bureau of technical supervision.  
\* Tonghui changed the name to "Tonghui Electronic Limited company".  
\* Tonghui obtained the land of 6,000m<sup>2</sup> located in Tianshan road to build the new factory.
- 2001 \* Tonghui moved to the new factory.
- 2002 \* Tonghui got ISO9000: 2000 certification.
- 2003 \* Tonghui enlarged the company size to have the land area 14000m<sup>2</sup> and construction area 8200m<sup>2</sup>.  
\* Tonghui was assessed to be "New & Hi-tech Enterprise" by the government.  
\* Tonghui joined the association of China Electronic Instrument Industry.
- 2004 \* Tonghui was awarded the "Top ten private-owned New & Hi-tech Enterprise in Changzhou Hi-tech District".
- 2006 \* Tonghui was rated as "Credit Integrity Enterprise" by Changzhou Bank Association.
- 2007 \* Tonghui won the title of "The most satisfied test instrument supplier in 2007".
- 2008 \* Tonghui established the routine laboratory to test the mechanical, temperature, humidity, safety, power adaptability, electromagnetic compatibility and other performance indicators completely.  
\* Tonghui acquired CMMI software management international certification.
- 2009 \* Tonghui was identified as "Hi-tech Enterprise of Jiangsu Province" again.  
\* Tonghui got the right to trading internationally.  
\* Tonghui brand was awarded as "Jiangsu famous-brand" by Jiangsu Quality Supervision and Management Committee.
- 2010 \* Tonghui won the title of "2009 Customer most satisfied test instrument supplier in electronic transformer industry".  
\* Tonghui won the "Top 10 most influential brands" of electronic industry in the first industrial product selection.
- 2011 \* Tonghui received the title of "Engineering Technology R&D center on Electronic Component Measurement Instrument of Changzhou City".
- 2012 \* \*Tonghui was renamed as Changzhou Tonghui Electronic Co., Ltd.  
\* The pulse peak voltmeter TH2141 won the "2012 Electronic Measuring Instrument Product Digital Voltmeter/Multi-meter Product Design Award".
- 2014 \* Tonghui's subsidiary corporation, Dongguan Tongxuan Electronic Technology Limited Company and Suzhou Jingshan Science Equipment Limited Company were established.  
\* Tonghui was awarded as "Star Enterprise of CEF" by China electronics Fair.  
\* The grand 20th anniversary ceremony was held.
- 2015 \* Tonghui was listed in the market with the stock code: 833509.  
\* The high frequency LCR meter TH2826 series won the second prize of "Changzhou Science and Technology Progress Award".
- 2016 \* Tonghui was awarded by Changzhou administration for industry and commerce as "Respect the contract and Credit Integrity Enterprise".  
\* Tonghui's trademark was recognized as a well-known trademark of Changzhou.
- 2017 \* Tonghui was awarded "2017 Changzhou innovation and entrepreneurship competition" the first prize.  
\* Tonghui was funded by the special fund of the transformation of scientific and technological achievements of Jiangsu province.  
\* Tonghui was elected as vice chairman of the 8th council of China Electronic Instrument Industry Association.
- 2019 \* Tonghui was identified as "Hi-tech Enterprise of Jiangsu Province" again.  
\* Tonghui won the second prize of the 2019 Changzhou Innovation and Entrepreneurship Competition.  
\* Tonghui won the second Prize of China Machinery Industry Science and Technology Award.
- 2020 \* Tonghui was rated as the excellent company by the government.  
\* Power electronic tester was recognized as a special new product in Jiangsu Province.  
\* The research and development of energy feedback programmable high-power DC power supply won the third prize of the 2020 Changzhou Innovation and Entrepreneurship Competition.  
\* The Precision Impedance Analyzer TH2839 series was identified as the major equipment and key components of Changzhou in 2020.
- 2021 \* Tonghui is listed on the selected layer of the National Equity Exchange System on January 11, 2021.  
\* Won the AAA corporate credit rating in August 2021.  
\* In August 2021, won the Integrity Management Enterprise  
\* First Prize of Jiangsu Innovation and Entrepreneurship Competition
- 2022 \* In September 2021, the company is relocated in No. 1, Xinzhu Road, Xinbei District, Changzhou with new buildings and production lines.  
\* Obtained the National Specialized New Small Giant Enterprise  
\* Recognized as "Jiangsu Province Enterprise Technology Center"
- 2023 \* Passed energy management system certification in 2023
- 2024 \* The grand 30th anniversary ceremony was held.



## CHANGZHOU TONGHUI ELECTRONIC CO., LTD.

[en.tonghui.com.cn](http://en.tonghui.com.cn)

■ Changzhou Tonghui Electronics Co., Ltd., founded in 1994, is a national high-tech enterprise integrating R&D, manufacturing and marketing. In September 2021, the company moved into a garden-style modern factory with 30,000 square meters land area and 30,000 square meters construction area. At present, there are more than 270 employees, 25% of which are R&D personnel. Tonghui was listed in Beijing Exchange in 2021 with the stock code 833509.

■ Since its establishment, the company has been committed to the technology and product research and development of electronic measuring instruments, especially in the field of precision impedance measurement, with nearly 30 years of accumulation of test theory, test technology and practical experience. Following the development trend of the industry, the company re-planned the development strategy of "intelligent testing, efficient testing, accurate testing, and industrial interconnection", and practiced the ingenuity of "professionalism, concentration, and concentration". Based on the in-depth understanding of the industry development prospects and the expansion of the electronic measuring instrument industry chain, the company is based on the power electronic magnetic component measuring instruments, and further develops the field of power electronic measuring instruments and complete sets of measurement system solutions, and is committed to becoming the world's leading electronic measurement instrument and integrated solution provider.

■ Tonghui currently has a product line with superior performance and rich specifications: component parameter testers, winding component testers, electrical safety test instruments, wire harness/cable testers, micro signal test instruments, power electronic test instruments, digital multimeters, data loggers, automatic power supply/battery comprehensive test systems, etc. Products are widely used in scientific research, production testing and quality management in the fields of 3C consumer electronics, 5G communications, semiconductor packaging and testing, new energy vehicles, power electronics, and household appliances. Tonghui insists on using innovative solutions to help customers solve measurement problems, improve test efficiency and product quality.

■ Looking forward to the future, Tonghui will continue to shoulder more social responsibilities with a pragmatic and steady attitude, dedicate innovation achievements and share development value with an international mind and vision. Tonghui will accurately grasp the business opportunities of the strong growth of the global electronic information industry, and realize the value of Tonghui in an all-round way.

## Index

I . Component & Device Parameter Test Instruments						
A. Semiconductor C-V Characteristic Analyzer						
 TH521 Series Semiconductor parameter analyzer	P1-5					
 TH510 Series Semiconductor C-V Characteristic Analyzer	1kHz-2MHz, C <sub>iss</sub> ,C <sub>oss</sub> ,C <sub>rss</sub> ,R <sub>g</sub> , V <sub>Ds</sub> :200V/1500V/3000V	P6-7				
B. Impedance Analyzer						
 TH2851 Series Impedance Analyzer	10Hz-130MHz	1mΩ-100MΩ (Z)	0.08%	P8-9		
 TH2848 Series Impedance Analyzer	4Hz-10MHz	0.1mHz step	0.05%	P10-13		
C. LCR Meter						
 TH2840 Series High Speed LCR Meter	20Hz-2MHz	0.1mHz	0.05%	P14-16		
 TH2836 Series LCR Meter	4Hz-8.5MHz		0.05%	P17-18		
 TH283X Series Compact LCR Meter	50Hz-200kHz	1mHz	0.05%	P19-20		
TH2810B+ LCR Meter	100Hz-10kHz	Dots Freq.	0.1%	P21		
 TH2822 Series Handheld LCR Meter	100Hz-100kHz	Dots Freq.	0.1%	P22-23		
D. Automatic Transformer Test System						
 TH2840X Series Automatic Transformer Test System	20Hz-2MHz		24-288Pin	P24-27		
 TH2829X Series Automatic Transformer Test System	20Hz-1MHz		20-192Pin	P28		
E. DC Bias Current Source						
 TH1779 DC Bias Current Source	0Hz-2MHz Frequency Response, 0-50A, parallel to 400A Max			P29		
TH1778A Series DC Bias Current Source	0Hz-2MHz			P30		
F. Microelectronics Teaching Experiment System						
TH300E Microelectronics Teaching Experiment System				P31-32		
II . Mirco Signal Type Tester						
A. PIV test system for power semiconductor devices						
 TH500 Series PIV test system for power semiconductor devices	P33-34					
B. Source Measurement Unit						
 TH199X Series precision source/measure unit	6.5 Digits, Voltage: 210V, Current: 3A/10.5A (pulse)	P35-38				
 TH193X Series Low Noise Precision Power Supply	6.5 Digits/4.5 Digits, Voltage: 210V, Current: 3A/10.5A (pulse)	P39-41				
C. fA meter/pA meter/Electrometer/High Resistance Meter						
 TH2690 Series fA meter/pA meter/Electrometer/High Resistance Meter	6.5 Digits, ±3000V, 0.01fA, 3000PΩ, 1fc	P42-44				
D. Insulation Resistance Meter						
 TH2692 Insulation Resistance Meter				P50		
 TH2684/A High Precision Insulation Resistance Meter	10V-1000V(500V)		10kΩ-100TΩ	P51-52		
 TH2683A/B Insulation Resistance Meter	1V-500V/1000V		100kΩ-10TΩ	P53		
E. Digit Multimeter						
 TH1963/A/TH1953 Digit Multimeter	1199999 Digit			P54		
F. Data Acquisition						
 TH2554 Series Data Acquisition	6 1/2 Resolution, Support 5 boards to max 160CH, 1000times/Sec			P55-56		
G. Battery Tester						
 TH2523 Series Battery Tester	100μV-350V	1μΩ-3.5kΩ	0.1%	P57		

III . Power Electronic Tester				
A. Programmable DC Power Supply				
CE TH6200 Series DC Power Supply	Dual Range, Linear	80W-216W	P58	
CE TH6300 Series DC Power Supply	Wide Range, Linear	200W-600W	P59	
NEW TH6420 Series Multi-channel Programmable Linear DC Power Supply			P60	
NEW TH6430 Series Multi-Channel Programmable Linear Source-Load Integrated Power	1-4CH, CH1/2 Source&Load, 32V/3A		P61-62	
CE TH6400 Series Triple Programmable DC Power Supply	Multi Channels, Linear	Three Channels	P63	
TH6402B DC Power Supply	Multi Channels, Linear	Four Channels	P64	
CE TH6500 Series DC Power Supply	High Precision, Linear	96W-216W	P65	
NEW TH6600 Series Programmable Bidirectional DC Power Supply	5kW-15kW, 0V-1000V, 0A-360A		P66-71	
NEW TH6600P Series Series Programmable DC Power Supply			P72-77	
NEW TH6600L Series Programmable Bidirectional DC Electronic Load			P78-83	
CE TH6700 Series Programmable Switch DC Power Supply	0-800V/0-100A	360W-1080W	P84-85	
CE NEW TH6700A Series Programmable Switch DC Power Supply			P86-87	
TH6900 Series Programmable DC Power Supply	0-1000V/0-200A	750W-3000W	P88-90	
B. Programmable AC Power Supply				
NEW TH7200 Series Programmable AC/DC PowerSupply			P91-92	
CE TH7100 Series Programmable AC Power Supply	0-300V/500W-2kW	45-500Hz	P93	
C. DC Electronic Load				
TH8200 Series Programmable DC Electronic Load			175W-1050W	P94-95
CE TH8300 Series Programmable DC Electronic Load	Module, 2/5 (2/4/5/10 Channels)	100W-400W	P96-97	
CE TH8400 Series Programmable DC Electronic Load	Economic	175W-350W	P98	
D. Multi-channel digital power meter				
CE TH3300 Series Digital Power Meter	Single Channel	0.15%, 450Hz	P99	
CE TH341X/TH342X Series Multi-channel Digital Power Meter	Single/Three/Four Channel	0.15%, 450Hz	P100	
CE TH343X/TH344X Series Multi-channel Digital Power Meter	Single/Three/Four Channel	0.1%, 100Hz	P101-102	
IV . Electrical Safety Tester and Cable Tester				
A. Hipot Tester				
CE TH9130 Series Multifunction Safety Compliance Analyzer	ACW, DCW, IR, GB, LC, Continuity, Electrical properties 7in1		P103-106	
CE NEW TH9130S Series Multifunction Safety Compliance Analyzer	ACW, DCW, IR, GB, Continuity, 5in1, 8CH option		P107-108	
TH9120 Series AC/DC Hipot Tester	TH9120A: AC10kV/20mA TH9120D: 12kV/10mA		P109	
CE TH9110 Series AC/DC Hipot Tester	AC: 5kV/100mA DC: 6kV/25mA 500VA		P110-111	
CE TH9200 Series AC/DC Hipot Tester			P112	
TH9320-S4/S8 AC/DC Hipot Tester	AC: 5kV/20mA DC: 6kV/10mA 4/8 Ch		P113	
CE TH9310/TH9320 Series AC/DC Hipot Tester	AC: 5kV/20mA DC: 6kV/10mA		P114	
B. Parallel 8-channel Hipot Tester				
CE TH9010 Series Parallel 8-channel Hipot Tester	AC: 5kV/10mA DC: 6kV/5mA	Parallel 8 Ch	P115	
C. Impulse Winding Tester				
CE TH2883S8-5/TH2883S4-5 Impulse Winding Tester	300V-5000V 4/8 Ch	≥10μH	P116-117	
CE TH2883 Series Impulse Winding Tester	100V-1200V/5000V/10000V	≥1μH	P118-119	
D. Ground Bond Tester				
CE TH9410A/TH9411A Ground Bond Tester	AC: 0-32/45A 0-600mΩ		P120	
E. Cable/Harness Tester				
NEW TH600 Series Modular Wire Harness and Cable Integrated Test System	5120CH-320CH,1μΩ, ACW:2kV, DCW:3kV		P121-123	
CE TH8601/A Cable/Harness Tester	64/128PIN		P124	
CE TH8602 Series Cable/Harness Tester	64-256PIN, Type C		P125	
CE TH8603-4 Series Cable/Harness Tester	512PIN		P126	
CE TH8610 Series Cable/Harness Tester	128PIN		P127	
V . Accessories				
Accessories			P128-130	

# Component & Device Parameter Test Instruments

## I. TH521 Series Semiconductor parameter analyzer

### Features

NEW

#### TH521 general characteristics

- Wide operating range up to 3.5kV/1800A
- Fully automatic fast thermal test from -50 °C to +250 °C
- Automatic creation of technical data for power devices (semiconductors and components)
- Automatic recording function prevents data loss
- AI-assisted writing of python test scripts



#### TH521 IV kit features

- Fully automatic fast IV measurements (Ron, BV, leakage, Vth, Vsat, etc.) for packaged and on-wafer devices
- Narrow IV pulse width (minimum 10  $\mu$ s) prevents device self-heating and more accurately tests actual device performance
- Oscilloscope view (time domain view) monitors actual voltage/current pulse waveforms for accurate measurements
- Flexible configuration expansion, adding CV and Qg, and expanding the current range from 20 A to 200 A or 600 A or 1800 A



#### TH521 Full characterization of the kit

- Full characterization of the IV kit
- Measure transistor input, output and reverse transfer capacitances (Ciss, Coss, Crss, Cies, Coes, Cres) and gate resistance (Rg) at 3.5 kV for packaged devices
- Measure gate charge (Qg) curves for packaged devices
- Calculate power losses (conduction, drive and switching losses)

### TH521 Series

#### HOST

Dimension (mm) : 430 (W)x 311 (H)x 600 (D)  
Weight: about 34.5 kg / 35kg

#### EXTENDER

Dimension (mm) : 425 (W)x 365 (H)x 590 (D)  
Weight: about 22 kg / 33.5kg

### Brief Introduction

The TH521 series semiconductor parameter analyzer is a comprehensive solution for circuit design, which can help power electronic circuit designers select power devices suitable for their applications and maximize the value of their power electronic products. It can evaluate all relevant parameters of the device under different operating conditions, including IV parameters (breakdown voltage and on-resistance), three-terminal FET capacitance, gate charge and power loss. The TH521 series semiconductor parameter analyzer for circuit design has a complete curve tracer function and other functions.

### Applications

#### ■ Semiconductor power devices

Parasitic capacitance test and C-V characteristic analysis of diodes, triodes, MOSFETs, IGBTs, thyristors, integrated circuits, optoelectronic chips, etc.

#### ■ Semiconductor materials

Wafer cutting, C-V characteristic analysis

#### ■ Liquid crystal materials

Elastic constant analysis, liquid crystal cutting

#### ■ Capacitor components

Capacitor C-V characteristic test and analysis, capacitive sensor test and analysis

# Component & Device Parameter Test Instruments

## I. TH521 Series Semiconductor parameter analyzer

### Model

TH521-35-20	IV: 3500V/20A	TH521-35-600	IV: 3500V/600A
TH521-35-20C	IV: 3500V/20A, CV: 10MHz, Qg	TH521-35-600C	IV: 3500V/600A, CV: 10MHz, Qg
TH521-35-200	IV: 3500V/200A	TH521-35-1800	IV: 3500V/1800A
TH521-35-200C	IV: 3500V/200A, CV: 10MHz, Qg	TH521-35-1800C	IV: 3500V/1800A, CV: 10MHz, Qg

### Specifications

MCSMU			
Voltage range, resolution and accuracy			
Voltage range	Output/measurement resolution	Output/measurement accuracy(% + mV + mV)	Max Current
200mV	100nV	$\pm(0.06 + 0.14 + I_o \times 0.05)$	1A
2V	1μV	$\pm(0.06 + 0.6 + I_o \times 0.5)$	1A
20V	10μV	$\pm(0.06 + 3 + I_o \times 5)$	1A
40V	40μV	$\pm(0.06 + 3 + I_o \times 10)$	1A
Current range, resolution and accuracy			
Current range, resolution and accuracy	Output/measurement resolution	Output/measurement accuracy(% + A + A)	Max Voltage
10μA	10pA	$\pm(0.06 + 1E-8 + V_o \times 1E-10)$	30V
100μA	100pA	$\pm(0.06 + 2E-8 + V_o \times 1E-9)$	30V
1mA	1nA	$\pm(0.06 + 2E-7 + V_o \times 1E-8)$	30V
10mA	10nA	$\pm(0.06 + 2E-6 + V_o \times 1E-7)$	30V
100mA	100nA	$\pm(0.06 + 2E-5 + V_o \times 1E-6)$	30V
1A	1μA	$\pm(0.4 + 2E-4 + V_o \times 1E-5)$	30V
Typical resolution	6½ Digits		
Maximum voltage	±30V		
Minimum current	10pA		
Maximum pulse duty cycle	5%(When the peak value exceeds 100mA)		
Minimum pulse width	10μs		
Maximum pulse width	100ms (When the peak value exceeds 100mA)		
Maximum DC current	±100mA		
Maximum pulse peak value	±1A		
Maximum pulse base value	±50mA(When the peak value exceeds 100mA)		

# Component & Device Parameter Test Instruments

## I. TH521 Series Semiconductor parameter analyzer

HCSMU			
Voltage range, resolution and accuracy			
Voltage range	Output/measurement resolution	Output/measurement accuracy(% + mV + mV)	Max Current
100mV	100nV	$\pm(0.06 + 0.6 + I_o \times 0.05)$	20A
1V	1μV	$\pm(0.06 + 0.6 + I_o \times 0.5)$	20A
10V	10μV	$\pm(0.06 + 3 + I_o \times 5)$	20A
40V	40μV	$\pm(0.06 + 3 + I_o \times 10)$	1A
Current range, resolution and accuracy			
Current range, resolution and accuracy	Output/measurement resolution	Output/measurement accuracy(%+A+A)	Max Voltage
10μA	10pA	$\pm(0.06 + 1E-8 + V_o \times 1E-10)$	40V
100μA	100pA	$\pm(0.06 + 2E-8 + V_o \times 1E-9)$	40V
1mA	1nA	$\pm(0.06 + 2E-7 + V_o \times 1E-8)$	40V
10mA	10nA	$\pm(0.06 + 2E-6 + V_o \times 1E-7)$	40V
100mA	100nA	$\pm(0.06 + 2E-5 + V_o \times 1E-6)$	40V
1A	1μA	$\pm(0.4 + 2E-4 + V_o \times 1E-5)$	40V
20A	20μA	$\pm(0.4 + 2E-3 + V_o \times 1E-4)$	20V
Typical resolution	6½ Digits		
Maximum voltage	±40V		
Minimum current	10pA		
Maximum pulse duty cycle	1%(When the peak value exceeds 1A)		
Minimum pulse width	50μs		
Maximum pulse width	1ms(When the peak value exceeds 1A)		
Maximum DC current	±100mA		
Maximum pulse peak value	±20A		
Maximum pulse base value	±100mA (When the peak value exceeds 1A)		

MPSMU			
Voltage range, resolution and accuracy			
Voltage range	Output/measurement resolution	Output/measurement accuracy(% + mV + mV)	Max Current
100mV	100nV	$\pm(0.06 + 0.14 + I_o \times 0.05)$	100mA
1V	1μV	$\pm(0.06 + 0.6 + I_o \times 0.5)$	100mA
10V	10μV	$\pm(0.06 + 3 + I_o \times 5)$	100mA
100V	100μV	$\pm(0.012 + 2.5 + I_o \times 10)$	20mA(≥40V) 50mA(≤40V)
Current range, resolution and accuracy			
Current range, resolution and accuracy	Output/measurement resolution	Output/measurement accuracy(%+A+A)	Max Voltage
1nA	1fA	$\pm(0.1 + 2E-13 + V_o \times 1E-15)$	100V
10nA	10fA	$\pm(0.1 + 1E-12 + V_o \times 1E-14)$	100V
100nA	100fA	$\pm(0.05 + 2E-11 + V_o \times 1E-13)$	100V
1μA	1pA	$\pm(0.05 + 1E-10 + V_o \times 1E-12)$	100V
10μA	10pA	$\pm(0.04 + 2E-9 + V_o \times 1E-11)$	100V
100μA	100pA	$\pm(0.03 + 3E-9 + V_o \times 1E-10)$	100V
1mA	1nA	$\pm(0.03 + 6E-8 + V_o \times 1E-9)$	100V
10mA	10nA	$\pm(0.03 + 2E-7 + V_o \times 1E-8)$	100V
100mA	100nA	$\pm(0.04 + 6E-6 + V_o \times 1E-7)$	20V
Typical resolution	6½ Digits		
Maximum voltage	±100V		
Minimum current	1fA		

# Component & Device Parameter Test Instruments

## I. TH521 Series Semiconductor parameter analyzer

HVSMU			
Voltage range, resolution and accuracy			
Voltage range	Output/measurement resolution	Output/measurement accuracy(% + mV)	Max Current
200V	200µV	±(0.03+40)	8mA
500V	500µV	±(0.03+100)	8mA
1500V	1.5mV	±(0.03+300)	8mA
3500V	3.5mV	±(0.03+600)	4mA
Current range, resolution and accuracy	Output/measurement resolution	Output/measurement accuracy(%+A+A)	Max Voltage
10nA	10fA	±(0.1 + 1E-9 + Vo x 8E-12)	3500V
1µA	1pA	±(0.05 + 1E-9 + Vo x 8E-12)	3500V
100µA	100pA	±(0.03 + 3E-9 + Vo x 1E-11)	3500V
10mA	10nA	±(0.03 + 2E-7+ Vo x 1E-9)	1750V
Typical resolution	6½ Digits		
Maximum voltage	±3500V		
Minimum current	10fA		

UHCU			
Voltage range, resolution and accuracy			
Voltage range	Output/measurement resolution	Output/measurement accuracy(% + mV)	
60V	100µV	±(0.2+10)	
Current range, resolution and accuracy	Output/measurement resolution	Output/measurement accuracy(%+A+A)	
200A	200uA	±(0.6 + 0.3 + 0.01*Vo)	
600A	500uA	±(0.6 + 0.3 + 0.01*Vo)	
1800A	2mA	±(0.8 + 0.9 + 0.02*Vo)	
Maximum pulse duty cycle	0.4%(600A range); 0.1%(1800A range)		
Minimum pulse width	10µs		
Maximum pulse width	1ms(600A range); 500µs(1800A range)		
Maximum pulse base value	200A,600A,1800A range		

# Component & Device Parameter Test Instruments

## I. TH521 Series Semiconductor parameter analyzer

MFCMU	
Frequency range	1kHz to 10MHz
Minimum frequency resolution	1mHz
Frequency accuracy	$\pm 0.005\%$
DC bias	0 to $\pm 40V$

# Component & Device Parameter Test Instruments

## I. TH510 Series Semiconductor C-V Characteristic Analyzer

### Features

- Integrated design: LCR+gate voltage  $V_{GS}$ +drain voltage  $V_{DS}$ +channel switching+host computer software
- Gate voltage  $V_{GS}$ : 0 - ±40V
- Drain voltage  $V_{DS}$ : 0 - ±200V/±1500V/±3000V
- Single tube device (spot test), module device (list scan), curve scan (optional)
- Three testing methods
- Four parasitic parameters ( $C_{iss}$ ,  $C_{oss}$ ,  $C_{rss}$ ,  $R_g$  or  $C_{ies}$ ,  $C_{oes}$ ,  $C_{res}$ ,  $R_g$ )
- One-click measurement and display on the same screen
- Standard 2 channels, expandable to 6 channels, capable of testing single tube, multi-core or module devices (TH511E/TH513 only has 1 channel)
- CV curve scan,  $C_{iss}$ - $R_g$  curve scan
- Capacitor fast charging technology enables fast testing
- Contact Check Cont
- Continuity test OP\_SH
- Automatic delay setting
- Crss Plus function: solve the problem of negative  $C_{rss}$  value at high frequency
- High-voltage breakdown protection: DS instantaneous short circuit to protect the instrument
- Interlock safety lock function: add high-voltage protective wall (TH513 only)
- Cs-V function: test and analysis of diode junction capacitance CV characteristics
- Equivalent mode conversion function, optional Cs or Cp mode
- 10 levels of sorting



RS232	LAN	HANDER	USB HOST	USB DEVICE	RS485
standard	standard	standard	standard	standard	option

### TH510 Series

Dimension: 430(W)x177(H)x265(D)

Weight : about 16kg

### Applications

#### ■ Semiconductor components/Power components

Parasitic capacitance test and C-V characteristic analysis of diodes, triodes, MOSFETs, IGBTs, thyristors, integrated circuits, optoelectronic chips, etc.

#### ■ Semiconductor material

Wafer dicing, C-V characteristic analysis

#### ■ Liquid crystal material

Elastic constant analysis

### Specifications

Model	TH511	TH512	TH513
Channel	2 (4/6 Ch Optional)		1
Display	10.1-inch capacitive touchscreen		
Display	Ratio	16:9	
Display	Resolution	1280×RGB×800	
Test Parameter		$C_{iss}$ , $C_{oss}$ , $C_{rss}$ , $R_g$ . Four parameter selectable arbitrarily	
Test Frequency	Range	10kHz-2MHz	
Test Frequency	Accuracy	0.01%	
Test Frequency	Resolution	10mHz 1.00000kHz-9.99999kHz 100mHz 10.0000kHz-99.9999kHz 1Hz 100.000kHz-999.999kHz 10Hz 1.00000MHz-2.00000MHz	
Test Level	Voltage Range	5mVrms-1Vrms	
Test Level	Accuracy	± (10% x Setting Value+2mV)	
Test Level	Resolution	1mVrms 5mVrms-1Vrms 10mVrms 1Vrms-2Vrms	
$V_{GS}$	Range	0 - ±40V	
$V_{GS}$	Accuracy	1% x Setting Voltage+8mV	
$V_{GS}$	Resolution	1mV 0V - ±10V	
$V_{DS}$	Range	0 - ±200V	0 - ±1500V
$V_{DS}$	Accuracy	1%×Setting Voltage + 100mV	0 - ±3000V
Output Impedance		100Ω, ±2%@1kHz	
Computation		Absolute deviation $\Delta$ from nominal value, percent deviation from nominal value $\Delta\%$	

# Component & Device Parameter Test Instruments

## I. TH510 Series Semiconductor C-V Characteristic Analyzer

Calibration Function	OPEN, SHORT, LOAD	
Measure Average	1-255 times	
AD Conversion Time (ms/time)	Fast+: 2.5ms (> 5kHz), Fast: 11ms, Middle: 90ms, Slow: 220ms.	
Basic Accuracy	0.1%	
$C_{ISS}, C_{OSS}, C_{RSS}$	0.00001pF - 9.99999F	
$R_g$	0.001mΩ - 99.9999MΩ	
$\Delta\%$	$\pm$ (0.000% - 999.9%)	
Multi-Function Parameter List Scan	Spots	20 spots, the average number can be set for each spot, and each spot can be sorted separately
	Parameter	Test Frequency, $V_g$ , $V_d$ , Channel
	Trigger Mode	Sequence SEQ: After one trigger, measure at all sweep points, /EOM/INDEX output only once. Step: perform a sweep point measurement per trigger, each point outputs /EOM/INDEX, but the list scan comparator result is only output at the last /EOM
Graphic Scan	Scanning Spots	Any Spot is optional, up to 1001 Spots
	Result Display	Multiple curves with the same parameter and different $V_g$ ; multiple curves with the same $V_g$ and different parameters.
	Display Range	Real-time automatic, locked
	Coordinate ruler	Logarithmic, linear
	Parameter	$V_g, V_d$
	Trigger Mode	Manual trigger once, complete one scan from the start spot to the end spot, and start a new scan with the next trigger signal Continuous Infinite loop scan from the start spot to the end spot
Comparators	Result Storage	Graphics, files
	Bin	10Bin,PASS,FAIL
	Bin Deviation Setting	Deviation, Percent Deviation, Off
	Bin Mode	Tolerance, continuous
	Bin Count	0-99999
	Bin Judgement	A maximum of four parameter limit ranges can be set for each bin. The corresponding bin number will be displayed within the setting range of the four test parameter results. If it exceeds the set maximum bin number range, FAIL will be displayed. Test parameters without upper and lower limits will be automatically ignored.
Data Storage	PASS/FAIL indication	Satisfy Bin1-10, the PASS light on the front panel is on, otherwise the FAIL light is on.
	Internal	About 100M non-volatile memory test setup file
	External USB	Test setup files, screenshots, log files
Keyboard Lock		Lockable front panel buttons, other functions to be expanded
Interface	USB HOST	2 USB HOST interfaces, which can be connected to the mouse and keyboard at the same time, and only one U disk can be used at the same time
	USB DEVICE	Universal Serial Bus socket, small type B (4 contact positions); compliant with USB TMC-USB488 and USB2.0, female connector for connecting external controllers.
	LAN	10/100M Ethernet, 8 pins, two speed options
	HANDLER	Used for Bin signal output
	RS232C	Standard 9-pin, crossed
	RS485	Can receive modification or external RS232 to RS485 module
Boot Warm-up Time	60 Minutes	
Power consumption	100-120VAC/198-242VAC Option, 47-63Hz	
Power consumption	More than 130VA	
Dimensions (WxHxD) mm	430x177x405	
Weight	16kg	

# Component & Device Parameter Test Instruments

## I. TH2851 Series Impedance Analyzer

### Features

- Test frequency: 10Hz-130MHz
- High precision: using automatic balance bridge technology, four-terminal pair test configuration
- High stability and consistency
- High speed: the fastest test speed up to 5ms
- High resolution: 10.1-inch capacitive touch screen, resolution 1280\*800
- Three test methods: point test, list scan, and graph scan
- 1601 point multi-parameter list scanning function
- Four-parameter measurement
- 4-channel graphic scanning function, each channel can display 4 curves, 16 kinds of split-screen display modes for channels and curves
- Graphic scanning mode, each curve is sorted individually
- High compatibility: Support SCPI instruction set, compatible with KEYSIGHT E4990A, E4980A, E4980AL, HP4284A

### Applications

#### Passive component

Impedance parameter estimation and performance analysis of capacitor, inductor, magnetic core, resistor, piezoelectric devices, transformers, chip components and network components

#### Semiconductor component

Parasitic parameter test and analysis of LED driver integrated circuit C-VDC features of varactors

Parasitic parameter analysis of transistors or integrated circuit

#### Other components

Impedance assessment of printed circuit boards, relays, switches, cables, batteries



TH2851 Series

Dimension: 428mm(W)x220mm(H)x325mm(D)

Weight: 14.5kg

#### Dielectric material

Dielectric constant and loss angle evaluation of plastics, ceramics and other materials

#### Magnetic materials

Magnetic permeability and loss angle assessment of ferrite, amorphous body and other magnetic materials

#### Semiconductor materials

Dielectric constant, electrical conductivity and C-V characteristics of semiconductor materials

#### Liquid crystal cell

Dielectric constant, elastic constant and C-V characteristics of liquid crystal cell

### Specifications

Model	TH2851-015	TH2851-030	TH2851-050	TH2851-080	TH2851-130
Display	10.1 Inches TFT LCD Display 1280×RGB×800, Touch Screen				
AC Parameter	Cp/Cs, Lp/Ls, Rp/Rs,  Z ,  Y , R, X, G, B, θ, D, Q, V <sub>AC</sub> , I <sub>AC</sub>				
DC Parameter	V <sub>DC</sub> , I <sub>DC</sub> , DCR				
Test Frequency	Range	10Hz--15MHz	10Hz--30MHz	10Hz--50MHz	10Hz--80MHz
	Resolution	1mHz			
	Relative frequency tolerance	≤±0.0007%			
Test Level	AC Voltage	5mV—2Vrms			
	Resolution	1mV			
	AC Current	50uA—20mAmps			
	Resolution	10uA			
DC Bias	Voltage	0V-±40V			
	Resolution	1mV			
	Current	0mA-±100mA			
	Resolution	40μA			
Test terminal configuration	Four Terminal Pair				
Output impedance	25Ω / 100Ω				
Typical Test time (Speed)	Five Shift: 1(Fast)—5(Accuracy) 1: 2.5ms 2: 10ms 3: 40ms 4: 80ms 5: 400ms (Does not include the arithmetic average of the communication time, each frequency test speed will be slightly different)				

# Component & Device Parameter Test Instruments

## I. TH2851 Series Impedance Analyzer

Max Accuracy	1kHz: 0.08% 1MHz: 0.08% 2MHz: 0.5% 10MHz: 1% 130MHz: 5.0%
Test Range	$E: 1 \times 10^{18}$
$C_s, C_p$	-9.99999EF ~ +9.99999EF
$L_s, L_p$	-9.99999EH ~ +9.99999EH
$D$	-9.99999E ~ +9.99999E
$Q$	-9.99999E ~ +9.99999E
$R, R_s, R_p, X, Z, R_{DC}$	-9.99999EΩ ~ +9.99999EΩ
$G, B, Y$	-9.99999ES ~ +9.99999ES
$V_{DC}$	-9999V ~ +9999V
$I_{DC}$	-9999mA ~ +9999mA
$\theta_r$	-999999rad ~ +999999rad
$\theta_d$	-180.0deg ~ +180.0deg
$\Delta\%$	-999999% ~ +999999%
Multi-function parameter list scan	1601 points, each point can be set to average, and each point can be sorted separately Sweep parameters: measurement parameters, test frequency, AC voltage, AC current, DC BIAS voltage, DC BIAS current
Graphic scan	Parameter: Frequency, ACV, ACI, DCV, DCI
	Types: Logarithmic, linear, frequency segmentation
	Points: 2-1601
	Number of channels: 4
	Number of curves: 4 Per Channel
	Split Screen: 14 split-screen methods, 16 curves
Equivalent circuit analysis	3-element model: 4, 4-element model: 3
Sorting	10 levels of sorting in LCR mode; each curve in scan mode is sorted individually
Interface	RS232C, USB HOST, USB DEVICE, LAN, GPIB, HANDLER, VGA, HDMI
Power-on warm-up time	60 Minutes
Input Voltage	100-120VAC/198-242VAC Option, 47-63Hz
Power consumption	Max 150VA
Measurement (WxHxD) mm <sup>3</sup>	428x220x325
Weight	14.5kg

### Standard Accessories

TH26010 Gold-plated short circuit board  
TH26005D Test fixture  
TH26047A Test fixture

TH26082A 100Ω Standard Resistance  
TH26061D\_P1 Calibration Kit  
AR05TTS1000N

# Component & Device Parameter Test Instruments

## I. TH2848 Series Impedance Analyzer

### Features

- High resolution: 10.1 inches, resolution 1280\*800, capacitive touch screen
- High precision: automatic balanced bridge technology, four-end pair test configuration
- High stability and consistency: 15 range configurations
- High power: Signal level: 20VAC /100mAAC Built-in DC bias:  $\pm 40$ VDC /100mADC
- High speed: dual CPU architecture, the fastest test speed up to 400 times / s (2.5ms)
- Convenient operation: Linux operating base, touch operation, embedded help
- Three types of tests: spot test, list scan, and graphic scan
- Four-parameter measurement
- One-click recording, one-click screenshot
- 201-point multi-parameter list scanning function
- Graphic scanning function, 4 tracks at will, support 1/2/4 split screen
- Piezoelectric conductivity circle test, dielectric constant test
- Powerful sorting: LCR mode: 10levels of sorting Graphical analysis mode: support curvecondition sorting
- High compatibility: supports SCPI/MODBUS command set. Compatible with KEYSIGHT E4980A, E4980AL, HP4284A
- Independent 24V cylinder control



RS232	GPIB	LAN	HANDER
standard	standard	standard	standard
USB HOST	USB DEVICE	RS485	External DCI
standard	standard	standard	standard

### TH2848 Series

Dimension: 430mm(W)x177mm(H)x265mm(D)  
Weight: 11kg

#### ■ Magnetic material

Evaluation of permeability and loss angle of ferrites, amorphous and other magnetic materials

#### ■ Semiconductor materials

Dielectric constant, electrical conductivity and C-V properties of semiconductor materials

#### ■ Liquid crystal materials

C-V characteristics such as dielectric constant and elasticity constant of liquid crystal units

#### ■ Piezoelectric materials and devices

Piezo Ceramic Filters, Piezo Ceramic Trap, Piezo Ceramic Discriminator, Piezo Ceramic Transformer, High Power Ultrasonic Generator, Transducer (Oscillator), Surface acoustic wave devices, electroacoustic devices, etc. can be tested such as static capacitance, loss, resonance frequency, anti-resonance frequency, mechanical coupling coefficient and other parameters.

### Applications

#### ■ Passive components

Evaluation of impedance parameters and performance analysis of capacitors, inductors, cores, resistors, piezoelectric devices, transformers, chip assemblies, crystals, and network components.

#### ■ Semiconductor component

Parasitic parameter testing and analysis of LED driver integrated circuits; C-VDC characterization of varactor diodes; parasitic parameter analysis of transistors or integrated circuits

#### ■ Other components

Impedance evaluation of printed circuit boards, relays, switches, cables, batteries, etc.

#### ■ Medium Material

Evaluation of dielectric constants and loss angles of plastics, ceramics and other materials.

### Specifications

Product Model	TH2848-02L	TH2848-02	TH2848-05	TH2848-10
Display	Monitor	10.1-inch (diagonal) capacitive touch screen		
	Scale	16:9		
	Resolution	1280×RGB×800		
Measured Parameters	Methods	Four parameters can be selected arbitrarily		
	AC	Cp,Cs,Lp,Ls,Rp,Rs, Z , Y ,R,X,G,B,θ,D,Q,V <sub>AC</sub> ,I <sub>AC</sub> ,		
	DC	R <sub>DC</sub>		
	Piezoelectricity	Ct,Dt,Fs,Fp,Fp-Fs,Zmin,Zmax,F1,F2,F2-F1,Gmax,C0,C1,R1,L,Kp,Keff,Kt,K31,K33,Qm,ε,εr		
	Dielectric	Cp,D,ε, ε ,ε',ε'',tanδ,Q		

# Component & Device Parameter Test Instruments

## I. TH2848 Series Impedance Analyzer

Test Frequency	Range	4Hz-2MHz		4Hz-2MHz	4Hz-5MHz	4Hz-10MHz			
	Accuracy	0.01%							
	Resolution	0.1mHz	4.0000Hz-99.9999Hz						
		1mHz	100.000Hz-999.999Hz						
		10mHz	1.00000kHz-9.99999kHz						
		100mHz	10.0000kHz-99.9999kHz						
		1Hz	100.000kHz-999.999kHz						
		10Hz	1.00000MHz-9.99999MHz						
AC Test Signal Mode	Rating Value (ALC OFF)	The set voltage is the Hcurr voltage when the test terminal is open-circuit The set current is the current from Hcurr when the test terminal is short-circuited.							
	Constant Value(ALC ON)	Keep the voltage on the DUT the same as the set value Keep the current on the DUT the same as the set value							
		Voltage Range	0mVrms-20Vrms	F≤1MHz					
Test Level			0mVrms-15Vrms	1MHz<F≤2MHz					
			0mVrms-2Vrms	2MHz<F≤5MHz					
			0mVrms-1Vrms	5MHz<F≤10MHz					
Resolution		± (10%×set value+2mV) (AC≤2Vrms) ± (10%×set value+5mV) (AC > 2Vrms)							
		0.1mVrms	0mVrms-0.2Vrms						
		0.2mVrms	0.2Vrms-0.5Vrms						
		0.5mVrms	0.5Vrms-1Vrms						
		1mVrms	1Vrms-10Vrms						
Current Range	10mVrms	10Vrms-20Vrms							
	0mArms-20mArms		0mArms-100mArms						
	Resolution (100Ω Internal Resistance)	1μArms	0Arms-2mArms						
		2μArms	2mArms-5mArms						
		5μArms	5mArms-10mArms						
		10μArms	10mArms-100mArms						
R <sub>DC</sub> Test	Voltage Range	100mV-1V							
	Resolution	100μV							
	Current Range	0mA-10mA							
	Resolution	10μA							
DC Bias	Voltage Range	0V-±10V				0V-±40V			
	Accuracy	1%×set voltage+5mV AC≤2V							
		2%×set voltage+8mV AC>2V							
	Resolution	0.1mV	0V - ±5V						
		1mV	±5V - ±40V						
	Current Range	0mA - ±100mA							
	Resolution	1μA	0mA-50mA						
		10μA	50mA-100mA						
Voltage Source	Voltage Range	-10V - 10V							
	Resolution	1mV							
	Current Range	-45mA - +45mA							
	Output Impedance	100Ω							
Cylinder Control	Switching control								
	Turn on	Turns on within the set time from 0-60s							
	Turn off	Turns off within the set time from 0-60s							

# Component & Device Parameter Test Instruments

## I. TH2848 Series Impedance Analyzer

Test Side Configuration	Four-terminal pair
Test Cable Length	0m,1m
Output Impedance	100Ω, ±1%@1kHz
Mathematical Operation	Absolute deviation $\Delta$ from nominal value, percentage deviation $\Delta\%$ from nominal value
Equivalence Mode	Series, parallel
Calibration Function	OPEN,SHORT,LOAD
Measured Average	1-255 times
Range Selection	AUTO,HOLD
Trigger Mode	Continuous, single
Trigger Delay	0-60s
Specific Function	One-click screenshot, one-click record, embedded help system
Range Configurat	LCR R <sub>DC</sub> 100mΩ,1Ω,10Ω,20Ω,50Ω,100Ω,200Ω,500Ω,1kΩ,2kΩ,5kΩ,10kΩ,20kΩ,50kΩ,100kΩ 10Ω,20Ω,50Ω,100Ω,200Ω,500Ω,1kΩ,2kΩ,5kΩ,10kΩ,20kΩ,50kΩ,100kΩ
Measuring Time (ms/time) {Frequency ≥ 100kHz}	Fast: 2.5ms Medium: 90ms Slow: 220ms
Maximum Accuracy	0.05% (refer to specifications)
Measurement Display Range	a 1×10 <sup>-18</sup> ; E 1×10 <sup>18</sup>
C <sub>s</sub> ,C <sub>p</sub>	0.00001pF - 9.9999F
L <sub>s</sub> ,L <sub>p</sub>	0.00001μH - 99.9999kH
D	0.00001 - 9.99999
Q	0.00001 - 99999.9
R,R <sub>s</sub> ,R <sub>p</sub> ,X,Z,R <sub>DC</sub>	0.001mΩ - 99.9999MΩ
G,B,Y	0.00001μs - 99.9999S
V <sub>DC</sub>	±0V - ±999.9999V
I <sub>DC</sub>	±0A - ±999.9999A
θ <sub>r</sub>	-3.14159 - 3.14159
θ <sub>d</sub>	-179.999° - 179.999°
Δ%	± (0.000% - 999.9%)
Multifunction Parameter list Scanning	Points 201 points, average can be set for each point, each point can be sorted individually
	Parameters Test frequency, AC voltage, AC current, DC BIAS voltage, DC BIAS current, with dielectric constant test function based on the parameter of each point in this list
	Trigger Mode Sequential SEQ: When triggered once, measurements are taken at all scan points, /EOM/INDEX is output only once Step STEP: performs one scan point measurement per trigger, outputs /EOM/INDEX for each point, but list scan comparator result is only output at the last /EOM
	Other Features 1. Multiple copy functions for both scanning and test parameters 2. Time delay can be set for each scanning point
	Dielectric Constant Dielectric Material Testing Solutions
	Comparator Each scanning point can measure up to four test parameters, each parameter can be set upper and lower limits, all test parameters are qualified to output PASS signal, otherwise output FAIL signal, no judgment if no upper and lower limits are set.

# Component & Device Parameter Test Instruments

## I. TH2848 Series Impedance Analyzer

Graphic Scanning	Scanning Points	Points 51, 101, 201, 401, 801 are optional			
	Results Display	Extreme values for each parameter and the scanned parameter value at the point where the cursor is located with the corresponding test parameter value			
	Piezoelectric Testing	Piezoelectric device and piezoelectric material testing solutions, integrated piezoelectric admittance circle function			
	Scanning Track	1-4 test parameters can be selected arbitrarily, and the scanning curve can be divided into one screen, two screens and four screens.			
	Display Range	Real-time automatic, locked			
	Coordinate Scale	Logarithmic, linear			
	Scanning Parameters	Frequency, AC Voltage, AC Current, DCV BIAS/DCI BIAS			
	Trigger Method	<table border="1"> <tr> <td>Single</td><td>Trigger manually once, one scan from start to finish is completed, the next trigger signal starts a new scan</td></tr> <tr> <td>Sequential</td><td>Infinite loop scanning from start to finish</td></tr> </table>	Single	Trigger manually once, one scan from start to finish is completed, the next trigger signal starts a new scan	Sequential
Single	Trigger manually once, one scan from start to finish is completed, the next trigger signal starts a new scan				
Sequential	Infinite loop scanning from start to finish				
Results Saving	Graphics, documentation				
comparator	Bin Staging	10Bin,PASS,FAIL			
	Bin Deviation Setting	Deviation value, Percent deviation value, Off			
	Bin Mode	Tolerance, Continuous			
	Bin Count	0-99999			
	BIN Judgement	Up to four parameters can be set for the limit range. If the results of the four test parameters fall within the set range, the corresponding BIN number is displayed. If it exceeds the maximum BIN number range set, it displays FAIL. Test parameters without upper and lower limits set will be automatically ignored for BIN judgement.			
	PASS/FAIL Indication	If it meets Bin1-10 criteria, the PASS light on the front panel lights up; otherwise, the FAIL light is illuminated.			
	Data Cache	201 measurement results can be batch-read.			
store call	Internal	The instrument has 8GB of built-in storage space, after removing the system occupancy, the user can use about 6GB of space.			
	External USB	Test setup files, screenshot graphics, record files			
Keyboard Lock		Lockable front panel keys			
Interfaces	USB HOST	2 USB HOST ports, can be connected to the mouse, keyboard, U disk can only be used one at a time			
	USB DEVICE	Universal Serial Bus socket, small Class B (4 contact positions); compliant with USB TMC-USB 488 and USB2.0, female connector is used to connect an external controller.			
	LAN	10/100M Ethernet, 8-pin, two speeds adaptive			
	HANDLER	For Bin Staging Signal Output			
	GPIB	Standard			
	RS232C	Standard 9-pin, Crossed			
	RS485	Standard			
Power-on warm-up time		60 minutes.			
Input Voltage		100-120VAC/198-242VAC selectable, 47-63Hz			
Power Supply Power		Not less than 130VA			
Dimensions (WxHxD) mm		430x177x265			
Weights		11kg			

# Component & Device Parameter Test Instruments

## I. TH2840 Series Precision LCR Meter



### Features

- The test speed is as high as 1800 times/s (>10kHz), without relay action time
- Test level up to 20Vrms
- The bias voltage is built-in ±40V/±100mA/2A
- Industry-friendly user experience: Linux bottom layer, built-in help file
- 10.1 inch 1280×800 capacitive touch screen
- Approximately 100M setting file storage space in the machine, and massive U disk setting file storage capacity
- Provide host computer to support early model file format conversion to ensure compatibility



RS232	USB HOST	USB DEVICE	HANDER	LAN	EXTERNAL DCI
standard	standard	standard	standard	standard	standard

Dimension: 430mm(W)×177mm(H)×265mm(D)

Weight: 11kg

### Applications

#### Passive component:

Impedance parameter estimation and performance analysis of capacitor, inductor, magnetic core, resistor, piezoelectric devices, transformers, chip components and network components

#### Semiconductor component

Parasitic parameter test and analysis of LED driver integrated circuit  
C-VDC features of varactors

Parasitic parameter analysis of transistors or integrated circuit

#### Other components

Impedance assessment of printed circuit boards, relays, switches, cables, batteries

#### Dielectric material

Dielectric constant and loss angle evaluation of plastics, ceramics and other materials

#### Magnetic materials

Magnetic permeability and loss angle assessment of ferrite, amorphous body and other magnetic materials

#### Semiconductor materials

Dielectric constant, electrical conductivity and C-V characteristics of semiconductor materials

#### Liquid crystal cell

Dielectric constant, elastic constant and C-V characteristics of liquid crystal cell

### Specifications

Model	TH2840A	TH2840B
Display	Display	10.1" Touch Screen
	Ratio	16:9
	Resolution	1280×RGB×800
Parameter	Test Mode	Four Parameter Selectable
	AC	C <sub>p</sub> /C <sub>s</sub> , L <sub>p</sub> /L <sub>s</sub> , R <sub>p</sub> /R <sub>s</sub> ,  Z ,  Y , R, X, G, B, θ, D, Q, V <sub>AC</sub> , I <sub>AC</sub>
	DC	R <sub>DC</sub> , V <sub>DC</sub> , I <sub>DC</sub>
Frequency	Range	20Hz-500kHz
	Accuracy	0.01%
	Resolution	0.1mHz (20.0000Hz-99.9999Hz)
		1mHz (100.000Hz-999.999Hz)
		10mHz (1.00000kHz-9.99999kHz)
		100mHz (10.0000kHz-99.9999kHz)
		1Hz (100.000kHz-999.999kHz)
		10Hz (1.00000MHz-2.00000MHz)
AC test signal mode	Rated value (ALC OFF)	Set the voltage as the Hcur voltage when the test terminal is open Set the current to be the current flowing from Hcur when the test terminal is short-circuited
	Constant value (ALC ON)	Keep the voltage on the DUT the same as the set value Keep the current on the DUT the same as the set value

# Component & Device Parameter Test Instruments

## I. TH2840 Series Precision LCR Meter

Test Level	AC Voltage	5mVrms-20Vrms	F≤1MHz 5mVrms-20Vrms F > 1MHz 5mVrms-15Vrms
	Accuracy	± (10%×Set Value+2mV) (AC less than 2Vrms) ± (10%×Set Value+5mV) (AC > 2Vrms)	
	Resolution	1mVrms (5mVrms-0.2Vrms)	
		1mVrms (0.2Vrms-0.5Vrms)	
		1mVrms (0.5Vrms-1Vrms)	
		10mVrms (1Vrms-2Vrms)	
		10mVrms (2Vrms-5Vrms)	
	AC Current	50μArms-100mArms	
	Resolution(100Ω Internal Resistance)	10μArms (50μArms-2mArms)	
		10μArms (2mArms-5mArms)	
		10μArms (5mArms-10mArms)	
		100μArms (10mArms-20mArms)	
		100μArms (20mArms-50mArms)	
		100μArms (50mArms-100mArms)	
R <sub>DC</sub> Test	Voltage	100mV-20V	
	Resolution	1mV (0V-1V) 10mV (1V-20V)	
	Current	0mA-100mA	
	Resolution	10μA (0mA-10mA) 100μA (10mA-100mA)	
DC Bias	Voltage	0V-±40V	
	Accuracy	AC≤2V 1%× Set Value+5mV AC>2V 2%×Set Value+8mV	
	Resolution	1mV (0V-1V) 10mV (±1V- ±40V)	
	Current	0mA-±100mA	
	Resolution	10μA (0mA-10mA) 100μA (10mA-100mA)	
Built-in current source	Current	0mA-2A	
	Accuracy	I>5mA ± (2%×Set Value+2mA)	
	Resolution	1mA	
Test terminal configuration		Four Terminal Pair	
Test cable length		0m	
Output impedance		30Ω, ±4%@1kHz 100Ω, ±2%@1kHz	
computation		The absolute deviation from the nominal value $\Delta$ , the percentage deviation from the nominal value $\Delta\%$	
Equivalent way		Series, Parallel	
Calibration function		OPEN, SHORT, LOAD	
Measurement average		1-255	
Range selection		AUTO, HOLD	
Range configuration	LCR	100mΩ, 1Ω, 10Ω, 20Ω, 50Ω, 100Ω, 200Ω, 500Ω, 1kΩ, 2kΩ, 5kΩ, 10kΩ, 20kΩ, 50kΩ, 100kΩ	
	R <sub>DC</sub>	1Ω, 10Ω, 20Ω, 50Ω, 100Ω, 200Ω, 500Ω, 1kΩ, 2kΩ, 5kΩ, 10kΩ, 20kΩ, 50kΩ, 100kΩ	
Measuring time (ms)		Fast+: 0.56ms (1800 times/s) Fast: 3.3ms Middle: 90ms Slow: 220ms	
Highest accuracy		0.05% (refer to the instruction manual for details)	
Measurement display range			
C <sub>s</sub> , C <sub>p</sub>		0.00001pF-9.99999F	
L <sub>s</sub> , L <sub>p</sub>		0.00001μH-99.9999kH	
D		0.00001-9.99999	
Q		0.00001-99999.9	
R, R <sub>s</sub> , R <sub>p</sub> , X, Z, R <sub>DC</sub>		0.001mΩ-99.9999MΩ	

# Component & Device Parameter Test Instruments

## I. TH2840 Series Precision LCR Meter

G, B, Y	0.00001μs-99.9999S	
V <sub>DC</sub>	±0V-±999.999V	
I <sub>DC</sub>	±0A-±999.999A	
θ <sub>r</sub>	-3.14159-3.14159	
θ <sub>d</sub>	-179.999°-179.999°	
Δ%	± (0.000%-999.9%)	
Multi-function parameter list scan	Dots Number	201 points, average times can be set for each point, and each point can be sorted separately
	Parameter	Test frequency, AC voltage, AC current, DC BIAS voltage, DC BIAS current (100mA), DC BIAS current (2A)
	Trigger mode	Sequence SEQ: After a trigger, measure at all sweep points, and /EOM/INDEX will output only once Step STEP: Perform a sweep point measurement each time it is triggered, and each point outputs /EOM/INDEX, but the list sweep comparator result is only output at the last /EOM
	Other features	1.Scan parameters and test parameters have multiple copy functions 2.Delay can be set for each scan point
	Comparators	Each sweep point can measure up to four test parameters, each parameter can set upper and lower limits, all test parameters are qualified, output PASS signal, otherwise output FAIL signal, no upper and lower limits are set, no judgment
Graphic scan	Scan points	51, 101, 201, 401, 801 Optional
	The results	The extreme value of each parameter and the sweep parameter value at the point where the cursor is located and the corresponding test parameter value
	Scan trajectory	1-4 test parameters can be selected arbitrarily, the scanning curve can be divided into one screen, two screens, or four screens
	Display range	Real-time automatic, locked
	Coordinate ruler	Logarithmic, linear
	Scan parameters	Frequency, AC voltage, AC current, DCV BIAS / DCI BIAS (100mA) / DCI BIAS (2A)
	Trigger mode	Manually trigger once, and complete a scan from the start point to the end point, and the next trigger signal starts a new scan
Comparators	continuous	Infinite loop scanning from start to end
	Results save	Graphics, files
	Bin	10Bin, PASS, FAIL
	Bin deviation setting	Deviation value, percentage deviation value, off
	Bin mode	Tolerance, continuous
	Bin count	0-99999
	Discrimination	Up to four parameter limit ranges can be set for each file. The corresponding file number is displayed within the setting range of the four test parameter results. If the maximum file number range is exceeded, FAIL is displayed. The test parameters without the upper and lower limits are automatically ignored.
Data cache	PASS/FAIL indication	Meet Bin1-10, the PASS light on the front panel is on, otherwise the FAIL light
Store call		201 measurement results can be read in batches
Inside	Inside	About 100M non-volatile memory test setting file
	External USB	Test setting file, screenshot graph, record file
Keyboard lock		The front panel keys can be locked, other functions to be expanded
Interface	USB HOST	2 USB HOST ports, can connect mouse and keyboard at the same time, only one U disk can be used at the same time
	USB DEVICE	Universal serial bus socket, small type B (4 contact positions); compatible with USB TMC-USB488 and USB2.0, the female connector is used to connect an external controller.
	LAN	10/100M Ethernet adaptive
	HANDLER	Used for Bin signal output
	External DC BIAS control	Support TH1778A
	RS232C	Standard 9-pin, cross
	RS485	Can accept modification or external RS232 to RS485 module
Power-on warm-up time		60 Minutes
Input voltage		100-120VAC/198-242VAC Option, 47-63Hz
Power consumption		More than 130VA
Size (WxHxD) mm <sup>3</sup>		430x177x265
Weight (kg)		11kg

# Component & Device Parameter Test Instruments

## I. TH2836 Series Precision LCR Meter

CE

### Features

- High precision: using automatic balancing bridge technology, four-terminal pair test configuration
- High speed: the fastest test speed is 5.6ms
- High resolution: 7 inches, 800×480 resolution
- 10-point multi-parameter list sweep function
- Mathematical operation function
- Automatic polarity function of varactor diode
- One-key screenshot function
- One key recording function
- 10-level sorting function, sound and light alarm for sorting results
- Large storage space:  
Built-in: 40 sets of setting files  
Expansion: 500 sets of setting files, image files, and data recording files can be stored through USB memory
- High compatibility: support SCPI commands, compatible with KEYSIGHT E4980A, E4980AL, HP4284A



RS232	USB HOST	USB DEVICE	HANDER	LAN	GPIB
standard	standard	standard	standard	standard	option

### TH2836 Series

Dimension (mm): 400(W) x 132(H) x 425(D)  
Net weight : 15kg

### Application

- Passive components:  
Capacitors, Inductors, Magnetic Cores, Resistors, Piezoelectric Devices, Transformers, Chipsets  
Impedance parameter evaluation and performance analysis of hardware and network components, etc.
- Semiconductor components:  
Test and analysis of parasitic parameters of LED drive integrated circuits; C-V DC characteristics of varactor diodes; analysis of parasitic parameters of transistors or integrated circuits
- Other components:  
Impedance evaluation of printed circuit boards, relays, switches, cables, batteries, etc.

- Dielectric material:  
Dielectric constant and loss angle evaluation of plastics, ceramics and other materials
- Magnetic material:  
Permeability and loss angle evaluation of ferrite, amorphous and other magnetic materials
- Semiconductor materials:  
Dielectric constant, conductivity and C-V characteristics of semiconductor materials
- LCD unit:  
C-V characteristics such as dielectric constant and elastic constant

### Specifications

Model	TH2836	
Display	7 inch TFT LCD Display 800×RGB×480	
AC Parameters	Cp/Cs,Lp/Ls,Rp/Rs, Z , Y ,R,X,G,B,θ,D,Q,Vac,Iac	
DC Parameters	Rdc,Vdc,Idc	
Test Frequency	Range	4Hz-8.5MHz
	Resolution	1mHz
Test Electric Level	AC Voltage	4Hz-1MHz: 5mV-2Vrms 1MHz-8.5MHz: 5mV-1Vrms
	Resolution	100μV
	AC Current	4Hz-2MHz: 50μA-20mA rms 2MHz-8.5MHz: 50μA-10mA rms
	Resolution	1μA
	DC Voltage	100mV-2V
	Resolution	100μV

# Component & Device Parameter Test Instruments

## I. TH2836 Series Precision LCR Meter

DC Bias	Voltage	0V-±10V
	Resolution	100µV
	Current	0mA-±100mA
	Resolution	1µA
Test terminal configuration		Four-terminal pair
Cable Length		0,1m
Output Impedance		100Ω
Typical Measurement Time (speed)		Fast: 5.6ms Medium: 120ms Slow: 230ms
Highest accuracy		1kHz : 0.05% 1MHz: 0.05% 2MHz: 0.1% 5MHz: 0.5% 8.5MHz: 1.0%
Display Range		a: $1 \times 10^{-18}$ ; E: $1 \times 10^{18}$
Cs,Cp		±1.00000aF-999.999EF
Ls,Lp		±1.000000aH-999.999EH
D		±0.00001-9.99999
Q		±0.01-99999.9
R,Rs,Rp,X,Z,Rdc		±1.00000aΩ-999.999EΩ
G,B,Y		±1.00000aS-99.9999ES
Vdc		±1.000000aV-999.9999EV
Idc		±1.00000aA-999.999EA
θr		±1.00000rad-3.14159rad
θd		±0.0001deg-180.000deg
Δ%		±0.0001%-999.999%
Multifunction List Scan		10 dots. Parameter: Measurement parameter, test frequency, AcVoltage, AC current, DC Bias voltage and DC Bias current.
Graph sweep		Optional
Interface		USB HOST,USB DEVICE,HANDLER,RS232C Optional: GPIB
Warm-up time		60 minutes
Input voltage		100-120VAC/198-242VAC, 47-63Hz
Power consumption		80VA
Dimension (WxHxD) mm <sup>3</sup>		400x132x425
Weight		15kg

# Component & Device Parameter Test Instruments

## I. TH283X Series Compact LCR Meter

### Features

- Low cost, high performance, small size
- 4.3 inch TFT LCD Display
- Soft power switch
- Selectable Chinese-English operation language
- Max. 200kHz test frequency
- Max. 6 digit reading resolution
- 10mVrms-2.0Vrms programmable signal level, built-in 0 - ± 5V/50mA bias source
- DCR, 50mV-2V programmable test level, resolution 10 $\mu$ Ω
- Ls-Rd / Lp-Rd Function (L, Rd display simultaneously) \*
- Highest test speed 13ms/time
- Selectable 30Ω/100Ω signal source impedance
- V/I monitor and auto level adjustment function
- Built-in comparator, 10 bins sorting and count function
- File storage and firmware update through U disk
- RS232, RS485, USB, HANDLER, GPIB interface

\* Rd means DCR.



RS232	USB HOST	USB DEVICE	HANDER
standard	standard	standard	standard
GPIB	RS485	SCANNER	
option	option	option	

### TH283X Series

Rack mount (mm): 215(W) x 88(H) x 335(D)

Dimension (mm): 235(W) x 105(H) x360(D)

Net weight: 3.6 kg

### ■ Other components:

Impedance evaluation of printed circuit boards, relays, switches, cables, batteries, etc.

### Applications

#### ■ Passive components:

Evaluation of Impedance Parameters for Capacitors, Inductors, Cores, Resistors, piezoelectric devices, Transformers, Chip Components, and Network Components

### Specifications

Model	TH2830	TH2832
Basic measurement accuracy (See details in technical specification)	0.05% 0.1% Calibration condition Warm up time: ≥ 30 minutes ; Environment temperature: 23±5°C Signal level: 1Vrms ; Corretion: after OPEN, SHORT Testing cable length: 0 m	0.05%
Test signal frequency	50Hz-100kHz , Continuous	20Hz-200kHz, Continuous
Signal source output impedance	Selectable 30Ω, 100Ω, ±1% @1kHz	
AC test signal level	Normal 10mV—2Vrms Resolution: 10mV, Accuracy: 10% x setting voltage+2mV 100 $\mu$ A—20mA Resolution: 0.1mA Constant level (ALC ON) ----- ----- ----- ----- 20mV—1Vrms Resolution: 10mV , Accuracy: 10% 200 $\mu$ A—10mA Resolution: 0.1mA	
DCR test signal level	1V DC ----- 5mV—2V DC Resolution: 0.5mV	

# Component & Device Parameter Test Instruments

## I. TH283X Series Compact LCR Meter

DC bias voltage source	-----	0V—± 5V
	-----	Resolution: 0.5mV, Accuracy: 1%
	-----	0mA—± 50mA
	-----	Resolution: 0.5μA
Test parameters	Z ,  Y , C, L, X, B, R, G, D, Q, θ, DCR	
DCR display range	0.00001 Ω – 99.9999 MΩ	
LCR parameters display range	Z , R, X 0.00001Ω — 99.9999MΩ  Y , G, B 0.00001μs — 99.9999s C 0.00001pF — 9.99999F L 0.00001μH — 99.9999kH D 0.00001 — 9.9999 Q 0.00001 — 99999.9 θ(DEG) -179.999° — 179.999° θ(RAD) -3.14159 — 3.14159 Δ% -999.999% — 999.999%	
Display digits	6	6
Measurement time (≥10 kHz)	Fast: 75 meas/sec(13ms), Medium:11 meas/sec(90 ms), Slow: 2.7meas/sec(370 ms)	
Equivalent circuit	Serial, Parallel	
Range mode	Auto, Hold	
Trigger mode	Internal, Manual, External, Bus	
Average time	1—255	
Correction	Open, Short, Load	
Math operation	Direct reading, ΔABS, Δ%	
Trigger delay time setting	0 - 60.000s, 1ms steps	
Step delay time setting	0 - 60.000s, 1ms steps	
List Sweep	·10 points list sweep ·Frequency, AC voltage/current, internal/ external bias voltage/ current can be swept. ·Each sweep point can be sorted separately.	
Comparator function	10 bins, BIN1—BIN9, NG, AUX Bin count function PASS, FAIL LED display on front panel	
Built-in Storage	Internal 100 LCRZ instrument setting files, 201 times test results	
USB Storage	Instrument setting files , measurement result CSV files, printed screen (GIF format)	
Interface	Control interface	HANDLER
	Communication interface	USB HOST, RS232C, RS485(option), GPIB(option)
	Storage interface	USB DEVICE (U-disk storage)

# Component & Device Parameter Test Instruments

## I. TH2810B+ LCR Meter

### Features

- 100Hz,120Hz,1kHz,10kHz 4 typical test frequencies
- 4.3 inch TFT liquid crystal display, Chinese and English optional operation interface
- 6-digit reading resolution
- Maximum test speed:12.5ms, support low frequency and high speed:TX4+3ms
- 10 bins sorting, test sorting is more perfect
- 100 sets of LCRZ instrument setting files, 10 measurements
- Soft power switch
- Support 110V/220V two power supply voltages
- 10-point list sweep, support multi-frequency test sorting
- Ultra-low signal source output offset (<100 $\mu$ V), meeting the needs of large inductor, common mode choke inductor test
- Super impact protection
- Power on state lock button;
- Empty fixture judgment
- Data logging function
- Screen capture function
- Interface function, timing, trigger delay, etc. are more complete



RS232/RS485(option)	HANDER	USB HOST	USB DEVICE
standard	standard	standard	standard

### TH2810B+(TH2810B Upgraded)

Support SCPI,MODBUS protocol  
Rack mount (mm): 215(W) x 88(H) x 335(D)  
Dimension (mm): 235(W) x 105(H) x360(D)  
Weight: 3.6kg

### Applications

- Passive components:  
Evaluation of Impedance Parameters for Capacitors, Inductors, Cores, Resistors, piezoelectric devices, Transformers, Chip Components, and Network Components
- Other components:  
Impedance evaluation of printed circuit boards, relays, switches, cables, batteries, etc.

### Specifications

Model	TH2810B+
Basic accuracy	0.1%
Test frequency	100Hz,120Hz,1kHz,10kHz
Test parameters	L, C, R,  Z , D, Q, X, $\theta_d$ , $\theta_r$ , V <sub>m</sub> , I <sub>m</sub> , $\Delta\%$
V/I monitor	Yes
AC test signal level	0.1Vrms,0.3Vrms,1Vrms
Signal source internal resistance	10 $\Omega$ , 100 $\Omega$
Test terminal configuration	5-terminal
Test speed (ms/time)	Fast: 19ms; Medium:83ms; Slow: 333ms F≤120Hz Fast :4XT+3ms
Zero clearing	Open, Short, Load
List sweep	·10-point list sweep ·Each scan point can be individually sorted, support multi-frequency combined test sorting ·Scanning test for frequency and AC voltage
Equivalent Circuit	Series, Parallel
Range mode	AUTO, HOLD
Trigger mode	Internal, External, Manual, Bus
Average times	1-255
Arithmetical operation	Direct reading, $\Delta$ ABS, $\Delta\%$
Delay	Trigger delay, step delay: 0—60.000s, 1ms step
General function	Series, parallel equivalent mode, calibration: open circuit, short circuit, range selection: automatic, manual, trigger mode: INT, MAN, EXT, BUS, keyboard lock function
Comparator	10 bins sorting,BIN1-BIN9,NG,AUX; Bin count function PASS, FALL front panel LED display
Nonvolatile storage	100 sets of LCRZ instrument setting files, 10 test results
External USB storage	Instrument setting file, CSV data file

# Component & Device Parameter Test Instruments

## I. TH2822 Series Handheld LCR Meter

### Features

- Max. Basic accuracy: 0.25%
- Maximum test signal frequency : 100kHz
- Selectable test signal level
- With DCR function
- Enhanced protection capability of input terminal impact
- 40000 counts for primary parameter, D/Q resolution 0.0001
- Typical ultra-low consumption: 25mA
- Innovatively compatible terminal configuration: 5-terminal test slot and 3-terminal rubber jack
- Intellectualized auto LCR function
- AC test speed up to 4 meas/sec (DCR: 3 meas/sec), fast automatic range switch design
- Constant 100Ω output impedance
- Percentage display and 4-tolerance comparator: 1/5/10/20%
- Battery charge in startup & shutdown
- Test terminal protection function
- Data-hold, Max./Min./Average value recording
- Real-time function configuration selection and working condition hold capacity
- Standard configuration Mini – USB communication interface and SCPI command set
- Free FastAccess PC communication software on our website
- Gorgeous dual-color cast shell



Mini USB  
standard

### TH2822 series

Dimension (mm): 90(W) x 190(H) x40(D)  
Weight: 0.35kg

### Applications

- Passive components:  
Evaluation of Impedance Parameters for Capacitors, Inductors, Cores, Resistors, piezoelectric devices, Transformers, Chip Components, and Network Components
- Other components:  
Impedance evaluation of printed circuit boards, relays, switches, cables, batteries, etc.

### Brief Introduction

■ With its advanced impedance test technology, Tonghui has launched TH2822 series handheld LCR meters. This series currently possess the most powerful functions and outstanding performance in this industry comparable with bench LCR meters. Meanwhile it is the achievement of Tonghui after years of efforts and research in the passive-component testing field.

TH2822 series apply the ultra-low power consumption design and high density SMD assembly techniques and can simultaneously display primary and secondary parameters on a LCD display with backlight. The dual-color shell is gorgeously once shaped; and functions are easy to operate. The test frequency is up to 100 kHz, the readings of primary parameter 40,000 counts and the resolution of dissipation factor 0.0,001. Accurate and convenient measurements of passive-components can be achieved in different occasions for a long time. In order to meet different market demand, multiple signal level and DCR test function are increased on TH2822D/E. The test accuracy can reach 0.1%. With USB interface, TH2822 series can conveniently communicate with a PC and be remotely controlled by a PC. In order to satisfy the increasing test requirements for SMD and balance the different needs for performance and price, two types of 4-terminal Kelvin test tweezers: TH26009C and TH26029C are optional for users' choice.

# Component & Device Parameter Test Instruments

## I. TH2822 Series Handheld LCR Meter

### Specifications

Model	TH2822D	TH2822E
Function		
Test Parameter	Primary parameters: L / C / R / Z / DCR Secondary parameters: D / Q / R /θ/ ESR	
Equivalent Circuit	Series and Parallel	
Parameter and Equivalent Mode	Hold, Auto	
Ranging Mode	Auto	
Measurement Terminals	3-terminal, 5-terminal	
Measuring Speed	4meas/sec, 1.5meas/sec	
DCR Measuring Speed	3meas/sec	
Calibration Function	Open, short	
Comparator Function	1%, 5%, 10%, 20%	
Input fuse	0.1A / 250V	
Interface	Mini-USB (virtual serial port)	
Test signal		
Test Frequency	100Hz, 120Hz, 1kHz, 10kHz,	100Hz, 120Hz, 1kHz, 10kHz, 100kHz
Test Level	0.3 Vrms, 0.6 Vrms, 1 Vrms	
Output Resistance	100Ω	
Display		
Display	LCD Primary-Secondary dual display, with backlight (TH2822 not available)	
Reading	Max. Primary parameters: 40,000 digits, secondary parameters D/Q Minimum resolution: 0.0001	
Basic accuracy	0.1%	
Measuring Range		
L	0.00μH - 1000.0H	0.000μH - 1000.0H
C	0.00pF - 20.000mF	0.000pF - 20.000mF
Z/R	0.0000Ω- 10.000MΩ	
DCR	0.0000Ω- 20.000MΩ	
ESR	0.0000Ω- 999.9Ω	
D	0.0000 - 9.999	
Q	0.0000 - 9999	
θ	0.00°- ±180.0°	
Power Requirements		
Battery model	TH2822 / A : IEC 6LR61, 9V alkaline battery TH2822C/D/E : LH-200H7C,8.4V Ni-MH 200mAH rechargeable battery	
AC power adapter	Input: 220V/50Hz, Output: 12V-15V(100Ω Load)	
Standby Current	11μA	
Battery life	16 hours (typical) , new alkaline battery, with backlight off	
Auto power off	5min, 15min, 30min, 60min, OFF available; Factory Default : 5min	
Low voltage indicator	When battery voltage drops below 6.8V, low voltage indicator turns on.	

# Component & Device Parameter Test Instruments

## I. TH2840X Series Automatic Transformer Test System



### Features

- The test speed is as high as 1000 times/s (>10kHz), without relay action time
- Test level up to 20Vrms
- The bias voltage is built-in  $\pm 40V/\pm 100mA/2A$
- Up to 288 test pins (only TH2840NX)
- Industry-friendly user experience: Linux bottom layer, built-in help file
- 10.1 inch 1280×800 capacitive touch screen
- Graphical pin association setting page, so that wiring is no longer a problem
- Lk setting does not need to input the leakage inductance pin, which is more intuitive
- Enhanced balance scanning function, from 5 points to 10 points
- Range switching adopts electronic switch, fast speed, long life, no noise
- Optional LCR function
- Approximately 100M setting file storage space in the machine, and massive U disk setting file storage capacity
- Provide host computer to support early model file format conversion to ensure compatibility



TH2840X Series



TH1901B

RS232	standard	LAN	standard	HANDER	standard	USB HOST	standard	USB DEVICE	standard	EXTERNAL DCI	standard
-------	----------	-----	----------	--------	----------	----------	----------	------------	----------	--------------	----------

Dimension: 430mm(W)x177mm(H)x265mm(D) 【TH2840AX/BX】

430mm(W)x177mm(H)x405mm(D) 【TH2840NX】

Weight: 11kg 【TH2840AX/BX】 /17kg 【TH2840NX】

### Applications

- Switching transformer scanning test, comprehensive characteristics analysis.
- Network transformer scanning test, comprehensive characteristics analysis
- Discrete passive components (L, R, C) multi-channel scanning test
- Relay drive line package, contact resistance multi-channel scanning test
- Multi-channel DC resistance DCR scanning test
- Comprehensive test analysis of multiple passive components in impedance network

### Specifications

Model	TH2840AX	TH2840BX	TH2840NX
Display	Display	10.1" Captive Touch Screen	
	Ratio	16:09	
	Resolution	1280×RGB×800	
Test PIN	20 PIN (By TH1806)		48 PIN (Can extend to 288PIN)
Frequency	Range	20Hz-500kHz	20Hz-2MHz
	Accuracy	0.01%	
	Resolution	0.1mHz (20.0000Hz-99.9999Hz)	
		1mHz (100.000Hz-999.999Hz)	
		10mHz (1.0000kHz-9.99999kHz)	
		100mHz (10.0000kHz-99.9999kHz)	
		1Hz (100.000kHz-999.999kHz)	
		10Hz (1.00000MHz-2.00000MHz)	
AC Test Signal Mode	Rated Value (ALC OFF)	Set the voltage as the Hcur voltage when the test terminal is open	Set the current to be the current flowing from Hcur when the test terminal is short-circuited
	Constant Value (ALC ON)	Keep the voltage on the DUT the same as the set value	Keep the current on the DUT the same as the set value

# Component & Device Parameter Test Instruments

## I. TH2840X Series Automatic Transformer Test System

Test Level	Ac Voltage	5mVrms-20Vrms	F<=1MHz 5mVrms-20Vrms F>1MHz 5mVrms-15Vrms	5mVrms-20Vrms
	Accuracy	$\pm (10\% \times \text{the set value} + 2\text{mV})$ (AC <= 2Vrms) $\pm (10\% \times \text{the set value} + 5\text{mV})$ (AC > 2Vrms)		
	Resolution	1mVrms (5mVrms-0.2Vrms) 1mVrms (0.2Vrms-0.5Vrms) 1mVrms (0.5Vrms-1Vrms) 10mVrms (1Vrms-2Vrms) 10mVrms (2Vrms-5Vrms) 10mVrms (5Vrms-10Vrms) 10mVrms (10Vrms-20Vrms)		
	AC Current	50 $\mu$ Arms-100mArms		
	Resolution (100 $\Omega$ Internal Resistance)	10 $\mu$ Arms (50 $\mu$ Arms-2mArms) 10 $\mu$ Arms (2mArms-5mArms) 10 $\mu$ Arms (5mArms-10mArms) 100 $\mu$ Arms (10mArms-20mArms) 100 $\mu$ Arms (20mArms-50mArms) 100 $\mu$ Arms (50mArms-100mArms)		
	Voltage	100mV-20V		
	Resolution	1mV (0V-1V) 10mV (1V-20V)		
	Current	0mA-100mA		
	Resolution	10 $\mu$ A (0mA-10mA) 100 $\mu$ A (10mA-100mA)		
RDC Test	Voltage	0V- $\pm$ 40V		
	Accuracy	AC <= 2V 1% $\times$ the set voltage + 5mV AC > 2V 2% $\times$ the set voltage + 8mV		
	Resolution	1mV (0V - $\pm$ 1V) 10mV ( $\pm$ 1V - $\pm$ 40V)		
	Current	0mA- $\pm$ 100mA		
	Resolution	10 $\mu$ A (0mA-10mA) 100 $\mu$ A (10mA- 100mA)		
Dc Bias *	Current	0mA-2A		
	Accuracy	$I > 5\text{mA} \pm (2\% \times \text{the set value} + 2\text{mA})$		
	Resolution	1mA		
	Output Impedance		30 $\Omega$ , $\pm 4\%$ @ 1kHz	
			100 $\Omega$ , $\pm 2\%$ @ 1kHz	
LCR Function				
Test Parameter	Method	Arbitrary selection of four parameters		
	AC	Cp/Cs, Lp/Ls, Rp/Rs,  Z ,  Y , R, X, G, B, $\theta$ , D, Q, VAC, IAC		
	DC	RDC, VDC, IDC		
Test Terminal Configuration		Four Terminal Pair		
Test Cable Length		0m		
Computation		The absolute deviation from the nominal value $\Delta$ , the percentage deviation from the nominal value $\Delta\%$		

# Component & Device Parameter Test Instruments

## I. TH2840X Series Automatic Transformer Test System

### Specifications

Equivalent Way		Series, Parallel	
Calibration Function		OPEN, SHORT, LOAD	
Average Times		1-255	
Range Selection		AUTO, HOLD	
Range Configuration	LCR	100mΩ, 1Ω, 10Ω, 20Ω, 50Ω, 100Ω, 200Ω, 500Ω, 1kΩ, 2kΩ, 5kΩ, 10kΩ, 20kΩ, 50kΩ, 100kΩ	
	RDC	1Ω, 10Ω, 20Ω, 50Ω, 100Ω, 200Ω, 500Ω, 1kΩ, 2kΩ, 5kΩ, 10kΩ, 20kΩ, 50kΩ, 100kΩ	
Test Speed (Ms)		Fast+: 1ms. Fast: 3.3ms. Middle: 90ms. Slow: 220ms	
Highest Accuracy		0.05% Please refer to the manuals for the details	
Measurement Display Range			
Cs, Cp		0.00001pF-9.99999F	
Ls, Lp		0.00001μH-99.9999kH	
D		0.00001-9.99999	
Q		0.00001-99999.9	
R, Rs, Rp, X, Z, Rdc		0.001mΩ-99.9999MΩ	
G, B, Y		0.00001μs-99.9999S	
Vdc		±0V-±999.999V	
Idc		±0A-±999.999A	
Θr		-6.28318	
Θd		-179.999° -179.999°	
Δ%		± (0.000%-999.9%)	
Turns Ratio		1: 0.001—1000: 1	
Transformer Test			
Test Parameter		Cs/Cp, Ls/Lp, DCR, Zx, Rs/Rp, D, Q, dZ, Lk, Phase, Balance Turns-Ratio, Ns: Np=U2/U1, Np: Ns=U1/U2 Turns: Ns=Np×U2/U1, Np=Ns×U1/U2	
Test Mode	Continuous	In the single trigger mode, manually trigger once, and once test all the test parameters.	
	Step	In the single trigger mode, manually trigger once to measure one parameter. Trigger again to measure the next parameter.	
Test Speed (Ms)	Fast+	Fast: 0.56ms(>10kHz)	
	Fast	Fast: 3.3ms	
	Middle	Middle: 90ms	
	Slow	Slow: 220ms	
Bias Resource		See *	
Average Times		Each test parameter can set different average times, the average times is 0-255	
Time Delay		Each test parameter can set a different delay time	
Transformer Scanning			
Built In Scanning Board		No	
		One Board as standard. Could extend to six boards. ((24×2) PIN per board)	
Transformer Handler	Pin Definition	NS1-NS30, GOOD, NG, TEST, TRIGGER, RESET	NS1-NS9, GOOD, NG, TEST, TRIGGER, RESET
	Output Characteristics	Optocoupler isolation, ULN2003 drive enhancement, collector output	
Model		Direct reading, percentage	

# Component & Device Parameter Test Instruments

## I. TH2840X Series Automatic Transformer Test System

Test Range		Auto, Hold
Bias Resource		See *
External Scanning Box		compatible to TH1901 series, TH1831 scanning box, TH1806 series
Number Of Windings	Primary	60
	Secondary	9
Average Times		Each test parameter can set different average times, the average times is 0-255
Time Delay		Each test parameter can set a different delay time
Test Speed (Ms)	Fast	Fast: 3.3ms(>=1kHz). Fast+: 1ms(>=10kHz) (Exclude the time for the relay action)
	Middle	Middle: 90ms
	Slow	Slow: 220ms
Test Lead Interface		25*2pin FRC socket
Other Functions and Specifications		
Storage	Internal	About 100M non-volatile memory test setting file
	U Disk	Test setting file, screenshot graph, record file
Keyboard Lock		The front panel keys can be locked
Interface	USB HOST	2 USB HOST ports. Mouse and keyboard could work at the same time. Only one U disk can be used at the same time.
	USB DEVICE	Universal serial bus socket, small type B (4 contact positions); compatible with USB TMC-USB488 and USB2.0, the female connector is used to connect an external controller.
	LAN	10/100M Ethernet adaptive, 8 Pin
	HANDLER	Used for Bin signal output
	External DC BIAS Control	Support TH1778A (do not support transformer scanning)
	RS232C	Standard 9-pin, cross
	RS485	Can accept modification or connect to RS232 to RS485 adaptor
Power-On Warm-Up Time		60 Minutes
Output Voltage		100-120VAC/198-242VAC Optional, 47-63Hz
Power Consumption		More than 130VA
Size (WxHxD) Mm		430mm(W)x177mm(H)x265mm(D)
Weight (Kg)		11kg
		430mm(W)x177mm(H)x405mm(D)
		17kg

# Component & Device Parameter Test Instruments

## I. TH2829X Series Automatic Transformer Test System



### Features

- 7-inch TFT LCD display with a resolution of 800×RGB×480
- Frequency up to 1MHz, resolution: 0.5mHz
- Signal level: 5mV-2Vrms, optional (2Vrms-10Vrms)
- Built-in 0-100mA/0-10V bias power supply, optional 1A/2A bias current source
- Up to 75 times / sec test speed
- Diode forward and reverse characteristic detection
- Improved high turns ratio and weakly coupled transformer test capability
- Improved DCR testing capabilities
- Single screen can accommodate all scan test results
- Time stamping system: memory file setting, calibration deviation and deduction time
- Sort the selected scanning parameters
- Self-test scanning fixture relays
- Flexible deviation deduction method
- Multiple handling ways for FAIL cases
- Single parameter test cycle to test independent windings
- Increased security: administrator and operator passwords
- Built-in statistical analysis capabilities: Cpk, Cp, Ck, etc.
- Bar-code reading function can be used to select a setting file or to manage the type of test products
- Optional PC-level instrument test setup file programming capability
- Online upgrade mode: USBHOST or RS232
- Support multiple instrument networking through LAN interface
- Backward compatible with TH2818X/TH2819X parameter setting file
- Storage: Internal: 100 groups of settings file to save  
U disk: 500 groups of configuration files, CSV format test data, GIF format images



TH2829X Series

GPIB  
option

RS485  
option

HANDER  
option

RS232  
standard

LAN  
standard

SCANNER  
standard

USB HOST  
standard

USB DEVICE  
standard



TH1901B

Dimension(mm): 400mm(W)×132mm(H)×385mm(D)

Weight: 13kg

### Applications

- Switching transformer scanning test, comprehensive characteristics analysis.
- Network transformer scanning test, comprehensive characteristics analysis
- Discrete passive components (L, R, C) multi-channel scanning test
- Relay drive line package, contact resistance multi-channel scanning test
- Multi-channel DC resistance DCR scanning test
- Comprehensive test analysis of multiple passive components in impedance network

### Specifications

Model	TH2829AX										TH2829CX			
Test Pin(PIN)	20										20			
Test frequency	20Hz — 200kHz										20Hz — 1MHz			
Display	800×RGB×480 7 inch TFT LCD display													
LCR Function	option													
Transformer test parameters	Turn Ratio	Turns	Phase	L	C	Lk	Q	ACR	DCR	Balance	Pin Short	Diode P/N		
LCR test parameters	Z ,  Y , C, L, X, B, R, G, D, Q, θ, DCR, Turn-Ratio, Phase, Lk													
Basic test accuracy	LCRZ	0.05%												
	DCR, Turn Ratio	0.1%												
Signal source output impedance	10Ω, 30Ω, 50Ω, 100Ω													
Test speed (ms/times)	13ms, 90 ms, 370 ms													
AC signal level	5mVrms — 2Vrms(transformer test, can be customized to 10Vrms), 5mVrms — 10Vrms(LCR function); 50μArms — 100mArms													
DC bias voltage source	-----	0V — ± 10V; 0mA — ± 100mA												
DC bias current source	0 — ±1A option(option TH2901) / 0 — ±2A option(option TH2902)													
DC constant current source	0mA — ±120mA for diode forward characteristic test													
Diode test	forward test voltage	0 — 9.9999 V												
	Reverse test current	0 — 99.999 mA												
Comparator	10 bins, PASS/FAIL indication, file counting function													
Storage	Internal: 100 sets of configuration file; U disk: 500 sets of configuration files, CSV format test data, GIF format images													

# Component & Device Parameter Test Instruments

## I. TH1779 DC Bias Current Source

### Features

- Single 0-50A constant current output, can be used as a host or a slave
- Support up to 8 sets of on-line, maximum 400A constant current output
- Master/slave control mode, flexible cutability and expandability
- Precise current stepping
- 1Hz-2MHz frequency response
- Single current, step scanning two current output modes
- Graphical operation, Chinese and English interface
- Two SCPI command modes, strong adaptability
- 5 control modes
- Directly controlled by TH2836/TH2838 /TH2839/TH2840/ TH2848 series

NEW



### Applications

- Inductor/reactor DC characteristics analysis
- Iron core / ferrite material saturation characteristics analysis
- DC characteristics analysis of other materials

RS232  
standard

USB HOST  
standard

USB DEVICE  
standard

TH1779

Dimension(mm): 430mm(W)x177mm(H)x585mm(D)  
Weight: 26.5kg

### Specifications

Model	TH1779	
Master-slave	Host/Pragmatic	
Display	7-inch 800×480 RGB, TFT LCD screen full-graphical	
Operation	Physical keypad + footswitch	
Current Range	Current Range	
Current Resolution	0.1A	
Measurement frequency support	1kHz-2MHz	
Current rise time	1A/s – 20A/s, can be set arbitrarily	
Current fall time	1A/s – 20A/s, can be set arbitrarily	
Minimum step for scanning adjustment	0.01A	
Maximum Output Voltage	16V	
Maximum Allowable DC Resistance	$R_{max} = V_{max}/I$ ( $\Omega$ ) (For the calculation of $R_{max}$ , please refer to the user manual.)	
Maximum Allowable Inductance	$L_{max} = V_{max}/(di/dt)$ (mH)(For the calculation of $L_{max}$ , please refer to the user manual.)	
Start and stop control mode	START/STOP physical keys, bus, footswitch	
Continuous loading maximum current time	30 Min	
Function	Instrument fault self-test; slave soft switch; real-time operation; SCPI instruction set, etc.	
Interface	RS232,SlaverLink	
Working environment	Normal operation	0°C-55°C
	Reference work	23( $\pm 5$ )°C
	Transportation environment	0°C-55°C
Humidity	Normal operation	<90%RH
	Reference work	<80%RH
	Transportation environment	<93%RH
Power supply	Voltage	AC 220V/110V(1±10%)
	Frequency	50Hz/60Hz(1±5%)
	Power	Standby: <=100VA, Fullload: 1.5kVA
Dimension (mm)		single-unit 430(W)×177(H)×585(D) (Not in cabinet volume)
Weight		single-unit 26.5kg (Weight not in cabinet)

# Component & Device Parameter Test Instruments

## I. TH1778A Series DC Bias Current Source

### Features

- Features
- Provide 0-20A constant current output
- Support the extension to the maximum 120A constant current output
- Master/slave control mode, flexible tailorability and scalability
- Fine current stepping
- 0Hz-2MHz frequency response
- Two current output modes: single current and step scan
- Graphical operation, Chinese and English interface
- Two SCPI command modes, strong adaptability
- 5 control modes
- Directly controlled by TH2829/TH2827/TH2830/TH2838 series



TH1778A

TH1778AS

RS232  
standard

SlaveLink  
standard

### TH1778A Series

Dimension(mm): 430mm(W)x177mm(H)x473mm(D)  
Weight: 18kg

### Applications

- Analysis of DC Characteristics of Inductors/Reactors
- Analysis of saturation characteristics of iron core/ferrite material
- Analysis of DC Characteristics of Other Materials

### Specifications

Model	TH1778A	TH1778B	TH1778AS
Display	7 " 800*600 RGB TFT LCD	-----	-----
Operation	Entitative key + foot switch	Controlled by the host	Controlled by the host
Supporting test frequency	0Hz-2MHz		
Current Range	0±20A	0±20A (No Extension)	0±20A, can extend to 120A
Current	Range	0mA-1.000A	1.000A-5.000A
	Step	5mA	25mA
	Sweep adjustment time	4ms-3600s	10ms-3600s
	Minimum interval of sweep adjustment step	5mA	25mA
Range	1.000A/5.000A/20.0A		20.0A
Maximum output voltage	10V		
Maximum permitted DCR	$R_{max}=V_{max}/I$ ( $\Omega$ ) (Calculation of Rmax, please refer to the description in user manual)		
Maximum permitted inductance value	$L_{max}=V_{max}/(di/dt)$ (mH) (Calculation of Lmax, please refer to the description in user manual)		
Range mode	Auto		
Control mode for START/STOP	START/STOP entitative key, 4 foot switches, Bus		
Max. current time for continuous loading	Keeping 2-3h, continuous output		
Function	Fault self-inspection; 99 groups of custom profile management; dual-progress bar indication; Chinese and English; soft switching of slave machine; real-time operation; SCPI command set; simple dual-display computer.		
LCR Compatible	Controlled by TH2829/TH2827/TH2830/TH2838	Controlled by the host	Controlled by the host
Interface	RS232, Slaver Link		Slaver Link

# Component & Device Parameter Test Instruments

## I. TH300E Microelectronics Teaching Experiment System

### Features

#### 1. Rich experimental projects

The microelectronics teaching experiment system provides up to nine experimental projects, covering microelectronics, integrated circuit design, etc. These experimental projects are designed to help students gain a comprehensive understanding of the basic principles of microelectronics and methods of integrated circuit design.

#### 2. Flexible experimental configuration

According to different teaching needs and experimental course settings, the microelectronics teaching experiment system supports a variety of different experimental configurations. Students can choose appropriate experimental projects according to their own interests and needs for personalized learning and practice.

The experimental platform adopts a modular design and can be configured arbitrarily according to different teaching needs, experimental courses, program budgets, etc.

#### 3. Advanced experimental equipment

The microelectronics teaching experiment system uses advanced experimental equipment and technology, such as the latest technology products: semiconductor CV characteristic tester, digital oscilloscope, dual-channel digital source meter, signal source, etc. These equipment can provide students with real-life microelectronics design, manufacturing and testing environment, which will help students adapt to the microelectronics industry environment more quickly after graduation.

#### 4. Easy-to-operate learning platform

The microelectronics teaching experiment system adopts an intuitive operation interface and friendly human-computer interaction design. The graphic teaching enables students to easily learn the basic principles and experimental operations of microelectronics, integrated circuits, and test instruments. At the same time, the experimental bench also provides detailed experimental steps and troubleshooting guides to help students solve problems encountered during the experiment.



# Component & Device Parameter Test Instruments

## I. TH300E Microelectronics Teaching Experiment System

### Specifications

The microelectronics teaching experiment system supports the following experiments and course systems:

No.	Name	Theory course name	curriculum structure
1	Schottky Barrier Characteristics and Measurement of Impurities	Semiconductor device principles Fundamentals of Solid State Physics Semiconductor material basics Electronic thin film materials and devices	Semiconductor Physics
2	How resistive sensors work and measure	Silicon photonics test experiment	
3	Field effect transistor DC parameter test	Semiconductor device principles Fundamentals of Solid State Physics Semiconductor material basics Analog integrated circuit	Semiconductor device physics
4	PN junction DC characteristics test and PN junction parameters variable temperature test	Semiconductor device principles Fundamentals of Solid State Physics Semiconductor material basics	Semiconductor device reliability
5	Measurement of DC Parameters of Bipolar Transistors	Semiconductor device principles Semiconductor material basics Analog integrated circuit	
6	Test analysis of static characteristics of MOS devices	Semiconductor device principles Semiconductor material basics Analog integrated circuit	Semiconductor device physics
7	MOS device CV characteristic testing	Semiconductor device principles Semiconductor material basics Analog integrated circuit	Semiconductor device reliability
8	MOS device dynamic switching characteristics test	Semiconductor device principles Semiconductor material basics Analog integrated circuit	Integrated circuit principles and design
9	Integrated operational amplifier characteristic analysis test (upper and lower)	Semiconductor device principles Semiconductor material basics digital integrated circuit	

# Micro Signal Type Tester

## I. TH500 Series PIV test system for power semiconductor devices

### Features

- Provide fixed static bias point for narrow pulse dynamic IV measurement, satisfying quasi-isothermal test conditions.
- Realize quantitative measurement and data calculation of device parasitic effects.
- Minimum pulse width as low as 200ns
- Has internal and external synchronization capabilities.
- Pulse timing setting and time domain waveform recording.
- Instruments can be connected with socket & semi-automatic probe station for packaging and wafer-level chip testing.

NEW



USB TMC  
standard  
LAN  
standard

### TH500 Series

Dimension A: 220mm(W)x86mm(H)x378mm(D)

Dimension B: 144mm(W)x62mm(H)x191mm(D)

Dimension C: 144mm(W)x62mm(H)x191mm(D)

Weight A: 3kg

Weight B: 1kg

Weight C: 1kg

### Applications

- This equipment is mainly used for static characteristics and reliability testing of high-voltage power devices. Under a certain bias, a high-voltage pulse signal (Pulse-IV) is provided to the device under test, and then the fast switching process of the device is simulated to test the performance change of the device during operation.

### Specifications

#### 1. Gate probe parameters

##### a) Working Parameter

Working condition		TH500C	
Parameter	Condition	MIN	MAX
Programmable voltage range	static, pulse	-25V	+25V
Pulse amplitude	Programmable maximum and minimum difference		30V
Pulse current	Output or input maximum effective value	-1A	+1A
DC/RMS current		-300mA	+300mA
Pulse power	Output or input		10W
DC Power	Output		3W
	Input		0.5W
Output DC Impedance	1A,10mA Range 100uA Range	14.5Ω±2%	210Ω±2%
Output capacitance		20pF	
Probe to ground impedance	Max 1W	100Ω	

##### b) Pulse parameter

Working condition		TH500C	
Parameter	Condition	MIN	MAX
Duty cycle	Any level under power-limited conditions	0%	100%
Frequency	Maximum Switching Voltage		500kHz
Pulse Width	Minimum pulse width when speed = FAST	200ns	
Rise Time	Speed = FAST, no load, 10% to 90%		33ns (typical value)
Fall time	Speed = FAST, no load, 90% to 10%		32ns (typical value)

##### c) Output voltage parameter

Working condition		TH500C	
Parameter	Condition	typical value	
Programmable resolution	16位	0.8mV	
Absolute accuracy	No load, one year	10mV+0.1%	
Noise	0.01Hz-10kHz, no load, peak noise 0.1Hz-5MHz, no load, peak noise	0.6mV 3mV	
Pulse edge voltage tolerance	Speed=FAST Speed=MEDIUM Speed=SLOW	70mV 30mV 15mV	

##### d) Measurement parameter

Working condition		TH500C			
Parameter	Condition	Voltage range	Current range		
		25V	1A	10mA	100μA
ADC Resolution	16 Digit	880uV	35μA	0.35μA	4.8nA
Setting time	to 99.9% to 99.99%	250ns 400ns	300ns 550ns	350ns 700ns	4μs/400μs -
Recovery delay				0.6μs	1μs
Bandwidth	-3dB	14MHz	14MHz	6MHz	1.3MHz
Absolute Accuracy	Offset+gain	2.5mV+0.07%	200μA+0.07%	15μA+0.08%	0.6μA+0.1%
Noise	Single sampling 128 average	±3.5mV ±0.3mV	±140μA ±1μA	±10μA ±1μA	±1μA ±0.1μA

# Micro Signal Type Tester

## I. TH500 Series PIV test system for power semiconductor devices

### 2. Drain Probe Specifications

#### a) Working Parameter

Working condition		TH500B	
Parameter	Condition	MIN	MAX
Programmable voltage range	static, pulse	0V	+250V
Pulse current	Probe working range		+33A
Pulse storage capacitor		1000uF	
DC/RMS current	Probe working range		+5A
Pulse power	Probe working range		3000W
DC Power	Probe working range		100W
	00.3A Range&Current< 0.7A	2Ω	
Output Impedance	30A, 3A, 0.3A Range & Current> 0.7A	0.4Ω	
Probe to ground impedance	Max 1W	100Ω	
Remote measurement work area	Maximum DC drop of power cord	-0.8V	+0.8V

#### b) Pulse parameter

Working condition		TH500B	
Parameter	Condition	MIN	MAX
Duty cycle	Any value within the power range	0%	100%
	At 250V switch, selects fast speed		50kHz
Frequency	At 250V switch, selects slow speed		10kHz
	Absolute Value		500kHz
Pulse Width	Minimum pulse width when speed = FAST	200ns	
Rise Time	Speed = FAST, no load, 10% to 90%	20ns (typical value)	
Fall time	Speed = FAST, no load, 90% to 10%	22ns (typical value)	

#### c) Output voltage parameter

Working condition		TH500B	
Parameter	Condition	MIN	MAX
Programmable resolution	18 Digit DAC	1mV	
	Positive 10V step	3ms to 30ms	
Small step settling time	Negative 10V step (low voltage drop circuit prohibited)	3ms to 20ms	
	Negative 10V step (used in low voltage drop circuit)	50ms to 80ms	
Full scale setting time	0 to 250V	325ms	
	250V to 0V (low voltage drop circuit prohibited)	200ms	
	250V to 0V (low voltage drop circuit prohibited)	250ms	
Voltage drop of pulse output	Low voltage drop circuit prohibited, 10A current 50μs pulse width	-750mV	-700mV
	Used in low voltage drop circuit, 10A current 50μs pulse width	-60mV	+10mV
Low voltage drop circuit use response time		1μs	

#### d) Measurement parameter

Working condition		TH500B						
Parameter	Condition	Voltage range	Current range	250V	5V	30A	3A	300mA
ADC Resolution	16 bits	4.7mV	90μV	590μA	58μA	5.5μA		
Setting time	to 99.9%	200ns	300ns	250ns	350ns	250ns		
	to 99.99%	300ns	500ns	500ns	600ns	700ns		
Recovery delay			0.5μs		0.5μs	0.5μs		
Bandwidth	-3dB	14MHz	7MHz /4MHz	10MHz	7MHz	10MHz		
Absolute Accuracy	offset + gain	20mV +0.1%	0.7mV +0.1%	5mA +0.3%	2.5mA +0.2%	0.1mA +0.1%		

#### e) Internal protection circuit

Working condition		TH500C
Parameter	Condition	Value
Range Threshold		1A / 33A
Threshold resolution		14 bits, 2.3mA
Threshold Setting Accuracy	Bias + Current Accuracy	100mA + 0.5%

# Micro Signal Type Tester

## II. TH199X Series precision source/measure unit

### Features

- 7-inch capacitive touch screen, resolution 800×480
- Linux operating system
- Four-quadrant precision power output and measurement
- Single/dual channel output and measurement
- Up to  $\pm 210$ V DC voltage,  $\pm 3$ A DC current/ $\pm 10.5$ A pulse
- 10fA/100nV minimum measurement resolution (6 1/2 digits)
- 10fA/100nV minimum supply resolution (6 1/2 digits)
- Up to 1,000,000 dots/sec sampling rate
- Arbitrary waveform generation
- List scan function (minimum 1 $\mu$ s interval)
- Direct generation of I/V curves of diodes, triodes, MOS tubes and IGBTs
- Standard PC software, convenient for computer control and data collection.



RS232	LAN	HANDER	USB HOST	USB DEVICE
standard	standard	standard	standard	standard

### TH199X Series

Shelf volume (mm): 235x132x480  
 Outline volume (mm): 236x154x526  
 Net weight: about 6kg (single channel) / 7.5kg (dual channel)

### Applications

- Semiconductor, discrete and passive component testing  
 Diodes, Laser Diodes, LEDs  
 Photodetectors, Sensors  
 Field effect transistor, triode  
 ICs (ICs, RFICs, MMICs)  
 Resistors, rheostats, thermistors, switches
- Precision electronics and green energy device testing  
 PV  
 Power semiconductor  
 Battery  
 Car  
 Medical instrument  
 Power and DC Bias Sources for Board Level Testing

### Research and Education

New material research  
 Nanodevice properties  
 Giant magnetoresistance  
 Organic equipment  
 Any precision I/V source or measure

### Specifications

Model	TH1991C	TH1991B	TH1991A	TH1991	TH1992B	TH1992A	TH1992		
Display									
Display	7-inch capacitive touch screen, resolution 800×480								
Key Parameters									
Channel			1	1	1	2	2		
Max Output	Voltage		±63V	±210V	±210V	±210V	±210V		
	Current		DC	±1.515A	±3.03A	±3.03A	±3.03A		
	Pulse		-----	-----	±10.5A	-----	±10.5A		
Power Source	Max Digits		Digits	5 1/2	5 1/2	5 1/2	5 1/2		
	Min Resolution		Voltage	1 $\mu$ V	1 $\mu$ V	100nV	1 $\mu$ V		
			Current	1pA	100fA	1pA	10fA		
Measurement	Max Digits		Digits	6 1/2	6 1/2	6 1/2	6 1/2		
	Min Resolution		Voltage	100nV	100nV	100nV	100nV		
			Current	100fA	10fA	10fA	10fA		
Voltage Range			200mV-60V	200mV-200V	200mV-200V	200mV-200V	200mV-200V		
Min Time Interval			50 $\mu$ s	20 $\mu$ s	10 $\mu$ s	1 $\mu$ s	20 $\mu$ s		
					10 $\mu$ s	10 $\mu$ s	1 $\mu$ s		

# Micro Signal Type Tester

## II. TH199X Series precision source/measure unit

Voltage Source (Accuracy: Reading % + Bias, Noise: peak-to-peak (0.1Hz-10Hz))

Range	$\pm 200\text{mV}$	Programming Resolution	100nV
		Accuracy	$\pm(0.015\% + 225\text{ }\mu\text{V})$
	$\pm 2\text{V}$	Programming Resolution	1 $\mu\text{V}$
		Accuracy	$\pm(0.02\% + 350\text{ }\mu\text{V})$
	$\pm 20\text{V}$	Programming Resolution	10 $\mu\text{V}$
		Accuracy	$\pm(0.015\% + 5\text{mV})$
$\pm 200\text{V}$	Programming Resolution	100 $\mu\text{V}$	
	Accuracy	$\pm(0.015\% + 50\text{mV})$	

Voltage Measurement (Accuracy: Reding %+ Bias)

Range	$\pm 200\text{mV}$	Measurement Resolution	100nV
		Accuracy	$\pm(0.015\% + 225\text{ }\mu\text{V})$
	$\pm 2\text{V}$	Measurement Resolution	1 $\mu\text{V}$
		Accuracy	$\pm(0.02\% + 350\text{ }\mu\text{V})$
	$\pm 20\text{V}$	Measurement Resolution	10 $\mu\text{V}$
		Accuracy	$\pm(0.015\% + 5\text{mV})$
$\pm 200\text{V}$	Measurement Resolution	100 $\mu\text{V}$	
	Accuracy	$\pm(0.015\% + 50\text{mV})$	

Current Source (Accuracy: Reading % + Bias, Noise: peak-to-peak (0.1Hz-10Hz))

Range	$\pm 10\text{nA}$	Programming Resolution	10fA
		Accuracy	$\pm(0.10\% + 50\text{pA})$
	$\pm 100\text{nA}$	Programming Resolution	100fA
		Accuracy	$\pm(0.06\% + 100\text{pA})$
	$\pm 1\text{\mu A}$	Programming Resolution	1pA
		Accuracy	$\pm(0.025\% + 500\text{pA})$
	$\pm 10\text{\mu A}$	Programming Resolution	10pA
		Accuracy	$\pm(0.025\% + 1.5\text{nA})$
	$\pm 100\text{\mu A}$	Programming Resolution	100pA
		Accuracy	$\pm(0.02\% + 25\text{nA})$
	$\pm 1\text{mA}$	Programming Resolution	1nA
		Accuracy	$\pm(0.02\% + 200\text{nA})$
	$\pm 10\text{mA}$	Programming Resolution	10nA
		Accuracy	$\pm(0.02\% + 2.5\text{\mu A})$
	$\pm 100\text{mA}$	Programming Resolution	100nA
		Accuracy	$\pm(0.02\% + 20\text{\mu A})$
	$\pm 1\text{A}$	Programming Resolution	1 $\mu\text{A}$
		Accuracy	$\pm(0.03\% + 1.5\text{mA})$
	$\pm 1.5\text{A}$	Programming Resolution	1 $\mu\text{A}$
		Accuracy	$\pm(0.05\% + 3.5\text{mA})$
	$\pm 3\text{A}$	Programming Resolution	10 $\mu\text{A}$
		Accuracy	$\pm(0.4\% + 7\text{mA})$
	$\pm 10\text{A}$ (Pulse)	Programming Resolution	10 $\mu\text{A}$
		Accuracy	$\pm(0.4\% + 25\text{mA})$

# Micro Signal Type Tester

## II. TH199X Series precision source/measure unit

### Current Measurement

Range	±10 nA	Measurement Resolution	10fA
	Accuracy	±(0.10 % + 50 pA)	
	±100nA	Measurement Resolution	100fA
	Accuracy	±(0.06% + 100pA)	
	±1 μ A	Measurement Resolution	1pA
	Accuracy	±(0.025% + 500pA)	
	±10 μ A	Measurement Resolution	10pA
	Accuracy	±(0.025% + 1.5nA)	
	±100 μ A	Measurement Resolution	100pA
	Accuracy	±(0.02% + 25nA)	
	±1mA	Measurement Resolution	1nA
	Accuracy	±(0.02% + 200nA)	
	±10mA	Measurement Resolution	10nA
	Accuracy	±(0.02% + 2.5 μ A)	
	±100mA	Measurement Resolution	100nA
	Accuracy	±(0.02% + 20 μ A)	
	±1A	Measurement Resolution	1 μ A
	Accuracy	±(0.03% + 1.5mA)	
	±1.5A	Measurement Resolution	1 μ A
	Accuracy	±(0.05% + 3.5mA)	
	±3A	Measurement Resolution	10 μ A
	Accuracy	±(0.4% + 7mA)	
	±10A	Measurement Resolution	10 μ A
	Accuracy	±(0.4% + 25mA)	

Pulse source (pulse width refers to the time from 10% rising edge to 90% falling edge, base level: pulse low level, peak level: pulse high level)

Minimum programmable pulse width	50 μ s		
Pulse width programming resolution	1 μ s		
Max Voltage of DC or Pulse	210V	Max Peak Current	0.105A
		Max Base Current	0.105A
		Pulse Width	50 μ s - 99999.9s
		Max Duty Cycle	99.9999%
	21V	Max Peak Current	1.515A
		Max Base Current	1.515A
		Pulse Width	50 μ s - 99999.9s
		Max Duty Cycle	99.9999%
	6V	Max Peak Current	3.03A
		Max Base Current	3.03A
		Pulse Width	50 μ s - 99999.9s
		Max Duty Cycle	99.9999%
Pulse Only	200V	Max Peak Current	1.515A
		Max Base Current	50mA
		Pulse Width	50 μ s - 2.5ms
		Max Duty Cycle	2.5%
	180V	Max Peak Current	1.05A
		Max Base Current	50mA
		Pulse Width	50 μ s - 10ms
		Max Duty Cycle	2.5%
	6V	Max Peak Current	10.5A
		Max Base Current	0.5A
		Pulse Width	50 μ s - 1ms
		Max Duty Cycle	2.5%

# Micro Signal Type Tester

## II. TH199X Series precision source/measure unit

Resistance Measurement (Auto resistance measurement mode, 4-wire, 2V range)

Range	2Ω	Resolution	1 $\mu\Omega$	
		Test Current	1 A	
		Current Range	1 A	
		Total Tolerance	0.2% + 0.00035 $\Omega$	
	20Ω	Resolution	10 $\mu\Omega$	
		Test Current	100mA	
		Current Range	100mA	
		Total Tolerance	0.06% + 0.0035 $\Omega$	
	200Ω	Resolution	100 $\mu\Omega$	
		Test Current	10mA	
		Current Range	10mA	
		Total Tolerance	0.065% + 0.035 $\Omega$	
	2kΩ	Resolution	1mΩ	
		Test Current	1mA	
		Current Range	1mA	
		Total Tolerance	0.06% + 0.35 $\Omega$	
	20kΩ	Resolution	10mΩ	
		Test Current	100 $\mu A$	
		Current Range	100 $\mu A$	
		Total Tolerance	0.065% + 3.5 $\Omega$	
	200kΩ	Resolution	100mΩ	
		Test Current	10 $\mu A$	
		Current Range	10 $\mu A$	
		Total Tolerance	0.06% + 35 $\Omega$	
	2MΩ	Resolution	1Ω	
		Test Current	1 $\mu A$	
		Current Range	1 $\mu A$	
		Total Tolerance	0.095% + 350 $\Omega$	
	20MΩ	Resolution	10Ω	
		Test Current	100nA	
		Current Range	100nA	
		Total Tolerance	0.18% + 3.5k $\Omega$	
	200MΩ	Resolution	10Ω	
		Test Current	10nA	
		Current Range	10nA	
		Total Tolerance	1.08% + 35k $\Omega$	
Interface		RS232C,USB HOST,USB DEVICE,LAN,HANDLER		
Environment and Temperature				
Operation temperature and humidity range		23° C $\pm$ 5° C		
Storage temperature and humidity range		23° C $\pm$ 5° C		
Accuracy guarantees temperature and humidity		23° C $\pm$ 5° C		
Preheat time		60 Minutes		
Ambient temperature change		30% to 80%RH		
Calibration cycle		One year		
General Parameter				
Power Supply		90 V to 264 V, 47 Hz to 63 Hz, 250 VA maximum		
Power		31.8W		
Shelf Size		125mmx132mmx480mm		
Dimensions		236mmx154mmx526mm		
Weight		About 6kg (Single Channel) / 7.5kg (Dual Channel)		

# Micro Signal Type Tester

## II. TH193X Series Low Noise Precision Power Supply

### Features

- 7-inch capacitive touch screen with 800 x 480 resolution
- Linux operating system, Chinese and English interface
- Four-quadrant precision power output
- Single/dual channel output and measurement
- Up to  $\pm 210V$  DC voltage,  $\pm 3A$  DC current/ $\pm 10.5A$  pulse
- $10fA/0.1\mu V$  minimum output resolution (6 1/2 bits)
- $1pA/10\mu V$  minimum measurement resolution (4 1/2 bits)
- Supports voltage, current, resistance, and power measurements
- Four basic modes of voltage source, current source, voltmeter, and ammeter
- Minimum sampling interval  $1\mu s$
- Supports DC, pulse, scanning and list outputs
- Pulse output with a minimum pulse width of  $50\mu s$
- 1mHz-10kHz arbitrary waveform generation and list scan function (minimum  $1\mu s$  interval)
- Flexible programmable output resistance function
- Math operation function, sliding average filter function, deviation deduction function
- 14-speed sorting function with Grading and Sorting modes



NEW

RS232	LAN	HANDER	USB HOST	USB DEVICE
standard	standard	standard	standard	standard

### TH193X Series

Shelf volume (mm): 235x132x490  
Outline volume (mm): 250x154x530  
Net weight: about 8.5kg (single channel) / 10kg (dual channel)

### Applications

- Analog-to-digital converters and digital-to-analog converters
- High-precision analog ICs and circuits
- RF integrated circuits and circuits
- Medical Applications
- Cable/Harness Evaluation
- Voltage Controlled Oscillator (VCO)
- Sensor devices and transducers

- Solar cells and interface circuits
- Electrochemical applications
- Research & Education
- Crystal Oscillators
- Current source for small voltage measurements
- Battery Management Simulator
- Advanced Materials Evaluation

### Specifications

Product Model		TH1931	TH1932	
Display				
Monitor		7-inch capacitive touch color LCD monitor with 800 x 480 resolution		
Key Indicator				
Channels		1	2	
Max Output	Voltage	$\pm 210V$		
	Current	DC	$\pm 3.03A$	
		Pulse	$\pm 10.5A$	
Power Supply	Max Bits	Bits	6 1/2	
	Min. Resolution	Voltage	0.1 $\mu V$	
		Current	0.01pA	
Measurement	Max Bits	Bits	4 1/2	
	Min. Resolution	Voltage	10 $\mu V$	
		Current	1pA	
Voltage Range		0.2V-200V		
Min. Interval Time		1 $\mu s$		
Voltage Output				
Range	Programming Resolution	Accuracy $\pm$ (% of reading + bias)	DC output voltage or pulse peak/base voltage	
			Max. Current <sup>1</sup>	
			DC Output	
			Pulse Output	
			Pulse Width <sup>2</sup>	

# Micro Signal Type Tester

## II. TH193X Series Low Noise Precision Power Supply

0.2V	100nV	$\pm(0.015\%+225\mu V)$	$0 \leq  V  \leq 0.21V$	$\pm 3.03A$	$\pm 3.03A$	$50\mu s \leq t \leq t_{max}$
2V	1 $\mu V$	$\pm(0.015\%+225\mu V)$	$0 \leq  V  \leq 2.1V$		$\pm 10.5A$	$50\mu s \leq t \leq 1ms$
20V	10 $\mu V$	$\pm(0.015\%+5mV)$	$0 \leq  V  \leq 6V$	$\pm 3.03A$	$50\mu s \leq t \leq t_{max}$	$50\mu s \leq t \leq 1ms$
			$0 \leq  V  \leq 21V$	$\pm 1.515A$	$\pm 1.515A$	$50\mu s \leq t \leq t_{max}$
200V	100 $\mu V$	$\pm(0.015\%+50mV)$	$0 \leq  V  \leq 6V$	$\pm 3.03A$	$\pm 3.03A$	$50\mu s \leq t \leq t_{max}$
			$0 \leq  V  \leq 21V$	$\pm 1.515A$	$\pm 1.515A$	$50\mu s \leq t \leq t_{max}$
			$0 \leq  V  \leq 180V$	—	$\pm 1.05A$	$50\mu s \leq t \leq 10ms$
			$0 \leq  V  \leq 200V$	—	$\pm 1.515A$	$50\mu s \leq t \leq 2.5ms$
			$0 \leq  V  \leq 210V$	$\pm 105mA$	$\pm 105mA$	$50\mu s \leq t \leq t_{max}$

### Note:

superscript<sup>1</sup>: Refer to the Limits table section when using channels 1 and 2 for DC outputs or pulsed outputs ( $50\mu s \leq t \leq t_{max}$  (= 99.9999ks)).

superscript<sup>2</sup>: For pulses with  $50\mu s \leq t \leq t_{max}$ , the maximum duty cycle is 99.9999%.

For pulses with  $50\mu s \leq t \leq 1ms$ ,  $50\mu s \leq t \leq 2.5ms$  or  $50\mu s \leq t \leq 10ms$ , the maximum duty cycle is 2.5%.

Current Output						
Range	Setting Resolution	Accuracy $\pm$ (%) of reading + bias)	DC output current or pulse peak/base current <sup>1,2</sup>	Max. Voltage		Pulse Width <sup>3</sup>
				DC Output	Pulse Output	
10nA	10fA	$\pm(0.10\%+50pA)$	$0 \leq  I  \leq 10.5nA$	$\pm 210V$	$\pm 210V$	$50\mu s \leq t \leq t_{max}$
100nA	100fA	$\pm(0.06\%+100pA)$	$0 \leq  I  \leq 105nA$			
1 $\mu A$	1pA	$\pm(0.025\%+500pA)$	$0 \leq  I  \leq 1.05\mu A$			
10 $\mu A$	10pA	$\pm(0.025\%+1.5nA)$	$0 \leq  I  \leq 10.5\mu A$			
100 $\mu A$	100pA	$\pm(0.02\%+25nA)$	$0 \leq  I  \leq 105\mu A$			
1mA	1nA	$\pm(0.02\%+200nA)$	$0 \leq  I  \leq 1.05mA$			
10mA	10nA	$\pm(0.02\%+2.5\mu A)$	$0 \leq  I  \leq 10.5mA$			
100mA	100nA	$\pm(0.02\%+20\mu A)$	$0 \leq  I  \leq 105mA$			
1A	$1\mu A$	$\pm(0.03\%+1.5mA)$	$0 \leq  I  \leq 105mA$	$\pm 210V$	$\pm 210V$	$50\mu s \leq t \leq t_{max}$
			$105mA \leq  I  \leq 1.05A$		$\pm 21V$	$\pm 21V$
			$0 \leq  I  \leq 1.05A$		—	$\pm 200V$
1.5A	$1\mu A$	$\pm(0.05\%+3.5mA)$	$0 \leq  I  \leq 105mA$	$\pm 210V$	$\pm 210V$	$50\mu s \leq t \leq t_{max}$
			$105mA \leq  I  \leq 1.515A$		$\pm 21V$	$\pm 21V$
			$0 \leq  I  \leq 1.515A$		—	$\pm 200V$
			$0 \leq  I  \leq 1.05A$		—	$\pm 180V$
3A	$10\mu A$	$\pm(0.4\%+7mA)$	$0 \leq  I  \leq 105mA$	$\pm 210V$	$\pm 210V$	$50\mu s \leq t \leq t_{max}$
			$105mA \leq  I  \leq 1.515A$		$\pm 21V$	$\pm 21V$
			$1.515A \leq  I  \leq 3.03A$		$\pm 6V$	$\pm 6V$
10A <sup>4</sup>	$10\mu A$	$\pm(0.4\%+25mA)$ <sup>5</sup>	$0 \leq  I  \leq 10.5A$	$\pm 210V$	$\pm 6V$	$50\mu s \leq t \leq 1ms$
			$0 \leq  I  \leq 1.515A$		—	$\pm 200V$
			$0 \leq  I  \leq 1.05A$		—	$\pm 180V$

### \*Note:

superscript<sup>1</sup>: Refer to the Limits table section when using channels 1 and 2 for DC outputs or pulsed outputs ( $50\mu s \leq t \leq t_{max}$  (= 99.9999ks)).

superscript<sup>2</sup>: The maximum base current is 500mA for pulses with  $50\mu s \leq t \leq 1ms$ , and the maximum base current is 50mA for pulses with  $50\mu s \leq t \leq 2.5ms$  or  $50\mu s \leq t \leq 10ms$ .

superscript<sup>3</sup>: The maximum duty cycle is 99.9999% for pulses with  $50\mu s \leq t \leq t_{max}$  and the maximum duty cycle is 2.5% for pulses with  $50\mu s \leq t \leq 1ms$ ,  $50\mu s \leq t \leq 2.5ms$  or  $50\mu s \leq t \leq 10ms$ .

superscript<sup>4</sup>: 10A range for pulse mode only, not for DC mode.

superscript<sup>5</sup>: Measurement speed is 0.01 PLC.

# Micro Signal Type Tester

## II. TH193X Series Low Noise Precision Power Supply

Voltage Measurement				
Range	Voltage Measurement	Resolution	Accuracy	
0.2V	0≤ V ≤0.212V	10μV	±(0.015% + 225μV)	
2V	0≤ V ≤2.12V	100μV	±(0.02% + 350μV)	
20V	0≤ V ≤21.2V	1mV	±(0.015% + 5mV)	
200V	0≤ V ≤212V	10mV	±(0.015% + 50mV)	
Current Measurement				
Range	Current Measurement	Resolution	Accuracy	
10nA	0≤ I ≤10.6nA	1pA	±(0.10 % + 50pA)	
100nA	0≤ I ≤106nA	10pA	±(0.06% + 100pA)	
1μA	0≤ I ≤1.06μA	100pA	±(0.025% + 500pA)	
10μA	0≤ I ≤10.6μA	1nA	±(0.025% + 1.5nA)	
100μA	0≤ I ≤106μA	10nA	±(0.02% + 25nA)	
1mA	0≤ I ≤1.06mA	100nA	±(0.02% + 200nA)	
10mA	0≤ I ≤10.6mA	1μA	±(0.02% + 2.5μA)	
100mA	0≤ I ≤106mA	10μA	±(0.02% + 20μA)	
1A	0≤ I ≤1.06A	100μA	±(0.03% + 1.5mA)	
1.5A	0≤ I ≤1.53A		±(0.05% + 3.5mA)	
3A	0≤ I ≤3.06A	1mA	±(0.4% + 7mA)	
10A <sup>1</sup>	0≤ I ≤10.6A		±(0.4% + 25mA)	
*Note: superscript1 For pulse mode, not for DC mode.				
Pulse source (pulse width is the time from 10% rising edge to 90% falling edge, base level: pulse low level, peak level: pulse high level)				
Minimum programmable pulse width	50μs			
Pulse width programming resolution	1μs			
Interface	RS232C,USB HOST,USB DEVICE,LAN,HANDLER			
Environment & Temperature				
Environment	Suitable for indoor equipment			
Temperature of operating condition	0°C - 55°C			
Humidity of operating condition	30% - 80% RH (non-condensing)			
Elevation of operating condition	0 - 2000M (6561ft)			
Temperature of storage condition	30°C - +70°C			
Humidity of storage condition	10% - 90% RH (non-condensing)			
Elevation of storage condition	0 - 4600M (15092ft)			
Warm-up time after power on	≥60minutes			
General Indicator				
Power supply	90 V to 264V,47 Hz to 63Hz, maximum			
Power consumption	< 250VA			
Rack mount	215mmx132mmx490mm			
Dimension	235mmx154mmx530mm			
Weight	Approx. 8.5kg (single)/10kg (dual)			
Safety	Class I Safety			
EMC standards	IEC61326-1/EN61326-1			
AS/NZS	CISPR 11			
Insulation resistance	Under the reference working conditions, the insulation resistance between the power terminals and the shell is not less than 50MΩ; Under humid and hot transportation conditions, the insulation resistance between the power terminals and the shell is not less than 2MΩ.			
Dielectric strength	Under the reference working conditions, the power terminals and the shell can withstand the rated voltage of 1.5kV, frequency of 50Hz AC voltage for 1 minute, without breakdown and flying arc phenomenon.			
Leakage current	≤3.5mA			
Safety certification	CE,cCSAμs,C-Tick			

# Micro Signal Type Tester

## II. TH2690 Series fA meter/pA meter/Electrometer/High Resistance Meter



### Features

- 5.0-inch capacitive touch screen
- 6½-bit measurement resolution
- Four measurement modes: high resistance meter, voltmeter, ammeter, electrostatic meter
- Independent current and voltage measurement
- Built-in voltage source:  $\pm 3000V$ , resolution: 1mV
- Current range: 2pA-20mA, current resolution up to 0.01fA ( $10^{-17}A$ )
- Internal resistance voltage drop in the lowest current range  $<20 \mu V$
- Measurement resistance up to  $3000P\Omega$  ( $10^{15}\Omega$ )
- Charge measurement down to 2nC range
- Input impedance  $>200T\Omega$
- Supports voltage measurements up to 20V
- Temperature and humidity measurements
- Time-domain view to capture transient signal effects and select specific measurements
- Support data recording
- Configure special shielding test box



RS232	standard	LAN	standard	HANDLER	standard	USB DEVICE	standard	USB HOST	standard	INTERLOCK	standard
-------	----------	-----	----------	---------	----------	------------	----------	----------	----------	-----------	----------

TH2690 Series

### Application

- Material science  
Biomaterials, ceramics, rubber, films, dielectric materials, electrochemical materials, ferroelectric materials, graphene, metals, organic materials, nanomaterials, polymers, semiconductors, etc.
- Electronic Component  
Types of transistors such as capacitors, resistors, diodes, sensors, TFT and CNT, photoelectric devices, solar cells, etc.
- Electronic/non-electronic system  
Ion beam, electron beam, sensor system, particle measurement, embedded precision instrument, etc.

### Specifications

Display			
Display device	5.0-inch capacitive touch color LCD display, 6½-digit Measurement resolution		
Current measurement			
Range	Accuracy	Resolution	Remarks
2pA	$\pm(1\%+5fA)$	0.01fA	It is applicable to TH2695 / TH2695A / TH2690H / TH2691H.
20pA	$\pm(1\%+5fA)$	0.1fA	It is applicable to TH2695 / TH2695A / TH2690 / TH2690H / TH2691 / TH2691H.
200pA	$\pm(0.5\%+5fA)$	0.1fA	It is applicable to TH2695 / TH2695A / TH2690 / TH2690H / TH2691 / TH2691H.
2nA	$\pm(0.2\%+50fA)$	1fA	It is applicable to all models.
20nA	$\pm(0.2\%+3pA)$	10fA	It is applicable to all models.
200nA	$\pm(0.2\%+5pA)$	100fA	It is applicable to all models.
2μA	$\pm(0.1\%+50pA)$	1pA	It is applicable to all models.
20μA	$\pm(0.05\%+500pA)$	10pA	It is applicable to all models.
200μA	$\pm(0.05\%+5nA)$	100pA	It is applicable to all models.
2mA	$\pm(0.05\%+50nA)$	1nA	It is applicable to all models.
20mA	$\pm(0.05\%+500nA)$	10nA	It is applicable to all models.

# Micro Signal Type Tester

## II. TH2690 Series fA meter/pA meter/Electrometer/High Resistance Meter

Resistance measurement			
Range	Accuracy	Resolution	Remarks
1MΩ	±(0.135%+1Ω)	1Ω	It is applicable to TH2695 / TH2695A / TH2690 / TH2690A / TH2690H .
10MΩ	±(0.135%+10Ω)	10Ω	It is applicable to TH2695 / TH2695A / TH2690 / TH2690A / TH2690H .
100MΩ	±(0.185%+100Ω)	100Ω	It is applicable to TH2695 / TH2695A / TH2690 / TH2690A / TH2690H .
1GΩ	±(0.285%+1kΩ)	1kΩ	It is applicable to TH2695 / TH2695A / TH2690 / TH2690A / TH2690H .
10GΩ	±(0.41%+10kΩ)	10kΩ	It is applicable to TH2695 / TH2695A / TH2690 / TH2690A / TH2690H .
100GΩ	±(0.41%+100kΩ)	100kΩ	It is applicable to TH2695 / TH2695A / TH2690 / TH2690A / TH2690H .
1TΩ	±(0.45%+1MΩ)	1MΩ	It is applicable to TH2695 / TH2695A / TH2690 / TH2690A / TH2690H .
10TΩ	±(0.75%+10MΩ)	10MΩ	It is applicable to TH2695 / TH2695A / TH2690 / TH2690A / TH2690H .
100TΩ	±(2.6%+100MΩ)	100MΩ	It is applicable to TH2695 / TH2695A / TH2690 / TH2690H .
Range	Current range	Voltage source	Remarks
1MΩ	200μA	20V	It is applicable to TH2695 / TH2695A / TH2690 / TH2690A / TH2690H .
10MΩ	20μA	20V	It is applicable to TH2695 / TH2695A / TH2690 / TH2690A / TH2690H .
100MΩ	2μA	20V	It is applicable to TH2695 / TH2695A / TH2690 / TH2690A / TH2690H .
1GΩ	200nA	20V	It is applicable to TH2695 / TH2695A / TH2690 / TH2690A / TH2690H .
10GΩ	20nA	20V	It is applicable to TH2695 / TH2695A / TH2690 / TH2690A / TH2690H .
100GΩ	2nA	20V	It is applicable to TH2695 / TH2695A / TH2690 / TH2690A / TH2690H .
1TΩ	2nA	200V	It is applicable to TH2695 / TH2695A / TH2690 / TH2690A / TH2690H .
10TΩ	200pA	200V	It is applicable to TH2695 / TH2695A / TH2690 / TH2690H .
100TΩ	20pA	200V	It is applicable to TH2695 / TH2695A / TH2690 / TH2690H .
Max measurable resistance	3000PΩ( $10^{15}$ )		It is applicable to TH2695.
	1500PΩ( $10^{15}$ )		It is applicable to TH2695A.
	100PΩ		It is applicable to TH2690.
	1000TΩ		It is applicable to TH2690A.
	1000PΩ		It is applicable to TH2690H.
Voltage measurement (independent input unit)			
Range	Accuracy±(%+ error)	Resolution	Remarks
2V	±(0.05%+40μV)	1μV	It is applicable to TH2690 / TH2690A / TH2690H .
20V	±(0.05%+400μV)	10μV	It is applicable to TH2690 / TH2690A / TH2690H .
150V	±(0.05%+300μV)	100μV	It is applicable to TH2695A.
300V	±(0.05%+600μV)	100μV	It is applicable to TH2695.
1500V	±(0.05%+300μV)	1mV	It is applicable to TH2695A.
3000V	±(0.05%+6mV)	1mV	It is applicable to TH2695.
Input impedance	>200TΩ		It is applicable to TH2695 / TH2695A / TH2690 / TH2690A / TH2690H .
Charge measurement (The indicators are valid within 1 second)			
Range	Accuracy	Resolution	Remarks
2nC	±(0.5%+50fC)	1fC	It is applicable to TH2695 / TH2695A / TH2690 / TH2690A / TH2690H .
20nC	±(0.5%+500fC)	10fC	It is applicable to TH2695 / TH2695A / TH2690 / TH2690A / TH2690H .
200nC	±(0.5%+5pC)	100fC	It is applicable to TH2695 / TH2695A / TH2690 / TH2690A / TH2690H .
2μC	±(0.5%+50pC)	1pC	It is applicable to TH2695 / TH2695A / TH2690 / TH2690A / TH2690H .
Voltage source			
Range	Accuracy±(%+ error)	Resolution	Maximum output current
20V	±(0.05%+2mV)	1mV	±20mA
40V	±(0.05%+4mV)	1mV	±20mA
200V	±(0.05%+20mV)	1mV	±20mA
400V	±(0.05%+40mV)	1mV	±20mA
1000V	±(0.05%+100mV)	35mV	±1mA
1500V	±(0.05%+150mV)	1mV	±20mA
3000V	±(0.05%+300mV)	1mV	±20mA
Function of the voltage source	Direct current, scanning (single scan, double scan, list scan), ARB (square wave)		It is applicable to TH2695A / TH2690 / TH2690A / TH2690H .

# Micro Signal Type Tester

## II. TH2690 Series fA meter/pA meter/Electrometer/High Resistance Meter

Temperature measurement range and accuracy		
-40°C-10°C	1°C	It is applicable to TH2695A / TH2690 / TH2690A / TH2690H .
10°C-55°C	0.5°C	It is applicable to TH2695A / TH2690 / TH2690A / TH2690H .
55°C-80°C	1°C	It is applicable to TH2695A / TH2690 / TH2690A / TH2690H .
Humidity measurement range and accuracy		
0-20%RH	4%	It is applicable to TH2695A / TH2690 / TH2690A / TH2690H .
20-80%RH	3%	It is applicable to TH2695A / TH2690 / TH2690A / TH2690H .
80-100%RH	4%	It is applicable to TH2695A / TH2690 / TH2690A / TH2690H .
View mode	Meter view, Graph view, Histogram, Scroll view	
Test terminal		
Voltage input	Triaxial BNC (For TH2695/TH2695A, it is high-voltage BNC)	It is applicable to TH2695A / TH2690 / TH2690A / TH2690H .
Current input	Triaxial BNC	It is applicable to all models.
Voltage output	√	It is applicable to TH2695A / TH2690 / TH2690A / TH2690H .
COMMON	√	It is applicable to all models.
GROUND	Banana jack	It is applicable to all models.
interface		
D/A output	±2VFS	It is applicable to all models.
HANDLER	√	It is applicable to all models.
Communication interface	RS232、USB DEVICE、USB HOST、LAN	It is applicable to all models.
Sensor input	Temperature and humidity	It is applicable to TH2695A / TH2690 / TH2690A / TH2690H .
Interlock input	√	It is applicable to TH2695A / TH2690 / TH2690A / TH2690H .
Ambient temperature and humidity		
Operating temperature and humidity range	0°C--45°C, 30%--80%, Without condensation	
Storage temperature and humidity range	-20°C--60°C, 10%--90%, Without condensation	
Temperature and humidity for ensuring accuracy	23°C±5°C, 30%-80%RH	
Warm-up time	1 hour	
Ambient temperature change	Less than ±3°C after self-calibration	
Calibration period	1 year	
General specifications		
Power supply	AC: 90V-264V,50/60Hz; or DC: 127V-370V	
Power	60W	
Mounting dimensions	215(W)×88(H)×565(D)	It is applicable to TH2695.
	215(W)×88(H)×412(D)	It is applicable to all models except TH2695.
Overall dimensions	235(W)×111(H)×590(D)	It is applicable to TH2695.
	235(W)×111(H)×440(D)	It is applicable to all models except TH2695.
Weight	5.5kg	It is applicable to TH2695.
	4kg	It is applicable to TH2695A.
	3.5kg	It is applicable to all models except TH2695 and TH2695A.

# Micro Signal Type Tester

## II. TH2518 Series Resistance/ Temperature Scanner

### Features

- 4.3 inch 24-color touch LCD screen with 480 × 272 resolution
- Chinese and English optional operation interface
- Up to 90-channel resistance/temperature scan tests
- Support 6 units for free insertion and removal, simultaneous measurement between test units
- Maximum test speed can reach 600 times / sec
- Maximum resistance accuracy: 0.05%, minimum resolution: 10uΩ
- Basic temperature accuracy: 0.2 °C
- The adopted test end of the scan test channel is programmable
- Compatible with scanning and stand-alone measurement modes
- Temperature measurement can support PT100, PT500 and analog voltage three temperature sampling methods
- Temperature compensation function (TC)
- One-click screen capture function
- Data logging function
- Automatic upgrade of instrument operating software via USB HOST
- Comparison sort results of channel, board and machine-level can be output
- Handler interface for online operations



RS232	USB HOST	USB DEVICE	HANDLER	LAN
standard	standard	standard	standard	standard

Foot switch  
option

Dimension(mm):280(W)×88(H)×440(D) Weight:7.5kg

### Application

- Components  
Resistor, inductor, transformer, motor, relay, circuit solder joint, capacitor riveting point
- Cables, connectors  
Strand wire, connectors, switches
- Material  
Heat-sensitive materials (fuses, sensor for thermistors), conductive materials such as metal foil
- New energy  
Electric vehicle battery pack connecting bridge, battery connection resistor

### Specifications

Model	TH2518	TH2518A
Measuring parameters	DC resistance, temperature	DC resistance
Resistance test range	10μΩ — 200kΩ	
Basic resistance test accuracy	0.05%	
Resistance range	Auto and manual (200mΩ, 2Ω, 20Ω, 200Ω, 2kΩ, 20kΩ, 200kΩ)	
Temperature sensor type	PT500 platinum resistance, PT100 platinum resistance, analog voltage input	Temperature test range
Temperature test range	PT100,PT500:-10°C — 99.9°C, Analog:0V — 2V	-----
Temperature test accuracy	PT100, PT500:0.3%*measured value ±0.5°C, Analog:±1%Rd ± 3mV	-----
Measurement mode	Stand-alone, scanning	
Scanning channels	15 channels/boards, and up to 6 boards and 90 channels can be inserted. The board channel is for scanning test, and it is synchronous test between the test boards.	
Test terminal selection of test channel	Arbitrary configuration between channels (programmable)	
Test current	≤100mA	
Measurement speed	Single board: 100 times / sec, 40 times / sec, 2 times / sec, 6 boards: 600 times / sec, 240 times / sec, 12 times / sec	
Temperature compensation	√	-----
Display results	Simultaneous display the test results of 16 channels and support page turning	
Short-circuit clear correction	Support full-scale short-circuit clearing for all channels	
Comparators	Comparison boundaries are set separately for each test channel	
Limit mode	ABSDev, ABS, %	
Trigger mode	Auto trigger, manual trigger, bus trigger, Handler trigger, foot switch trigger	
Test terminal	Four-terminal test	
Storage	30 sets of instrument parameters	

# Micro Signal Type Tester

## II. TH2515 DC Resistance Meter

### Features

- Maximum accuracy: 0.01%
- Temperature accuracy: 0.1°C
- Minimum resolution: 0.1μΩ (resistance)
- Low-resistance test mode can effectively protect DUT
- Multiple measurement combinations of R, LPR, T
- 24 bits, 4.3-inch and 4-wire touch LCD screen
- LCD resolution: 480×272
- Temperature compensation(TC)
- Temperature conversion(Δt)
- Maximum sampling rate: 100samps/sec
- Offset voltage compensation (OVC)
- Customer self-correction(0 ADJ)
- Simultaneously output compare results of 10 bins (OVER, PASS and BEEP)
- Statistics function: CpK, Cp
- 30 groups of parameter files can be saved and loaded
- Screen information can be stored on U-disk
- Data save function brings convenience for saving measurement result
- Automatically update operation software through USB HOST
- Operation languages: Chinese and English
- Intelligent detection for test state error
- Flexible and convenient file operation system
- Handler interface realizes on-line operation.
- Interfaces such as RS232, USB HOST, USB Device and LAN are available and GPIB is optional.
- Compatible with LXI C standard Specifications



RS232	USB HOST	USB DEVICE	HANDLER	LAN	GPIB
standard	standard	standard	standard	standard	option

### TH2515

Rack mount (mm): 215(W)×88(H)×335(D)

Dimension (mm): 235(W)×105(H)×360(D)

Weight: 3.6kg

### Application

#### ■ Components

Resistor, inductor, transformer, motor, relay, circuit solder joint, capacitor riveting point

#### ■ Cables, connectors

Strand wire, connectors, switches

#### ■ Material

Heat-sensitive materials (fuses, sensor for thermistors), conductive materials such as metal foil

#### ■ New energy

Electric vehicle battery pack connecting bridge, battery connection resistor

### Brief Introduction

■ On the basis of rich experience in impedance test and wide market research, now Tonghui launches a new touch screen meter---TH2515 DC Resistance meter. TH2515, with elegant appearance, easy operation and excellent performance, is comparable to the most advanced products in the market.

TH2515 adopts 32 bits CPU and high density SMD technology. 24 bits, 4.3-inch and touch LCD screen brings ease for your eyes and convenience to your operation. For the contact influence of the thermoelectricity on DUT, its elimination is achieved. The maximum 0.01% accuracy and minimum 0.1 μΩ resolution shore up its leading role in testing relay contact resistance, interconnecting resistance, conductor resistance, PCB resistance and welding-hole resistance. Temperature compensation and conversion functions make your tests be free from the effect of the environment temperature. The offset voltage compensation has effectively eliminated the electromotive force of the DUT and its contact potential difference. Automation on production lines can be greatly improved by the realization of ultra-high test speed and the signal output of 10 compare results through HANDLER interface.

Providing 1 optional interface---GPIB and 4 standard ones---RS232C, USB HOST, USB Device and LAN, TH2515 is able to make data communication with PC and further realizes remote control.

### Specifications

Model	TH2515		
Display			
Display	24-bit, 400 X 272 and touch TFT LCD screen		
Reading digits	5 ½ digits		
Resistance measurement			
Measurement range	0.1μΩ --110MΩ		
Resistance range	Current	Resolution	*Accuracy±(ppm of Rd + ppm of Fs)
20 mΩ	1A	0.1μΩ	2500+10
200mΩ		1μΩ	2500+10
200mΩ	100mA	1μΩ	3500+10
2Ω	100mA	10μΩ	350+10

# Micro Signal Type Tester

## II. TH2515 DC Resistance Meter

Model	TH2515				
20Ω	10mA	100μΩ	250+10		
200Ω		1mΩ	100+10		
2kΩ	1mA	10mΩ	100+10		
20kΩ		100mΩ	100+5		
100/200kΩ	100μA	1Ω	100+30		
1/2MΩ	10μA	10Ω	200+10		
10MΩ	1μA	100Ω	1000+60		
100MΩ	100nA	1kΩ	8000+600		
Measurement function					
Resistance measurement time	FAST: 7ms; MED: 22ms; SLOW1: 102ms; SLOW2: 402ms Above data is correct when DISPLAY is OFF; When DISPLAY is ON, 20ms should be added.				
Temperature measurement time	100 ± 10ms				
Test terminal	4-terminal				
Average setup	1-255				
Zero clearing	√				
Range switch	AUTO and Manual				
Trigger mode	Internal, Manual, External, BUS				
Power frequency selection	√ (avoid the interference of the power noise)				
Setting data storage	30 groups				
Low voltage measurement	Open voltage≤ 60mV Effective range: 2Ω, 20Ω, 200Ω, 2kΩ				
Thermal electromotive force elimination	√				
Statistics function	AVG, MAX, MIN, OSD(Overall standard deviation), SSD(Sample standard deviation), Process capacity index (Cp, CpK)				
Measurement error detection	√ (Detect the measurement cable has been connected correctly or not.)				
Multipole connector	√ (Noise abatement function of high-resistance is optional)				
Beep state	Comparator, Bin compare, Button				
Key lock	√				
Temperature measurement					
Temperature measurement1	Sensor: PT500		Display: -99.9°C - 250°C		
Temperature measurement2	Analog input: 0V~2V		Display: -99.9°C - 999.9°C		
Temperature compensation	(Convert the resistance measurement value to that one measured under preset temperature)				
Temperature	(Temperature rising is gained from resistance test values before and after warming)				
Compare Judge					
Comparator	Signal output Beep Limit setup mode	HI/IN/LO Beep mode: OFF, IN, HI/LO Absolute value high/low limit, Percentage high/low limit +nominal value			
Sorting	10 bins, absolute value/ percentage				
External trigger delay time	AUTO: dependent on range, low voltage mode ON/OFF, OVC (offset voltage compensation) ON/OFF MANUAL: 0.000--9.999s				
External input trigger	Rising/Falling edge				
Interface					
Interface	USB DEVICE, USB HOST, RS232C, HANDLER, GPIB (OPTION)				
General specification					
Working condition	Temperature:0°C - 40°C, Humidity:≤ 80%RH				
Storage condition	Temperature:-10°C-50°C, Humidity: ≤90%RH				
Accuracy guarantee condition	Temperature:18°C - 28°C, Humidity:≤ 80%RH				
Power	Voltage Frequency	99V—242V 47.5Hz—63Hz			
Consumption	30 VA				
Dimension	215mm×87mm×335mm (net size) 235mm×105mm×360mm (with foam sheath)				
Weight	Approx. 3.6kg				

\*: the accuracy is guaranteed under certain environmental and test conditions:temperature of 18°C-28°C,humidity is ≤ 80%RH,test speed is SLOW2 and OVC function is ON(see details in Manual).

# Micro Signal Type Tester

## II. TH2516 Series DC Resistance Meter

### Features

- Maximum resistance accuracy: 0.05%
- Temperature accuracy: 0.2°C
- Minimum resolution: 1uΩ
- Low-resistance test mode can effectively protect DUT
- Multiple measurement combinations of R, LPR, T
- 24 bits, 4.3-inch and 4-wire touch LCD screen
- LCD resolution: 480×272
- Temperature compensation(TC)
- Temperature conversion( $\Delta t$ )
- Maximum sample rate: 50samps/sec
- Offset voltage compensation (OVC)
- Customer self-correction(0 ADJ)
- Simultaneously output compare results of 3 bins (OVER, PASS and BEEP)
- Statistics function: CpK, Cp
- 30 groups of parameter files can be saved and loaded
- Screen information can be stored on U-disk
- Data save function brings convenience for saving measurement result
- Automatically update operation software through USB HOST
- Operation languages: Chinese and English
- Flexible and convenient file operation system
- Handler interface realizes on-line operation
- Achieve data communication with PC and remote control through interfaces such as RS232, USB HOST, USB Device



RS232	USB HOST	USB DEVICE	HANDLER
standard	standard	standard	standard

### TH2516 Series

Rack mount (mm): 215(W)×88(H)×335(D)

Dimension (mm): 235(W)×105(H)×360(D)

Weight:3.6kg

### Application

- Components  
Resistor, inductor, transformer, motor, relay, circuit solder joint, capacitor riveting point
- Cables, connectors  
Strand wire, connectors, switches
- Material  
Heat-sensitive materials (fuses, sensor for thermistors), conductive materials such as metal foil
- New energy  
Electric vehicle battery pack connecting bridge, battery connection resistor

### Brief Introduction

- On the basis of rich experience in impedance test and wide market research, now Tonghui launches the new DC impedance measurement instrument with touch and LCD screen ---TH2516 DC Resistance meter. TH2516, with elegant appearance, easy operation and excellent performance, is comparable to the most advanced products in the market.

TH2516 adopts 32 bits CPU and high density SMD technology. 24 bits, 4.3-inch and touch LCD screen brings ease for your eyes and convenience to your operation. The maximum 0.05% accuracy and minimum 1  $\mu\Omega$  resolution shore up its leading role in testing relay contact resistance, interconnecting resistance, conductor resistance, PCB resistance and welding-hole resistance. Temperature compensation and conversion functions make your tests be free from the effect of the environment temperature. The offset voltage compensation has effectively eliminated the electromotive force of the DUT and its contact potential difference. For the contact influence of the thermoelectricity on DUT, its elimination is achieved. Automation on production lines can be greatly improved by the realization of ultra-high test speed and the signal output of 3 compare results through HANDLER interface.

### Specifications

Model	TH2516	TH2516A	TH2516B						
<b>Display</b>									
Display									
24-bit, 480 X 272 and touch TFT LCD screen									
Reading digits									
4½ digits									
<b>Resistance measurement</b>									
Measurement range	1 $\mu\Omega$ --2M $\Omega$	10 $\mu\Omega$ --200k $\Omega$	1 $\mu\Omega$ --20k $\Omega$						
Resistance range	Current	Resolution	Accuracy Rd%+digits	Current	Resolution	*Accuracy Rd%+digits	Current	Resolution	*Accuracy Rd%+digits
20 m $\Omega$	1A	1 $\mu\Omega$	0.100+3	-----			1A	1 $\mu\Omega$	0.100+3
200m $\Omega$	100mA	10 $\mu\Omega$		100mA	10 $\mu\Omega$		100mA	10 $\mu\Omega$	
2 $\Omega$		100 $\mu\Omega$			100 $\mu\Omega$			100 $\mu\Omega$	
20 $\Omega$	10mA	1m $\Omega$		10mA	1m $\Omega$		10mA	1m $\Omega$	
200 $\Omega$	1mA	10m $\Omega$		1mA	10m $\Omega$		1mA	10m $\Omega$	
2k $\Omega$	100 $\mu$ A	100m $\Omega$		100 $\mu$ A	100m $\Omega$		100 $\mu$ A	100m $\Omega$	
20k $\Omega$		1 $\Omega$			1 $\Omega$			1 $\Omega$	
200k $\Omega$	10 $\mu$ A	10 $\Omega$		10 $\mu$ A	10 $\Omega$		-----		
2M $\Omega$	1 $\mu$ A	100 $\Omega$	0.2+2	-----			-----		

# Micro Signal Type Tester

## II. TH2516 Series DC Resistance Meter

Measurement function					
Resistance measurement time	FAST:10ms; MED:25ms; SLOW1:115ms; SLOW2:455ms Above data is correct when DISPLAY is OFF; when DISPLAY is ON, 20ms should be added.				
Temperature measurement time	100 ± 10ms	-----			
Test terminal	4-terminal				
Average setup	1--255				
Zero clearing	√				
Range switch	Auto, Manual				
Trigger mode	Internal, Manual, External, BUS				
Power frequency selection	√ (avoid the interface of the power noise)				
Setting data storage	30 groups				
Low voltage measurement	Open voltage: ≤ 40mV Effective range: 2Ω, 20Ω, 200Ω, 2kΩ				
Thermal electromotive force elimination	√	-----			
Statistics function	AVG, MAX, MIN, OSD (Overall standard deviation), SSD (Sample standard deviation), Process capacity index (Cp, cpk)				
Beep state	Comparator, Button				
Key lock	√				
Temperature measurement					
Temperature measurement1	Sensor: PT500 Display: -99.9°C - 250°C	-----	-----		
Temperature measurement2	Analog input: 0V--2V Display: -999.9°C - 999.9°C	-----	-----		
Temperature compensation	√ (convert the resistance measurement value to that one measured under preset temperature)	-----	-----		
Temperature switch	√ (temperature rising is gained from resistance test values before and after warming)	-----	-----		
Compare Judge					
Comparator	Signal output	HI/IN/LO			
	Beep	Beep mode: OFF, IN, HI/LO			
	Limit setup mode	Absolute value high/low limit, Percentage high/low limit +nominal value			
Sorting		3 bins, absolute value/percentage			
External trigger delay time		Auto: dependent on range, low voltage mode ON/OFF, OVC (offset voltage compensation) ON/OFF Manual: 0.000--9.999s			
External input trigger		Rising/Falling edge			
Interface					
Interface		USB DEVICE, USB HOST, RS232C, HANDLER			
General specification					
Working condition		Temperature:0°C - 40°C, Humidity:≤ 80%RH			
Storage condition		Temperature:-10°C - 50°C, Humidity:≤ 90%RH			
Accuracy guarantee condition		Temperature:18°C - 28°C, Humidity:≤ 80%RH			
Power	Voltage	99V—121V,198V—242V			
	Frequency	47.5Hz—63Hz			
Consumption		30 VA			
Dimension		215mm×89mm×360mm (net size) 235mm×104mm×360mm (with foam sheath)			
Weight		Approx.3.6kg			

\*: the accuracy is guaranteed under certain environmental and test conditions:temperature of 18°C-28°C,humidity is ≤ 80%RH,test speed is SLOW2 (see details in Manual).

# Micro Signal Type Tester

## II. TH2692 Insulation Resistance Tester

### Features

- 5-inch capacitive touch screen, 800 x 480 resolution
- Chinese and English user interface
- Up to 1000V adjustable test voltage, maximum 2.4mA test current
- 10kΩ-100GΩ resistance test range
- Fastest single test about 50ms
- Resistance and current can be sorted and evaluated
- Four-terminal contact test function
- Short circuit test function (battery micro short circuit test)
- 16 test files for quick switching between different test conditions
- Interface: USB DEVICE, RS232C, EXT.I/O, Analog Output, USB-HOST



RS232	USB HOST	USB DEVICE	Analog Output	EXT.I/O
standard	standard	standard	standard	standard

Dimension(mm): 215(W)×89(H)×154(D) Weight: 1.9kg

### Application

- Material Characterization Test  
Semiconductors, nanomaterials, polymer materials, dielectric materials, electrochemical materials, ferroelectric materials, graphene, ceramics, biomaterials, rubber, thin films, metals, organic materials, etc.
- Leakage current and insulation resistance testing of electronic components  
Capacitors, resistors, diodes, transistors, sensors, TFT and CNT types, optoelectronic devices, nano devices, solar cells, switches, relays, etc.
- New Energy Batteries  
Battery cell micro-short test, insulation resistance test
- I-V characterization of semiconductors and other devices

### Specifications

Models	TH2692								
Display	Monitor	5-inch capacitive touch screen, with Chinese and English language user interface							
	Measurement Resolution	3 ¼							
Resistance Measurement	Measurement Range	10kΩ - 100GΩ							
	Measurement Accuracy	I > 100nA	±2% reading						
		10nA < I ≤ 100nA	±5% reading						
	Display Resolution	1nA < I ≤ 10nA	±25% reading						
		R < 1GΩ	3 ¼ digit						
		1GΩ ≤ R < 10GΩ	2 decimal places						
		R ≥ 10GΩ	1 decimal place						
Voltage Output	Setting Range	25V - 1000V							
	Setting Resolution	1V							
	Output Accuracy	1% set voltage ±1V							
	Reading Accuracy	1% set voltage ±1V							
	Display Resolution	25V ≤ set voltage < 40V		0.01V					
		40V ≤ set voltage < 400V		0.1V					
		400V ≤ set voltage ≤ 1000V		1V					
Current Measurement	Range	2mA	200µA	20µA	2µA				
	Test Range	220µA - 2.4mA	22µA - 220µA	2.2µA - 22µA	0 - 2.2µA				
	Display Resolution	3 ¼							
Test Speed	Range	2mA	200µA	20µA	2µA				
	Fast	30-50ms			80ms				
	Medium	200ms							
	Slow	500ms							
Comparator Functions		Upper and lower resistance limits, upper and lower current limits							
Ranges		Auto, 2mA, 200µA, 20µA, 2µA							
Interfaces		RS232C, USB DEVICE, USB HOST, EXT.I/O, Analog							
Memory Capacity		Up to 16 test files inside the instrument							
Operating Temperature and Humidity		0°C - 40°C, ≤80%RH							
Power Supply		AC: 90V-121V (60Hz) or 198V-242V (50Hz), 50/60Hz							
Power		25VA							

# Micro Signal Type Tester

## II. TH2684/TH2684A High Precision IR Tester

### Features

- 320×240 dot-matrix LCD
- Powerful charging function
- High speed measurement:100meas/sec
- High measurement accuracy: $\pm 2\%$  ( $< 1\text{ }\Omega$  )
- Contact detection function for capacitive components
- Measurement range:TH2684 :  $10\text{ }\Omega$  to  $50\text{ }\Omega$

TH2684A:  $10\text{ }\Omega$  to  $100\text{ }\Omega$

- Ultra-low leakage current test: minimum current is  $10\text{ pA}$ , accuracy:  $2\% \pm 2\text{ pA}$
- Measurement voltage:  
TH2684:  $10\text{ V} - 500\text{ V}$ , dual-output  
TH2684A: $10\text{ V}-1000\text{ V}$ ,single-output
- Dual outputs (precharge voltage output and test voltage output) can be set.
- The precharge voltage output can be set to follow the test voltage output and can be finely adjusted on test voltage. Also the precharge voltage can be set to work in independent mode.
- When the test current is less than  $10\text{ nA}$ , the internal input impedance can be selected between  $10\text{ }\Omega$  and  $1\text{ M}\Omega$  to ensure rapid and accurate test.
- TH2684 charge current: $2\text{ mA} , 25\text{ mA} , 200\text{ mA}$  selectable  
TH2684A charge current: $2\text{ mA} , 25\text{ mA} , 100\text{ mA}$  selectable
- 7 current ranges, manual or auto range mode
- 4-bin comparison function
- Programmable sequence test mode
- R-T and I-T Curve test and display mode
- Auto store setup parameters
- Screen hardcopy to be saved as BMP file to a U disk
- Automatically upgrade firmware by a U disk
- Selectable Chinese and English operation interfaces
- Achieve automatic test system by Handler interface
- Achieve remote control by RS232C and USB Device interface
- Support scanning interface for mass tests



RS232	USB HOST	USB DEVICE	HANDLER	SCANNER	GPIB
standard	standard	standard	standard	standard	option

### TH2684/A

Dimension(mm): $400(\text{W}) \times 130(\text{H}) \times 430(\text{D})$   
Weight: $14\text{ kg} / 10\text{ kg}$

### Brief Introduction

■ TH2684/TH2684A High Precision IR Tester is an intelligent measurement instrument that is used for rapid measurements on IR properties of electronic parts and components, dielectric materials, equipments, cables, etc. Large LCD and user friendly menu provide you easier operation.

This instrument is especially designed for capacitor IR test TH2684/TH2684A can achieve rapid measurements through following methods:

① Selectable internal input impedance: If the current is greater than  $10\text{ nA}$ , only  $10\text{ }\Omega$  input impedance can be used; if the current is below  $10\text{ nA}$ , you can choose  $10\text{ }\Omega$  or  $1\text{ M}\Omega$  impedance to test.

② With the built-in dual voltage output, TH2684 can charge large capacitors. By dual voltage output, TH2684 is able to output a precharge voltage up to  $500\text{ V}$ ,  $200\text{ mA}$ . In voltage follow mode, precharge voltage follow with the test voltage output and can be finely adjusted. Above features ensure the perfect charge of capacitive materials.

③ TH2684A can output a voltage of  $1000\text{ V}$ ,  $100\text{ mA}$  to fully charge the capacitive material.

In addition, user can program the sequence measurement steps (up to 18 steps) on TH2684/TH2684A. For instance, charge, wait, test, and discharge steps can be programmed. Each step can last up to 100s.

TH2684/TH2684A has a unique contact detection function. For capacitive material such as capacitors and cables, contact detection function can detect the contact of components under test. Moreover, this detection function will not increase any test time.

TH2684 equips with interfaces of RS232, USB DEVICE, SCANNING and Handler. Handler interface provide convenience for automatic test system; SCANNING interface is useful for mass measurement of components. User can use a scanner to speed measurement of components.

### Application

- Ultra-High Value Resistors
- Insulation resistance and leakage current of capacitors
- Various dielectric insulating materials, equipment, wires and cables
- Insulation testing from safety regulations
- Work as high voltage DC power supply

# Micro Signal Type Tester

## II. TH2684/TH2684A High Precision IR Tester

### Specifications

Model	TH2684	TH2684A
Resistance test		
Range	10 kΩ to 50TΩ	10 kΩ to 100TΩ
Accuracy	Test current > 100pA: 2% Test current ≤ 100 pA: 2% ± Vtest/2pA	
Current test		
range	Range 1 :100uA – 1mA ; Internal Input impedance 10 kΩ	
	Range 2 :10uA – 100uA ; Internal Input impedance 10 kΩ	
	Range 3 :1uA – 10uA ; Internal Input impedance 10 kΩ	
	Range 4 :100nA – 1uA ; Internal Input impedance 10 kΩ	
	Range 5 :10nA – 100nA ; Internal Input impedance 10 kΩ	
	Range 6 :1nA – 10nA ; Internal Input impedance 10 kΩ or 1MΩ (selectable)	
	Range 7 :10pA – 1nA ; Internal Input impedance 10 kΩ or 1MΩ (selectable)	
Accuracy	2% ± 2pA	
Measurement voltage		
Range	10 to 500V, 1V resolution	10 to 1000V, 1V resolution
Accuracy	2% of readout, or ± 1V	
Source resistance	200Ω	
Current limit	2.25, or 200mA	2, 25 , or 100mA
Voltage Output	Manually turn on or off on front panel, or controlled by built-in timer, or by remote control.	
Timing	Programmable charge time: 0 to 1000s	
Measurement delay	0 to 1000s programmable	
Discharge resistance	2kΩ	
Discharge time	t = 0.03 x Cx (in μF), when Vtest falls to 1% of the test level.	
Measurement speed		
Trig mode	Single measurement: < 100ms(exclude charge time) Average up to 100 measurements:<100 + (N-1) x 100 ms (exclude charge)	
Continuous mode	Direct readout: 100ms – 10000ms depending on average number	
Comparator	4 bins:(3 bins for PASS,1 bin for FAIL)	
Range mode	Auto, Hold	
Average times	1 to100	
Memory	20 sets of setup values can be stored.	

### General Specifications

Operating temperature and humidity	10°C - 40°C, ≤90%RH
Power supply	90 to 130 V AC(60Hz) or 198 to 260V AC(50HZ)
Power consumption	TH2684 : 250W TH2684A: 150W

# Micro Signal Type Tester

## II. TH2683A/B Insulation Resistance Meter

### Features

- Test voltage range: 1-1000V(TH2683A)  
1-500V(TH2683B)
- Insulation resistance test range: 100kΩ-10TΩ
- Insulation resistance, leakage current dual display
- 24-bits, 4.3-inch and 4-wire touch LCD screen
- LCD resolution: 480\*272
- Zero clearing function
- Contact detection function for capacitive components
- Fast test: 30ms
- Programmable sequence test mode
- 6 ranges, manual or auto range mode
- 4-bin comparison function: 3 bins for PASS, 1 bin for FAIL
- 20 setup files can be stored in the internal memory, support U-disk
- Measurement data can be stored on U-disk
- Automatically upgrade firmware by a disk
- Selectable Chinese and English operation interfaces
- Handler interface realizes on-line operation
- Achieve remote control by RS232C and USB Device interface
- Footswitch trigger function



RS232 standard    USB HOST standard    USB DEVICE standard    HANDLER standard

### TH2683A/B

Rack mount (mm): 215(W)×88(H)×335(D)  
Dimension (mm): 235(W)×105(H)×360(D)  
Weight: 3.6kg

### Application

- Ultra-High Value Resistors
- Insulation resistance and leakage current of capacitors
- Various dielectric insulating materials, equipment, wires and cables
- Insulation testing from safety regulations

### Specifications

Model	TH2683A	TH2683B
Resistance test		
Test range	100kΩ-10TΩ	100kΩ-5TΩ
Test accuracy	I>10nA :±2% I≤10nA :±5%	
Current test		
Test range	Range 1: 100uA - 1mA, internal input impedance 10kΩ	
	Range 2: 10uA - 100uA, internal input impedance 10kΩ	
	Range 3: 1uA - 10uA, internal input impedance 10kΩ	
	Range 4: 100nA - 1uA, internal input impedance 10kΩ	
	Range 5: 10nA - 100nA, internal input impedance 1MΩ	
	Range 6: 1nA - 10nA, internal input impedance 1MΩ	
Test accuracy	2%±3pA	
Test voltage		
Range	1V-1000V	1V-500V
Accuracy	Voltage≥10V: 1%±1V Voltage<10V: 10%±0.1V	
Current limit	10mA	
ON/OFF	Manually turn on or off it on front panel, or controlled by built-in timer, or by remote control	
Charge time	0-999s programmable	
Measurement delay	0-999s programmable	
Measurement speed	Fast: single measurement time≤30ms;    Slow: single measurement time≤60ms	
Comparator function	4 bins: 3 bins for PASS, 1 bin for FAIL	
Range mode	Auto, Hold	
Memory	Internal memory and external USB disk	

# Micro Signal Type Tester

## II. TH1953/TH1963/TH1963A Digit Multimeter

### Features

- 4.3-inch LCD color display, Chinese and English menu
- 6 1/2 digits 1199999 readings(TH1963/TH1963A)
- 5 1/2 digit 119999 digits reading (TH1953)
- Test speed up to 1000 / s
- Small size, front and rear input terminal, easy to shelve (TH1963 only)
- Histogram, bar graph, trend chart display
- AC low frequency signal can be tested down to 3Hz
- Capacitance test function
- Up to 5V diode test voltage
- Stores data up to 10,000



### Application

- Production line workbench
- Maintenance workbench
- Teaching laboratory
- Automated test equipment

RS232	LAN	USB HOST	USB DEVICE	GPIB OR HANDLER
standard	standard	standard	standard	option

### TH1963

Rack mount (mm): 215(W) x 88(H) x 300(D)  
 Dimension (mm): 235(W) x 105(H) x 320(D)  
 Net weight: 2.7 kg

### Specifications

Model	TH1963	TH1963A	TH1953	
Display	4.3-inch LCD color display			
Display digits	1199999 digits reading			119999 digits reading
Measurement parameters				
Measurement speed	Up to 1000 times / s			
Math function	Reset function, Min / Max / Average / Standard deviation, dB, dBm			
Common features	Range	Trigger mode	Reading-hold	Limit measurement
	Auto / Manual	LOCAL: AUTO / SINGLE / EXT REMOTE: IMMEDIATE / BUS / EXT	Yes	Hi, Lo and IN (PASS), with sound beep
Technical Index	Uncertainty: $\pm$ (% of reading $\pm$ % of range), $T_{CAL}=25^\circ\text{C}$			
Parameters	Range / Test Range		Frequency	Highest annual accuracy $T_{CAL} \pm 5^\circ\text{C}$
				TH1963 TH1963A TH1953
DC voltage	100.0000 mV - 1000.000V (TH1963/A) 100.000 mV - 1000.00V (TH1953)			0.0035 $\pm$ 0.0005 0.0075 $\pm$ 0.0005 0.010 $\pm$ 0.004 0.0005 $\pm$ 0.0001
True RMS AC voltage	100.000mV - 750.000V		3 - 5Hz	1.00 $\pm$ 0.03
			5 - 10Hz	0.35 $\pm$ 0.03
			10Hz - 20kHz	0.06 $\pm$ 0.03
			20 - 50kHz	0.12 $\pm$ 0.05
			50 - 100kHz	0.60 $\pm$ 0.08
DC Resistance	10Ω-100MΩ, Test current:10mA - 500nA			4.00 $\pm$ 0.50
				4.00 $\pm$ 0.50
DC current	100μA - 10mA 100mA			0.050 $\pm$ 0.006 0.050 $\pm$ 0.005 0.050 $\pm$ 0.008 0.0020 $\pm$ 0.0005
	1A			0.050 $\pm$ 0.004 0.050 $\pm$ 0.004 0.050 $\pm$ 0.004 0.0020 $\pm$ 0.0005
	3A			0.100 $\pm$ 0.004 0.100 $\pm$ 0.004 0.100 $\pm$ 0.004 0.0050 $\pm$ 0.0010
	10A			0.200 $\pm$ 0.020 0.200 $\pm$ 0.020 0.200 $\pm$ 0.020 0.0050 $\pm$ 0.0020
				0.120 $\pm$ 0.010 0.120 $\pm$ 0.010 0.120 $\pm$ 0.010 0.0050 $\pm$ 0.0010
AC current	100μA - 100mA		3kHz - 5kHz	1.00 $\pm$ 0.04
			5kHz - 10kHz	0.10 $\pm$ 0.04
	1A		3kHz - 5kHz	0.10 $\pm$ 0.04
			5kHz - 10kHz	0.10 $\pm$ 0.04
	3A		3Hz - 5kHz	0.23 $\pm$ 0.04
Frequency	3Hz - 10Hz		5kHz - 10kHz	0.23 $\pm$ 0.04
	10Hz - 100Hz			0.23 $\pm$ 0.04
	100Hz - 1kHz			0.15 $\pm$ 0.04
	100Hz - 300kHz			0.15 $\pm$ 0.04
	Square wave			0.15 $\pm$ 0.04
Diode	5V, Test current:1mA			0.100 0.100 0.100 0.0002
Breakover	1kΩ, Test current:1mA			0.030 0.030 0.030 0.0002
Capacitance	1.0000nF			0.010 0.012 0.012 0.0002
	10.000nF - 1.0000mF			0.010 0.012 0.012 0.0002
	10.000mF			0.10 0.10 0.10 0.02
Temperature	PT100 (DIN/ IEC 751)			Probe accuracy $\pm$ 0.05°C
	5 kΩ Thermistor			Probe accuracy $\pm$ 0.10°C
General technical parameters				
Operating temperature, humidity	0°C-40°C, $\leq$ 90%RH			
Power	Voltage	99V-121V,198-V242V AC		
Power consumption	Frequency	47Hz-63Hz		
Power consumption		Maximum 80VA		

# Micro Signal Type Tester

## I. TH2554 Series Data Acquisition

### Features

- 7-inch color capacitive touch screen, 800 x 480 resolution
- Linux operating system
- 5-slot mainframe, standard with 6 1/2 multimeter card
- Stand-alone support for up to 160 channels, single-channel cost is very low
- 6 1/2 multimeter (DMM) card supports DCV, DCI, ACV, ACI, 2WR, 4WR, period, frequency, temperature
- Temperature acquisition supports thermocouples, thermistors, and RTDs
- 0.0035% DC voltage (DCV) measurement accuracy
- 0.0100% base resistance measurement accuracy
- Scanning Speed  
Basic card: 90 channels/sec  
Fast card: 800 channels/sec
- USB data direct storage Standard SCPI command set
- Standard SCPI command set



RS232	LAN	HANDER	USB HOST	USB DEVICE
standard	standard	standard	standard	standard

### TH2554 Series

Rack mount (mm): 215(W) x 132(H) x 490(D)

Dimension (mm) : 235(W) x 154(H) x 530(D)

Weight: 7.8kg

### Applications

#### ■ Industrial

Motor, transformer, magnetic core, etc. temperature rise evaluation  
Resistance sintering furnace, new energy battery, charging pile, automobile motor, LED lamp, chip temperature test.

#### ■ Agriculture

Temperature monitoring of vegetable greenhouses, fruit greenhouses, seed refrigerators, etc.

#### ■ Chemical industry

Temperature monitoring of reaction furnace, production equipment, etc.

#### ■ Animal husbandry

Temperature monitoring of breeding greenhouses, pens, food preservation, seafood warehouses, etc.

#### ■ Medicine

Temperature monitoring of wards, examination rooms, drug storage rooms, sperm banks, ambulances, etc.

### Specifications

#### 1.DC Voltage

Range	24 Hours $T_{CAL} \pm 1^\circ C$	90 Days $T_{CAL} \pm 5^\circ C$	1 Year $T_{CAL} \pm 5^\circ C$	2 Year $T_{CAL} \pm 5^\circ C$	Temperature Coefficient/ $^\circ C$
100.0000 mV	0.0030+ 0.0030	0.0040 + 0.0035	0.0050 + 0.0035	0.0065 + 0.0035	0.0005 + 0.0005
1.000000V	0.0020+ 0.0006	0.0030 + 0.0007	0.0040 + 0.0007	0.0055 + 0.0007	0.0005 + 0.0001
10.00000V	0.0015+ 0.0004	0.0020 + 0.0005	0.0035 + 0.0005	0.0050 + 0.0005	0.0005 + 0.0001
100.0000V	0.0020+ 0.0006	0.0035 + 0.0006	0.0045 + 0.0006	0.0060 + 0.0006	0.0005 + 0.0001
300.000V	0.0020+ 0.0006	0.0035+ 0.0010	0.0045+ 0.0010	0.0060 + 0.0010	0.0005 + 0.0001

#### 2.DC Resistance

Range	Test Current	24 Hours $T_{CAL} \pm 1^\circ C$	90 Days $T_{CAL} \pm 5^\circ C$	1 Year $T_{CAL} \pm 5^\circ C$	2 Year $T_{CAL} \pm 5^\circ C$	Temperature Coefficient/ $^\circ C$
10 $\Omega$	10mA	0.0050+ 0.0030	0.008+ 0.004	0.010+ 0.004	0.012+ 0.004	0.0006 + 0.0005
100 $\Omega$	1mA	0.0030+ 0.0020	0.008+ 0.003	0.010+ 0.003	0.012+ 0.003	0.0006 + 0.0003
1k $\Omega$	1mA	0.0020+ 0.0005	0.008+ 0.001	0.010+ 0.001	0.012+ 0.001	0.0006 + 0.0001
10k $\Omega$	100uA	0.0020+ 0.0005	0.008+ 0.001	0.010+ 0.001	0.012+ 0.001	0.0006 + 0.0001
100k $\Omega$	10uA	0.0020+ 0.0005	0.008+ 0.001	0.010+ 0.001	0.012+ 0.001	0.0006 + 0.0001
1M $\Omega$	5uA	0.002 + 0.001	0.008+ 0.001	0.010+ 0.001	0.012+ 0.001	0.0030+ 0.0030
10M $\Omega$	500nA	0.15 + 0.001	0.20+ 0.001	0.40+ 0.001	0.60+ 0.001	0.0030+ 0.0030
100M $\Omega$	500nA/10M	0.300+ 0.010	0.800+ 0.010	0.800+ 0.010	0.800+ 0.010	0.0030+ 0.0030

# Micro Signal Type Tester

## I. TH2554 Series Data Acquisition

### 3.DC Current

Range	Internal Resistance Voltage Drop	24 Hours $T_{CAL} \pm 1^\circ C$	90 Days $T_{CAL} \pm 5^\circ C$	1 Year $T_{CAL} \pm 5^\circ C$	2 Year $T_{CAL} \pm 5^\circ C$	Temperature Coefficient/ $^\circ C$
100uA	<0.11V	0.010 + 0.020	0.040 + 0.025	0.050 + 0.025	0.060 + 0.025	0.0020+ 0.0030
1mA	<0.11V	0.010 + 0.006	0.030 + 0.006	0.050 + 0.006	0.060 + 0.006	0.0020+ 0.0005
10mA	< 0.5 V	0.010 + 0.020	0.030 + 0.020	0.050 + 0.020	0.060 + 0.020	0.0020+ 0.0020
100mA	< 0.5 V	0.010 + 0.004	0.030 + 0.005	0.050 + 0.005	0.060 + 0.005	0.0020+ 0.0005
1A	< 0.7 V	0.050 + 0.006	0.080 + 0.010	0.100 + 0.010	0.120 + 0.006	0.0050+ 0.0010
3A	< 2.0 V	0.180 + 0.020	0.200 + 0.020	0.200 + 0.020	0.230 + 0.020	0.0050+ 0.0020
10A	< 0.5 V	0.050 + 0.010	0.120 + 0.010	0.120 + 0.010	0.150 + 0.010	0.0050+ 0.0010

### 4.Diode Test

Function	Test Current	24 Hours $T_{CAL} \pm 1^\circ C$	90 Days $T_{CAL} \pm 5^\circ C$	1 Year $T_{CAL} \pm 5^\circ C$	2 Year $T_{CAL} \pm 5^\circ C$	Temperature Coefficient/ $^\circ C$
5V	1mA	0.002 + 0.030	0.008 + 0.030	0.010+ 0.030	0.012 + 0.030	0.0010+ 0.0020

### 5.Continuity (Conductivity) Test

Function	Test Current	24 Hours $T_{CAL} \pm 1^\circ C$	90 Days $T_{CAL} \pm 5^\circ C$	1 Year $T_{CAL} \pm 5^\circ C$	2 Year $T_{CAL} \pm 5^\circ C$	Temperature Coefficient/ $^\circ C$
1k $\Omega$	1mA	0.002 + 0.030	0.008 + 0.030	0.010+ 0.030	0.012 + 0.030	0.0010+ 0.0020

### 6.Temperature Test

Temerature	
PT100 (DIN/ IEC 751)	Probe Accuracy + 0.05 $^\circ C$
5 k $\Omega$ Thermistor	Probe Accuracy + 0.10 $^\circ C$

### 7.AC Voltage Test

Frequency/Range	24 Hours $T_{CAL} \pm 1^\circ C$	90 Days $T_{CAL} \pm 5^\circ C$	1 Year $T_{CAL} \pm 5^\circ C$	2 Year $T_{CAL} \pm 5^\circ C$	Temperature Coefficient/ $^\circ C$
3-5 Hz	1.00+0.02	1.00+0.02	1.00+0.03	1.00+0.03	0.100+0.003
5-10 Hz	0.35+0.02	0.35+0.03	0.35+0.03	0.35+0.03	0.035+0.003
10 Hz-20 kHz	0.04+0.02	0.05+0.03	0.06+0.03	0.07+0.03	0.005+0.003
20-50 kHz	0.10+0.04	0.11+0.05	0.12+0.05	0.13+0.05	0.011+0.005
50-100 kHz	0.55+0.08	0.60+0.08	0.60+0.08	0.60+0.08	0.060+0.008
100-300 kHz	4.00+0.50	4.00+0.50	4.00+0.50	4.00+0.50	0.200+0.020

### 8.AC Current Test

Frequency/Range	Pressure Drop	24 Hours $T_{CAL} \pm 1^\circ C$	90 Days $T_{CAL} \pm 5^\circ C$	1 Year $T_{CAL} \pm 5^\circ C$	2 Year $T_{CAL} \pm 5^\circ C$	Temperature Coefficient/ $^\circ C$
Range						
100 $\mu$ A	<0.011V					
1mA	< 0.11V					
10mA	<0.05V					
100mA	<0.5V					
3Hz- 5kHz		0.10+0.04	0.10+0.04	0.10+0.04	0.10+0.04	0.015+0.006
5kHz - 10kHz		0.10+0.04	0.10+0.04	0.10+0.04	0.10+0.04	0.030+0.006
1A Range	<0.7V					
3Hz- 5kHz		0.10+0.04	0.10+0.04	0.10+0.04	0.10+0.04	0.015+0.006
5kHz - 10kHz		0.10+0.04	0.10+0.04	0.10+0.04	0.10+0.04	0.030+0.006
3A Range	<2.0V					
3Hz- 5kHz		0.23+0.04	0.23+0.04	0.23+0.04	0.23+0.04	0.015+0.006
5kHz - 10kHz		0.23+0.04	0.23+0.04	0.23+0.04	0.23+0.04	0.030+0.006
10A Range	<0.5V					
3Hz- 5kHz		0.15+0.04	0.15+0.04	0.15+0.04	0.15+0.04	0.015+0.006
5kHz - 10kHz		0.15+0.04	0.15+0.04	0.15+0.04	0.15+0.04	0.030+0.006

# Micro Signal Type Tester

## II. TH2523 Battery Tester

### Features

- Multiple test functions
  - 4-terminal test, the test can't be influenced by impedance of test leads.
  - Contact inspection, to inspect the contact of test leads in testing
  - Deviation deduction (rel) and reference operation, eliminate the influence of base to test result.
- Feature of battery tester
  - Basic impedance accuracy: 0.1%
  - Basic voltage accuracy: 0.1%
  - Min. resolution of impedance:  $1\mu\Omega$
  - Min. resolution of voltage:  $100\mu V$
  - Max. test speed 50 times/s
  - 1kHz AC constant current source test
- R, V, L, Z,  $\theta$  test
- 24 bit color 4.3 inch LCD display
- LCD resolution 480×272
- Direct and  $\Delta\%$  display
- V, I test signal level monitor function
- Graphic scanning and analysis
- 10 bin compare, High limit, low limit, pass and alarm function
- Statistics, like CpK, Cp.etc
- 100 groups of file for storage and load
- Information in screen stored in U disk.
- Automatic update through USB HOST
- Chinese-English operation system selectable
- Foot switch trigger function



RS232	USB HOST	USB DEVICE	HANDLER	GPIB
standard	standard	standard	standard	option

### TH2523/A

Rack mount (mm): 215(W)×88(H)×335(D)  
Dimension (mm): 235(W)×105(H)×360(D)  
Weight: 3.6kg

### Application

- Fast test for button battery and battery pack .etc.
- For cell phone, home appliances, electric vehicle and bike .etc.
- For high voltage battery test
- For early battery R&D test
- Contact resistance test
- Degradation and lifetime - evaluation of battery
- UPS on-line test
- ESR test of super capacitor

### Specifications

Model	TH2523		TH2523A
Display	Displayer	4.3 inch 480x272 24 bit color TFT display	
	Displayed digit	R: slow 5 digits, Max. displayed digit 35000; fast, Max. displayed digit 3500 V: slow 5 digit, Max. displayed digit 35000; fast, Max. displayed digit 3500	
Parameter	R,V,R-V,Z- $\theta$ ,Z- $\theta$ , L-Q,L-R,R-X,R-Q		
Basic accuracy	R:0.1%, V:0.05%		
Test signal source	Frequency	1kHz $\pm 0.2\text{Hz}$ sine waveform	
	Constance current	100mA/10mA/1mA/100uA/10uA	
Display range	R/ Z/ X	1u $\Omega$ —3.5k $\Omega$	
	DC V	100uV—65V	100uV—350V
	L	0.2nH-1H	
	Q	0.001—9999.9	
	$\theta$ d(deg)	-179.99—179.99	
	$\theta$ d(rad)	-3.1416—3.1416	
Mathematics	Direct, $\Delta$ ABS, $\Delta\%$		
Range	AC R	30m $\Omega$ /300m $\Omega$ /3 $\Omega$ /30 $\Omega$ /300 $\Omega$ /3k $\Omega$	
	DC V	6V/60V	30V/300V
Max. input voltage	65V		
Test speed(time/s)	FAST: 50 times/s ; MED: 10 times/s SLOW1: 5 times/s; SLOW2: 3 times/s		
Comparator	10 bins		
Range mode	Auto, hold		
Trigger mode	Internal, manual, external, bus		
Operation mode	Test leads contact inspection; DUT I/V monitor; REL; short “0” ; 1-255 average; delay setting; graphic analysis and scanning; USB storage; Max.100 groups of file save/load; Statistics of Max.30000 of data		
General specification			
Operating environment	Temperature	0°C -40°C	
	Humidity	$\leq 90\%$ RH	
Power supply	Voltage	100V-120V , 198V-242V	
	Frequency	47Hz - 63Hz	
Power consumption	Max.15AV		

# Power Electric Tester

## III. TH6200 Series DC Power Supply

### Features

- Fresh and simple system settings with Chinese and English operation interfaces
- High resolution: 24-bit color 4.3-inch TFTLCD, resolution: 480 x 272
- Linear design and double range output
- High precision and high stability, low ripple and low noise
- 1/2 2U super mini size and output and sampling terminal on the front and rear panel
- Powerful programming ability
  - 100 groups of setting state memory saving and calling 10 trigger files, 100 test sequences per file, loop output of programming
- Timing output: time (0.1-99999.9s)
- Use rotary knob and numeric keyboard to set the voltage, current and output time
- Panel function button with backlight display
- Remote measurement function, compensation for line voltage drop
- Output control switch
- Copy screen function
- Over voltage, over current protection
- Intelligent temperature control fan
- Support standard SCPI communication protocol
- Software monitoring via computer
  - Upgrade instrument firmware via USB flash

### Specifications

Model	TH6201		TH6202		TH6203		TH6212		TH6213							
Rated output (0°C-40°C)	Channel/Range	Range1	Range2	Range1	Range2	Range1	Range2	Range1	Range2	Range1						
	Voltage	0-20V	0-8V	0-32V	0-15V	0-72V	0-32V	0-32V	0-15V	0-72V						
	Current	0-5A	0-10A	0-3A	0-6A	0-1.5A	0-3A	0-6A	0-12A	0-3A						
	Power	100W	80W	96W	90W	108W	96W	192W	180W	216W						
Load regulation ± (% Output + Bias)	Voltage	≤0.01% + 4mV		≤0.01% + 3mV		≤0.01% + 3mV		≤0.01% + 6mV		≤0.01% + 5mV						
	Current	≤0.01% + 2mA						≤0.01% + 5mA		≤0.01% + 4mA						
Power regulation ± (% Output + Bias)	Voltage	≤0.01% + 4mV		≤0.01% + 3mV		≤0.01% + 3mV		≤0.01% + 6mV		≤0.01% + 5mV						
	Current	≤0.01% + 2mA						≤0.01% + 5mA		≤0.01% + 4mA						
Programming resolution	Voltage	1mV														
	Current	0.1mA														
Read-back value resolution	Voltage	1mV														
	Current	0.1mA														
Year accuracy (25°C± 5°C) ± (% Reading + Bias)	Programming	Voltage	≤0.04% + 8mV													
		Current	≤0.1% + 5mA													
	Read- back	Voltage	≤0.04% + 8mV													
		Current	≤0.1% + 5mA													
Ripple and Noise (20Hz-20MHz)	Normal mode voltage	≤3mVp-p/1mVrms		≤4mVp- p/1mVrms		≤3mVp-p/1mVrms		≤4mVp-p/1mVrms								
	Normal mode current	<9mA rms		<7mA rms		<6mA rms		<10mA rms		<8mA rms						
	Common mode current	<1.5μA rms														
Transient response		<50μS (the time required for the output returns within 75mV when the output current changes from full scale to half or from half to full scale)						<50μS (the time required for the output returns within 120mV when the output current changes from full scale to half or from half to full scale)		<50μS (the time required for the output returns within 75mV when the output current changes from full scale to half or from half to full scale)						
Rise time (10% — 90%)		<90ms						<120ms		<180ms						
Fall time (90% — 10%)		<150ms		<200ms		<250ms		<350ms		<250ms						
Series and parallel set value accuracy	Voltage	-----														
	Current	-----														
Timer		0.1 ~ 99999.9 seconds														
Memory		10 groups of trigger output, 100 steps for each group, 100 sets of setting memory														



CE

### TH6200 Series

Rack mount (mm): 215(W) x 88(H) x 396(D)

Dimension (mm): 236(W) x 111(H) x 426(D)

Net weight: 8.1 kg

### Application

- R & D and design verification common test
- Production line table routine testing and maintenance
- Automated device integration testing
- Solar photovoltaic simulation test
- New power car simulation test
- Teaching laboratory

# Power Electric Tester

## III. TH6300 Series DC Power Supply

### Features

- 480x272 pixels, 24-bit color, 4.3-inch color TFT LCD screen for setting test conditions and display of testing results, etc.
- Digital keyboard and knob operation, simple and fast
- High accuracy, high resolution, low ripple and low noise
- Support shutdown data saving and boot data loading
- Support voltage test function
- Support data saving and callback
- List setting and step output
- Intelligent fan control to save energy and reduce noise
- Software control and detection via computer
- Interface: RS232, USB, GPIB (optional)



CE

RS232	USB HOST	USB DEVICE	GPIB
standard	standard	standard	option

### TH6300 Series

Rack mount (mm): 215(W) x 88(H) x 412(D)  
 Dimension (mm): 235(W) x 111(H) x 440(D)  
 Net weight: 8.1kg

### Application

- R & D and design verification common test
- Production line table routine testing and maintenance
- Automated device integration testing
- Solar photovoltaic simulation test
- New power car simulation test
- Teaching laboratory

### Specifications

Module	TH6301	TH6302	TH6303	TH6304	TH6312	TH6313	TH6314	TH6323	TH6324
Rated output	Voltage	20V	30V	60V	120V	30V	60V	120V	60V
	Current	30A	20A	10A	5A	30A	15A	6A	25A
	Power	200W	200W	200W	200W	360W	360W	360W	600W
Load regulation	Voltage	0.01%+20mV	0.01%+20mV	≤0.01%+5mV	≤0.01%+5mV	0.01%+20mV	≤0.01%+8mV	≤0.01%+8mV	≤0.01%+15mV
	Current	0.01%+20mA	0.01%+15mA	≤0.01%+4mA	≤0.01%+4mA	0.01%+20mA	≤0.01%+6mA	≤0.01%+6mA	≤0.01%+10mA
Power regulation	Voltage	0.01%+20mV	0.01%+20mV	≤0.01%+5mV	≤0.01%+5mV	0.01%+20mV	≤0.01%+8mV	≤0.01%+8mV	≤0.01%+15mV
	Current	0.01%+20mA	0.01%+15mA	≤0.01%+4mA	≤0.01%+4mA	0.01%+20mA	≤0.01%+6mA	≤0.01%+6mA	≤0.01%+10mA
Set value resolution	Voltage					1mV(<100V), 10mV(>100V)			
	Current					0.1mA(<10A), 1mA(>10A)			
Read-back resolution	Voltage					1mV(<100V), 10mV(>100V)			
	Current					0.1mA(<10A), 1mA(>10A)			
Year set accuracy (25°C±5°C)≤	Voltage	0.05%+10mV	0.05%+10mV	0.05%+10mV	0.05%+15mV	0.05%+10mV	0.03%+15mV	0.05%+10mV	0.05%+15mV
	Current	0.1%+30mA	0.1%+20mA	0.1%+10mA	0.1%+20mA	0.1%+30mA	0.1%+15mA	0.1%+20mA	0.1%+25mA
Year read-back accuracy (25°C±5°C)≤	Voltage	0.05%+10mV	0.05%+10mV	0.05%+10mV	0.05%+15mV	0.05%+10mV	0.03%+15mV	0.05%+10mV	0.05%+15mV
	Current	0.1%+30mA	0.1%+20mA	0.1%+10mA	0.1%+20mA	0.1%+30mA	0.1%+15mA	0.1%+20mA	0.1%+25mA
Ripple and Noise (20Hz-20MHz)≤	Differential mode voltage	15mVpp	15mVpp	15mVp-p	20mVp-p	15mVpp	15mVp-p	20mVpp	20mVp-p
	Differential mode current	10mArms	10mArms	8mArms	10mArms	12mArms	10mArms	12mArms	13mArms
Rise time≤	10%-90%	100ms	100ms	150ms	150ms	100ms	150ms	150ms	150ms
Fall time≤	90%-10%	2s	2s	2s	3.5s	2s	2s	3.5s	3.5s
DVM	Accuracy	0.05%+10mV	0.05%+10mV	0.03%+5mV	0.04%+30mV	0.05%+10mV	0.03%+5mV	0.05%+15mV	0.03%+5mV
	resolution					1mV			
	Voltage range	20V	30V	60V	120V	30V	60V	120V	60V
Memory	10 sets of trigger output, 100 steps per group, 100 groups of set memory								
Output	Support front and rear panel output, the maximum output current of front terminal is 10A								

# Power Electric Tester

## III. TH6420 Series Multi-channel Programmable Linear DC Power Supply

### Features

- Voltage/current resolution up to 1mV/1mA
- 5-digit voltage/4-digit current LED display (TH6423)
- Five groups of programmable callback files
- Callback file programmable list output function
- Output upper and lower limit setting and over limit alarm function
- Set data power-off save function
- Series and parallel function of channel 1 and channel 2
- Automatic switching between CC and CV modes
- Keyboard knob quick operation
- The status light indicates the key setting status of the instrument and the working status of CC/CV
- Fan automatic speed adjustment function

### Application

- General testing for R&D and design verification
- Routine testing and maintenance of production line workbench
- Automated device integration testing
- Teaching laboratory

### Specifications

Model	TH6422A				TH6422				TH6423				
Rated Output (0°C-40°C)	Channel	CH1	CH2	CH3	CH1	CH2	CH3	CH1	CH2	CH3	CH4		
	Voltage	0-32V	0-32V	0-5V	0-32V	0-32V	0-5V	0-32V	0-32V	0-5V/0-10V	0-5V		
	Current	0-3A	0-3A	0-3A	0-3A	0-3A	0-3A	0-3A	0-3A	0-3A/0-1A	0-1A		
	Power	96W	96W	15W	96W	96W	15W	96W	96W	15W/10W	5W		
Load Regulation ± (% Output + Bias)	Voltage	≤0.01%+3mV											
	Current	≤0.2%+3mA											
Power regulation ± (% Output + Bias)	Voltage	≤0.01%+3mV											
	Current	≤0.2%+3mA											
Programming resolution	Voltage	10mV			1mV								
	Current	10mA			1mA								
Read-back value resolution	Voltage	10mV			1mV								
	Current	10mA			1mA								
Programming Accuracy (25°C±5°C)	Voltage	±(0.1% of reading + 30mV)			±(0.02% of reading + 6mV)								
	Current	±(0.5% of reading + 30mA)			≤0.2% of reading +6mA								
Read-back value Accuracy (25°C±5°C)	Voltage	±(0.1% of reading + 30mV)			±(0.02% of reading + 6mV)								
	Current	±(0.5% of reading + 30mA)			≤0.2% of reading +6mA								
Ripple and Noise (20Hz-20MHz)	Voltage(Vp-p)	≤3mVp-p											
	Voltage (rms)	≤1mVrms											
	Current	≤3mArms											
Series Programming Accuracy	Voltage	±(0.1% of reading + 30mV)			±(0.03% of reading + 10mV)								
	Current	±(0.5% of reading + 30mA)			≤0.3% of reading +10mA								
Series Read-back value Accuracy	Voltage	±(0.1% of reading + 30mV)			±(0.03% of reading + 10mV)								
	Current	±(0.5% of reading + 30mA)			≤0.3% of reading +10mA								
Parallel Programming Accuracy	Voltage	±(0.1% of reading + 30mV)			±(0.03% of reading + 10mV)								
	Current	±(0.5% of reading + 30mA)			≤0.3% of reading +10mA								
Parallel Read-back value Accuracy	Voltage	±(0.1% of reading + 30mV)			±(0.03% of reading + 10mV)								
	Current	±(0.5% of reading + 30mA)			≤0.3% of reading +10mA								
Memory	Call back Memory	5 Groups and 1 group of automatic memory when power off.											
	Function	List the output duration of each shift											
Timer	Time setting	0.1s-99999s											
	Resolution	0.1s											
Working Power	Voltage	220V(1±10%)											
	Frequency	50Hz (1±5%)											
Ambient temperature and humidity	Normal Work	0°C- 40°C, humidity: < 90%RH											
	Reference Work	20°C±8°C, humidity: < 80%RH											
	Transport Environment	0°C- 55°C, humidity: < 93%RH											
Size and weight	Warm up time	More than 20 Minutes											
	Size (W×H×D) mm	215×133×268			Weight (kg)	4.7	4.7	6.4					



TH6420 Series

TH6422

Rack mount (mm) : 215(W)×133(H)×268(D)  
Net weight: 4.7kg

TH6423/TH6422A

Rack mount (mm) : 215(W)×133(H)×268(D)  
Net weight: 6.3kg

# Power Electric Tester

## III. TH6430 Series Multi-Channel Programmable Linear Source-Load Integrated Power

NEW

### Features

- 4.3-inch 480x272 dot matrix graphic LCD display
- Humanized operation interface, easy to operate
- Four-channel power output, two-channel load input
- Setting resolution: 1mV/0.1mA, readback resolution: 0.1mV/0.1mA
- DC power output: CH1, CH2, CH3, CH4
- CH1+CH2 support series-parallel outputs
- DC electronic load: CH1, CH2
- Sequential output of channels: delay time can be set for each channel
- Three-channel model supports USB (TYPE-A) output
- Programmable sequence: CH1 and CH2 can realize 100 sets of programmable sequence outputs and pull loads.
- Protection: over-voltage (OVP), over-current (OCP), over-power (OPP)
- Recording: U disk to realize real-time sampling data recording and uploading
- Communication: RS232, GPIB, USB-CDC, USB-TMC, LAN
- I/O: 5 groups of Control I/O ports on the rear panel can realize various function control.



RS232	GPIB	LAN	USB HOST	USB DEVICE
standard	standard	standard	standard	standard

Dimension(mm): 215(W)×125(H)×290(D)

Weight: 8kg

### Application

- R&D and design verification general test
- Production line bench general test, repair
- Automation equipment integration testing
- Teaching laboratory

### Specifications

Model	TH6434				TH6433				TH6432		TH6431	
Output	4				3				2		1	
Power Mode												
Rated output (0°C-40°C)	Channel	CH1	CH2	CH3	CH4	CH1	CH2	CH3 (USB)	CH1	CH2	CH1	
Voltage	0-32V	0-32V	0-5V	0-15V	0-32V	0-32V	1.8V/2.5V/3.3V/5.0V	0-32V	0-32V	0-32V	0-32V	
Current	0-3A	0-3A	0-1A	0-1A	0-3A	0-3A	0-3A	0-3A	0-3A	0-3A	0-6A	
Serial	Voltage	0-64V	-----	0-64V	-----	0-64V	-----	0-64V	-----	0-64V	-----	
Current	0-3A	-----	0-3A	-----	0-3A	-----	0-3A	-----	0-3A	-----	0-3A	
Parallel	Voltage	0-32V	-----	0-32V	-----	0-32V	-----	0-32V	-----	0-32V	-----	
Current	0-6A	-----	0-6A	-----	0-6A	-----	0-6A	-----	0-6A	-----	0-6A	
Load Regulation	Voltage	0.006%+3mV				-----	-----	0.006%+3mV				
Current	0.01%+3mA				-----	-----	-----	0.01%+3mA				
Power Regulation	Voltage	0.006%+3mV				-----	-----	0.006%+3mV				
Current	0.01%+3mA				-----	-----	-----	0.01%+3mA				
Series Regulation	Linear	0.01%+5mV				-----	-----	0.01%+5mV				
Load	100mV				-----	-----	-----	100mV				
Parallel Regulation	Linear	0.01%+3mV				-----	-----	0.01%+3mV				
Load	0.01%+3mV				-----	-----	-----	0.01%+3mV				
Setting resolution	Voltage	1mV				-----	-----	1mV				
Current	0.1mA				-----	-----	-----	0.1mA				
readback resolution	Voltage	0.1mV				-----	-----	0.1mV				
Current	0.1mA				-----	-----	-----	0.1mA				
Accuracy (25°C±5°C)	Voltage	0.03%+10mV				-----	-----	0.03%+10mV				
Current	0.3%+10mA				-----	-----	-----	0.3%+10mA				
Ripple and Noise (20Hz-20MHz)	Voltage	1mVrms				-----	-----	1mVrms				
Current	2mArms				-----	-----	-----	2mArms				
recovery time	50μs (50%-100% LOAD) Time for recovery to within 75mv											

# Power Electric Tester

## III. TH6430 Series Multi-Channel Programmable Linear Source-Load Integrated Power

### Specifications

load mode							
CC	Range	0-3A	-----	0-3A	-----	0-3A	0-6A
	Resolution	1mA	-----	1mA	-----	1mA	1mA
CV	Range	1-32V	-----	1-32V	-----	1-32V	1-32V
	Resolution	10mV	-----	10mV	-----	10mV	10mV
CR	Range	1-1000Ω	-----	1-1000Ω	-----	1-1000Ω	1-1000Ω
	Resolution	1Ω	-----	1Ω	-----	1Ω	1Ω
CW	Range	0-50W	-----	0-50W	-----	0-50W	0-100W
	Resolution	0.01W	-----	0.01W	-----	0.01W	0.01W
Additional Indicators							
Sequence (LIST) CH1 and CH2 only	Quantity	100 groups					
	Formwork	Sine, triangle, step, exponential, logarithmic, customized					
	Cycle	001-100/finite					
Time-delay Output	Channel	CH1,CH2,CH3,CH4					
	Enable	0.1-100s, Output pre-start delay					
	Disable	0.1-100s, Output off pre-delay					
	Fixed time	0.1s~360000sOutput operating hours					
Data Recording	Channel	CH1,CH2,CH3,CH4					
	Interval	0.1-100s					
	No. of groups	100-1000					
	Method	Single, continuous					
Storage	Internal	10 groups of setup files					
	External	Supports U disk for storing setup files and recording data					
Interfaces & Protocols	Interface	RS232C,USB HOST,USB DEVICE,LAN,GPIB,Control I/O					
	Protocol	SCPI					
Working Environment	Temperature	0°C- 40°C					
	Humidity	≤75%RH (Operation) , ≤85%RH (Storage)					
Power Supply	Voltage	110/220V (±10%)					
	Frequency	50Hz/60Hz					
	Power	≤130VA					
Dimension (W*H*D) mm		215x125x290					
Weight		Approx. 8kg					

# Power Electric Tester

## III. TH6400 Series DC Power Supply

### Features

- Fresh and simple system settings with Chinese and English operation interfaces
- High resolution: 24-bit color 4.3-inch TFTLCD, resolution: 480 x 272
- Linear design and triple channel output
- High precision and high stability, low ripple and low noise
- 1/2 2U super mini size and output and sampling terminal on the front and rear panel
- Programmable output of voltage and current
- Timing output: time (0.1-99999.9s)
- Three-channel independent adjustment
- Simultaneously display of voltage, current, power and timing output time for three-channel
- Support series, parallel or synchronous output between channels
- Use rotary knob and numeric keyboard to set the voltage, current and output time
- Remote measurement function, compensation for line voltage drop
- Output control switch
- Fully isolated circuit and support positive and negative reverse connection
- Copy screen function
- Over voltage protection
- Intelligent temperature control fan
- Support standard SCPI communication protocol
- Upgrade instrument firmware via USB flash
- Software monitoring via computer



CE

RS232	USB HOST	USB DEVICE	GPIB
standard	standard	standard	option

(TH6402A only USB HOST )

### TH6402

Rack mount (mm): 215(W) x 88(H) x 457(D)  
Dimension (mm): 235(W) x 105(H) x487(D)  
Net weight: 13kg

### Application

- R & D and design verification common test
- Production line table routine testing and maintenance
- Automated device integration testing
- Solar photovoltaic simulation test
- New power car simulation test
- Teaching laboratory

### Specifications

Model	TH6402A			TH6402			TH6412			TH6413														
Rated output (0°C-40°C)	Channel/Range	Range1	Range2	Range3	Range1	Range2	Range3	Range1	Range2	Range3	Range1	Range2												
	Voltage	0-30V	0-5V	0-30V	0-6V	0-30V	0-6V	0-60V	0-6V	0-6V	0-6V	0-6V												
	Current	0-3A	0-3A	0-3A	0-5A	0-6A	0-6A	0-5A	0-3A	0-5A	0-5A	0-5A												
	Power	90W	15W	90W	30W	180W	180W	30W	180W	30W	30W	30W												
Load regulation ± (% Output + Bias)	Voltage	≤0.01% + 3 mV			≤0.01% + 3 mV																			
	Current	≤0.1% + 3 mA			≤0.01% + 3 mA																			
Power regulation ± (% Output + Bias)	Voltage	≤0.01% + 3 mV			≤0.01% + 3 mV																			
	Current	≤0.1% + 3 mA			≤0.01% + 3 mA																			
Programming resolution	Voltage	10mV			1mV																			
	Current	1mA			0.1mA																			
Read-back value resolution	Voltage	10mV			1mV																			
	Current	1mA			0.1mA																			
Year accuracy (25°C± 5°C) ± (% Reading + Bias)	Programming	Voltage	≤0.05% + 20 mV			≤0.03% + 10 mV																		
	Current	≤0.2%+5mA			≤0.1%+5mA			≤0.1%+8mA			≤0.1%+5mA													
	Read-back	Voltage	≤0.05% + 20 mV			≤0.03% + 10 mV																		
	Current	≤0.2%+5mA			≤0.1%+5mA			≤0.1%+8mA			≤0.1%+5mA													
Ripple and Noise (20Hz-20MHz)	Normal mode voltage		≤1mVrms/ 3mVp-p				≤1mVrms / 4mVp-p																	
	Normal mode current		≤3mA rms				≤5mA rms			≤4mA rms		≤5mA rms												
	Common mode current		-----																					
Series and parallel set value accuracy	Voltage		≤0.02% + 5 mV								≤0.02% + 10mV													
	Current		≤0.1% + 20mA			≤0.1% + 30mA			≤0.1% + 10mA															
Timer		0.1 ~ 99999.9 seconds																						
Memory		40 groups of settings files / channels																						

# Power Electric Tester

## III. TH6402B Quadruple Programmable DC Power Supply



### Features

- Fresh and simple system settings with Chinese and English operation interfaces
- High resolution: 24-bit color 4.3-inch TFTLCD, resolution: 480 x 272
- Linear design and four channel output
- High precision and high stability, low ripple and low noise
- 1/2 2U super mini size and output and sampling terminal on the front and rear panel (The channel only supports front panel output)
- Programmable output of voltage and current
- Timing output: time (0.1-99999.9s)
- Four-channel independent adjustment
- Simultaneously display of voltage, current, power and timing output time for four-channel
- Support series, parallel or synchronous output between channels
- Use rotary knob and numeric keyboard to set the voltage, current and output time
- Remote measurement function, compensation for line voltage drop
- Output control switch
- Fully isolated circuit and support positive and negative reverse connection
- Copy screen function
- Over voltage protection
- Intelligent temperature control fan
- Support standard SCPI communication protocol
- Upgrade instrument firmware via USB HOST
- Software monitoring via computer



### TH6402B

Rack mount (mm): 215(W) x 88(H) x 473(D)  
Dimension (mm): 235(W) x 111(H) x501(D)  
Net weight: 12kg

### Application

- R & D and design verification common test
- Production line table routine testing and maintenance
- Automated device integration testing
- Solar photovoltaic simulation test
- New power car simulation test
- Teaching laboratory

### Specifications

Model	TH6402B					
Rated output (0°C- 40°C)	Channel/Range	Channel1	Channel2	Channel3	Channel4	
	Voltage	0-30V		0-10V	0-5V	
	Current	0-3A		0-3A	0-1A	
	Power	90W		30W	5W	
Load regulation ± (% Output + Bias)	Voltage	≤0.01% + 3 mV				
	Current	≤0.01% + 3 mA				
Power regulation ± (% Output + Bias)	Voltage	≤0.01% + 3 mV				
	Current	≤0.01% + 3 mA				
Programming resolution	Voltage	1mV				
	Current	0.1mA				
Read-back value resolution	Voltage	1mV				
	Current	0.1mA				
Year accuracy (25°C± 5°C) ± (% Reading + Bias)	Programming	Voltage	≤0.1% + 20 mV			
	Current	≤0.2%+5mA				
	Read-back	Voltage	≤0.1% + 20 mV			
		Current	≤0.2%+5mA			
Ripple and Noise (20Hz-20MHz)	Normal mode voltage	≤1mVrms/ 3mVp-p				
	Normal mode current	≤3mA rms				
Series and parallel set value accuracy	Voltage	≤0.02% + 10 mV				
	Current	≤0.2% + 20 mA				
Timer	0.1 ~ 99999.9 seconds					
Memory	40 groups of settings files / channels					

# Power Electric Tester

## III. TH6500 Series DC Power Supply

### Features

- 24-bit color 4.3-inch color LCD display
- LCD resolution 480\*272
- Numeric keypad operation
- Low ripple and low noise
- Intelligent fan control to save energy and reduce noise
- Software monitoring via computer
- Editable voltage and current output waveform with time (resolution 1ms) (LBT mode)
- The power output can be turned on and off by an external signal
- The knob can be used to coarsely adjust and fine tune the voltage and current values.
- High accuracy and resolution: 0.1mV/0.01mA
- Timing output time can be set (0.01-9999.99S)
- Screen information can be stored in the USB flash drive
- Chinese and English user interface
- Flexible and convenient file operating system
- Built-in 5 1/2 digital milliohm meter
- Automatic upgrade of instrument operating software via USB HOST
- Handler interface for online operations
- RS232, USB HOST, USB Device, GPIB can easily realize the data communication with PC and remote control of the instrument
- Comes with hardware OVP, OCP protection (OCP is software protection)
- Front panel and rear panel with output and sampling terminals, voltage and resistance measuring terminal
- Support standard SCPI and MODBUS communication protocols



TH6513

Rack mount (mm): 215(W) x 88(H) x 412(D)  
Dimension (mm): 235(W) x 111(H) x440(D)  
Net weight: 8.1kg



### Application

- R & D and design verification common test
- Production line table routine testing and maintenance
- Automated device integration testing
- Solar photovoltaic simulation test
- New power car simulation test
- Teaching laboratory

### Specifications

Mode	TH6501	TH6502	TH6503	TH6511	TH6512	TH6513		
Rated output	Voltage	0-20V	0-32V	0-72V	0-20V	0-32V		
	Current	0-5A	0-3A	0-1.5A	0-10A	0-6A		
	Power	100W	96W	108W	200W	192W		
Load regulation	Voltage	$\leq 0.01\%+2mV$						
	Current	$\leq 0.05\%+1.5mA$						
Power regulation	Voltage	$\leq 0.01\%+1mV$						
	Current	$\leq 0.05\%+1mA$						
Set value resolution	Voltage	1mV						
	Current	0.1mA						
Read-back resolution	Voltage	0.1mV						
	Current	0.01mA						
Year set accuracy (25°C±5°C)	Voltage	$\leq 0.03\%+3mV$						
	Current	$\leq 0.05\%+2mA$						
Year read-back accuracy(25°C±5°C)	Voltage	$\leq 0.02\%+3mV$						
	Current	$\leq 0.05\%+2mA$						
Ripple and Noise (20Hz-20MHz)	Differential mode voltage	$\leq 3mVp-p$ and $1mVrms$			$\leq 4mVp-p$ and $1mVrms$			
	Differential mode current	$<3mA rms$			$<4mA rms$			
Dynamic recovery time (50%-100% LOAD)		<200us						
Restore to time within 75mv		<200us						
Rise time	10%-90%	<20ms						
Fall time	90%-10%	<200ms	<250ms	<150ms	<200ms	<250ms		
Overvoltage protection	Range (Typical)	1-19V	1-31V	1-71V	1-19V	1-31V		
	Accuracy (typical)	$\pm (\text{set value} * 0.5\%+0.5V)$						
	Response time (typical)	<10ms						
DVM(DC)	Display value accuracy	$\pm 0.02\%+10mv$						
	Display resolution	0.1mv						
	Input differential mode voltage range	0-40Vpk						
	Input common mode voltage range	0-30Vpk						

# Power Electric Tester

## III. TH6600 Series Programmable Bidirectional DC Power Supply

### Features

NEW

- High power density: 3U high single machine power 5kW/10kW/15kW
- Master-slave mode parallel, expandable to 480kW
- Bidirectional power supply, integrating laboratory power supply and regenerative electronic load
- High accuracy and high resolution, low ripple and low noise
- Power/load mode supports CV, CC, CR, CP automatic conversion
- Built-in function generator: built-in sine, triangle, arbitrary wave and other waveforms, support custom waveforms
- 0.99 power factor
- 7-inch 24-bit color TFT LCD capacitive touch screen, 800×480 resolution
- Linux operating system
- Battery charge and discharge test: battery, supercapacitor charge and discharge and capacity test
- Photovoltaic simulation test: simple PV test, MPPT maximum power point tracking
- Data recording function: real-time recording of voltage, current and other information, and save to USB flash drive
- USB flash drive upgrade: update the instrument system through USB flash drive
- Support knob and cursor to accurately adjust the value
- Intelligent fan control, save energy and reduce noise
- Timing function: timing the instrument output
- Analog interface: for external analog control
- Protection: built-in hardware OVP, OCP, OPP and other protections, customizable alarm events
- Support SCPI and MODBUS protocols



RS232	GPIB	LAN	USB HOST	USB DEVICE
standard	standard	standard	standard	standard

### TH6600 Series

Dimension(mm): 215(W)×125(H)×290(D)

Weight: 32.5kg

### Application

- R&D and design verification general test
- New energy: solar cells, new power vehicles, electric bicycles
- Routine testing and maintenance of production line benches
- Automation equipment integration testing
- Solar PV simulation test
- Teaching laboratories
- LED testing
- Automotive wiring harness reliability test
- Supercapacitor charging, discharging and capacity test

# Power Electric Tester

## III. TH6600 Series Programmable Bidirectional DC Power Supply

### Specifications

Model		TH6680-120-05	TH6680-240-10	TH6680-360-15
Rated Output (Power Mode)	Power	0-5kW	0-10kW	0-15kW
	Voltage	0-80V	0-80V	0-80V
	Current	0-120A	0-240A	0-360A
	Internal Resistance	0.02-25Ω	0.01-13Ω	0.006-10Ω
Rated Input (Load Mode)	Power	0-5kW	0-10kW	0-15kW
	Voltage	0-80V	0-80V	0-80V
	Current	0-120A	0-240A	0-360A
	Internal Resistance	0.02-25Ω	0.01-13Ω	0.006-10Ω
Load Regulation *1	Voltage	≤0.05%FS	≤0.05%FS	≤0.05%FS
	Current	≤0.15%FS	≤0.15%FS	≤0.15%FS
	Power	≤0.75%FS	≤0.75%FS	≤0.75%FS
Power Regulation *2	Voltage	≤0.02%FS	≤0.02%FS	≤0.02%FS
	Current	≤0.05%FS	≤0.05%FS	≤0.05%FS
	Power	≤0.05%FS	≤0.05%FS	≤0.05%FS
Setting Resolution	Voltage	10mV	10mV	10mV
	Current	0.1A	0.1A	0.1A
	Power	1W	1W	1W
	Internal Resistance	0.001Ω	0.001Ω	0.001Ω
Readback Resolution	Voltage	10mV	10mV	10mV
	Current	0.1A	0.1A	0.1A
	Power	1W	1W	1W
	Internal Resistance	0.001Ω	0.001Ω	0.001Ω
Setpoint Accuracy 12Months (25°C±5°C)	Voltage	≤0.1%FS	≤0.1%FS	≤0.1%FS
	Current	≤0.2%FS	≤0.2%FS	≤0.2%FS
	Power	≤1%FS	≤1%FS	≤1%FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current		
Readback Accuracy 12Months (25°C±5°C)	Voltage	≤0.2%FS	≤0.2%FS	≤0.2%FS
	Current	≤0.2%FS	≤0.2%FS	≤0.2%FS
	Power	≤1%FS	≤1%FS	≤1%FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current		
Ripple & Noise (20Hz-2MHz)	Differential Mode Voltage	≤200mVp-p and 16mVrms	≤320mVp-p and 25mVrms	≤320mVp-p and 25mVrms
	Differential Mode Current	≤80mA rms	≤160mA rms	≤240mA rms
Dynamic Recovery Time (50%-100%Load)		≤1.5ms		
Remote Sensor Compensation		≤0.5%FS		
Power Supply Conversion Efficiency		≤93%		
Energy Feedback Efficiency		≤93%		
Volume & Weight	Rack Mount (WxHxD) mm	430×133×703.5		
	Overall Dimension (WxHxD)mm	483×133×793.5		
	Weight (net weight)	18.5kg	25.5kg	32.5kg
Power Supply		342VAC-528VAC, 44-66Hz		

\*1 Load regulation ratio at load from 0-100% when used as a power supply.

\*2 Power regulation ratio at power supply from 0-100% when used as a load.

# Power Electric Tester

## III. TH6600 Series Programmable Bidirectional DC Power Supply

### Specifications

Model		TH66200-70-05	TH66200-140-10	TH66200-210-15
Rated Output (Power Mode)	Power	0-5kW	0-10kW	0-15kW
	Voltage	0-200V	0-200V	0-200V
	Current	0-70A	0-140A	0-210A
	Internal Resistance	0.1-150Ω	0.05-75Ω	0.033-50Ω
Rated Input (Load Mode)	Power	0-5kW	0-10kW	0-15kW
	Voltage	0-200V	0-200V	0-200V
	Current	0-70A	0-140A	0-210A
	Internal Resistance	0.1-150Ω	0.05-75Ω	0.033-50Ω
Load Regulation*1	Voltage	≤0.05% FS	≤0.05% FS	≤0.05% FS
	Current	≤0.15% FS	≤0.15% FS	≤0.15% FS
	Power	≤0.75% FS	≤0.75% FS	≤0.75% FS
Power Regulation*2	Voltage	≤0.02% FS	≤0.02% FS	≤0.02% FS
	Current	≤0.05% FS	≤0.05% FS	≤0.05% FS
	Power	≤0.05% FS	≤0.05% FS	≤0.05% FS
Minimum resolution of setpoint	Voltage	10mV	10mV	10mV
	Current	0.01A	0.01A	0.01A
	Power	1W	1W	1W
	Internal Resistance	0.01Ω	0.01Ω	0.01Ω
Minimum resolution of readback value	Voltage	10mV	10mV	10mV
	Current	0.01A	0.01A	0.01A
	Power	1W	1W	1W
	Internal Resistance	0.0001Ω	0.0001Ω	0.0001Ω
Setpoint accuracy 12Months (25°C±5°C)	Voltage	≤0.1% FS	≤0.1% FS	≤0.1% FS
	Current	≤0.2% FS	≤0.2% FS	≤0.2% FS
	Power	≤1% FS	≤1% FS	≤1% FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current		
Readback accuracy 12Months (25°C±5°C)	Voltage	≤0.1% FS	≤0.1% FS	≤0.1% FS
	Current	≤0.2% FS	≤0.2% FS	≤0.2% FS
	Power	≤1% FS	≤1% FS	≤1% FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current		
Ripple & Noise (20Hz-2MHz)	Differential Mode Voltage	≤320mVp-p and 45mVrms	≤320mVp-p and 45mVrms	≤320mVp-p and 45mVrms
	Differential Mode Current	≤22mA rms	≤44mA rms	≤66mA rms
Dynamic recovery time (50%-100% Load)		≤1.5ms		
Remote Sensor Compensation		≤5% FS		
Power Supply Conversion Efficiency		≤93%		
Energy Feedback Efficiency		≤93%		
Volume & Weight	Rack Mount(WxHxD)mm	430×133×703.5		
	Overall Dimension (WxHxD)mm	483×133×793.5		
	Weight (net weight)	18.5kg	25.5kg	32.5kg
Power Supply		342VAC-528VAC, 44-66Hz		

# Power Electric Tester

## III. TH6600 Series Programmable Bidirectional DC Power Supply

### Specifications

Model		TH66500-30-05	TH66500-60-10	TH66500-90-15
Rated Output (Power Mode)	Power	0-5kW	0-10kW	0-15kW
	Voltage	0-500V	0-500V	0-200V
	Current	0-30A	0-60A	0-90A
	Internal Resistance	0.5-1000Ω	0.25-500Ω	0.16-340Ω
Rated Input (Load Mode)	Power	0-5kW	0-10kW	0-15kW
	Voltage	0-500V	0-500V	0-200V
	Current	0-30A	0-60A	0-90A
	Internal Resistance	0.5-1000Ω	0.25-500Ω	0.16-340Ω
Load Regulation*1	Voltage	≤0.05% FS	≤0.05% FS	≤0.05% FS
	Current	≤0.15% FS	≤0.15% FS	≤0.15% FS
	Power	≤0.75% FS	≤0.75% FS	≤0.75% FS
Power Regulation*2	Voltage	≤0.02% FS	≤0.02% FS	≤0.02% FS
	Current	≤0.05% FS	≤0.05% FS	≤0.05% FS
	Power	≤0.05% FS	≤0.05% FS	≤0.05% FS
Minimum resolution of setpoint	Voltage	10mV	10mV	10mV
	Current	0.01A	0.01A	0.01A
	Power	1W	1W	1W
	Internal Resistance	0.01Ω	0.01Ω	0.01Ω
Minimum resolution of readback value	Voltage	10mV	10mV	10mV
	Current	0.01A	0.01A	0.01A
	Power	1W	1W	1W
	Internal Resistance	0.0001Ω	0.0001Ω	0.0001Ω
Setpoint accuracy 12Months (25°C±5°C)	Voltage	≤0.1% FS	≤0.1% FS	≤0.1% FS
	Current	≤0.2% FS	≤0.2% FS	≤0.2% FS
	Power	≤1% FS	≤1% FS	≤1% FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current		
Readback accuracy 12Months (25°C±5°C)	Voltage	≤0.1% FS	≤0.1% FS	≤0.1% FS
	Current	≤0.2% FS	≤0.2% FS	≤0.2% FS
	Power	≤1% FS	≤1% FS	≤1% FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current		
Ripple & Noise (20Hz-2MHz)	Differential Mode Voltage	≤350mVp-p and 70mVrms	≤350mVp-p and 70mVrms	≤350mVp-p and 70mVrms
	Differential Mode Current	≤16mA rms	≤32mA rms	≤48mA rms
Dynamic recovery time (50%-100%Load)		≤1.5ms		
Remote Sensor Compensation		≤5%		
Power Supply Conversion Efficiency		≤93%		
Energy Feedback Efficiency		≤93%		
Volume & Weight	Rack Mount (WxHxD)mm	430×133×703.5		
	Overall Dimension (WxHxD)mm	483×133×793.5		
	Weight (net weight)	18.5kg	25.5kg	32.5kg
Power Supply		342VAC-528VAC, 44-66Hz		

# Power Electric Tester

## III. TH6600 Series Programmable Bidirectional DC Power Supply

### Specifications

Model		TH66750-20-05	TH66750-40-10	TH66750-60-15
Rated Output (Power Mode)	Power	0-5kW	0-10kW	0-15kW
	Voltage	0-750V	0-750V	0-750V
	Current	0-20A	0-40A	0-60A
	Internal Resistance	1.2-2200Ω	0.6-1100Ω	0.4-740Ω
Rated Input (Load Mode)	Power	0-5kW	0-10kW	0-15kW
	Voltage	0-750V	0-750V	0-750V
	Current	0-20A	0-40A	0-60A
	Internal Resistance	1.2-2200Ω	0.6-1100Ω	0.4-740Ω
Load Regulation*1	Voltage	≤0.05% FS	≤0.05% FS	≤0.05% FS
	Current	≤0.15% FS	≤0.15% FS	≤0.15% FS
	Power	≤0.75% FS	≤0.75% FS	≤0.75% FS
Power Regulation*2	Voltage	≤0.02% FS	≤0.02% FS	≤0.02% FS
	Current	≤0.05% FS	≤0.05% FS	≤0.05% FS
	Power	≤0.05% FS	≤0.05% FS	≤0.05% FS
Minimum resolution of setpoint	Voltage	10mV	10mV	10mV
	Current	0.01A	0.01A	0.01A
	Power	1W	1W	1W
	Internal Resistance	0.01Ω	0.01Ω	0.01Ω
Minimum resolution of readback value	Voltage	10mV	10mV	10mV
	Current	0.01A	0.01A	0.01A
	Power	1W	1W	1W
	Internal Resistance	0.0001Ω	0.0001Ω	0.0001Ω
Setpoint accuracy 12Months (25°C±5°C)	Voltage	≤0.1% FS	≤0.1% FS	≤0.1% FS
	Current	≤0.2% FS	≤0.2% FS	≤0.2% FS
	Power	≤1% FS	≤1% FS	≤1% FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current		
Readback accuracy 12Months (25°C±5°C)	Voltage	≤0.1% FS	≤0.1% FS	≤0.1% FS
	Current	≤0.2% FS	≤0.2% FS	≤0.2% FS
	Power	≤1% FS	≤1% FS	≤1% FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current		
Ripple & Noise (20Hz-2MHz)	Differential Mode Voltage	≤800mVp-p and 200mVrms	≤800mVp-p and 200mVrms	≤800mVp-p and 200mVrms
	Differential Mode Current	≤16mA rms	≤32mA rms	≤48mA rms
Dynamic recovery time (50%-100%Load)		≤1.5ms		
Remote Sensor Compensation		≤5%		
Power Supply Conversion Efficiency		≤93%		
Energy Feedback Efficiency		≤93%		
Volume & Weight	Rack Mount(WxHxD)mm	430×133×703.5		
	Overall Dimension (WxHxD)mm	483×133×793.5		
	Weight (net weight)	18.5kg	25.5kg	32.5kg
Power Supply		342VAC-528VAC, 44-66Hz		

# Power Electric Tester

## III. TH6600 Series Programmable Bidirectional DC Power Supply

### Specifications

Model		TH661000-40-15
Rated Output (Power Mode)	Power	0-15kW
	Voltage	0-1000V
	Current	0-40A
	Internal Resistance	0.8-1300Ω
Rated Input (Load Mode)	Power	0-15kW
	Voltage	0-1000V
	Current	0-40A
	Internal Resistance	0.8-1300Ω
Load Regulation*1	Voltage	≤0.05% FS
	Current	≤0.15% FS
	Power	≤0.75% FS
Power Regulation*2	Voltage	≤0.02% FS
	Current	≤0.05% FS
	Power	≤0.05% FS
Minimum resolution of setpoint	Voltage	10mV
	Current	0.01A
	Power	1W
	Internal Resistance	0.01Ω
Minimum resolution of readback value	Voltage	10mV
	Current	0.01A
	Power	1W
	Internal Resistance	0.0001Ω
Setpoint accuracy 12Months (25°C±5°C)	Voltage	≤0.1% FS
	Current	≤0.2% FS
	Power	≤1% FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current
Readback accuracy 12Months (25°C±5°C)	Voltage	≤0.1% FS
	Current	≤0.2% FS
	Power	≤1% FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current
Ripple & Noise (20Hz-2MHz)	Differential Mode Voltage	≤1600mVp-p and 300mVrms
	Differential Mode Current	≤16mArms
Dynamic recovery time (50%-100%Load)		≤1.5ms
Remote Sensor Compensation		≤5%
Power Supply Conversion Efficiency		≤93%
Energy Feedback Efficiency		≤93%
Volume & Weight	Rack Mount (WxHxD)mm	430×133×703.5
	Overall Dimension (WxHxD)mm	483×133×793.5
	Weight (net weight)	32.5kg
Power Supply		342VAC-528VAC, 44-66Hz

# Power Electric Tester

## III. TH6600P Series Programmable DC Power Supply

### Features

- High power density: 3U high single machine power 5kW/10kW/15kW
- Master-slave mode parallel, expandable to 480kW
- High accuracy and high resolution, low ripple and low noise
- Power mode supports CV, CC, CR, CP automatic conversion
- Built-in function generator: built-in sine, triangle, arbitrary wave and other waveforms, support custom waveforms
- 0.99 power factor
- 7-inch 24-bit color TFT LCD capacitive touch screen, 800×480 resolution
- Linux operating system
- Data recording function: real-time recording of voltage, current and other information, and save to USB flash drive
- USB flash drive upgrade: update the instrument system through USB flash drive
- Support knob and cursor to accurately adjust the value
- Intelligent fan control, save energy and reduce noise
- Timing function: timing the instrument output
- Analog interface: for external analog control
- Protection: built-in hardware OVP, OCP, OPP and other protections, customizable alarm events
- Support SCPI and MODBUS protocols

NEW



RS232	GPIB	LAN	USB HOST	USB DEVICE
standard	standard	standard	standard	standard

TH6600P Series

Dimension(mm): 215(W)×125(H)×290(D)

Weight: 32.5kg

### Application

- R&D and design verification general test
- New energy: solar cells, new power vehicles, electric bicycles
- Routine testing and maintenance of production line benches
- Automation equipment integration testing
- Solar PV simulation test
- Teaching laboratories
- LED testing
- Automotive harness reliability testing

# Power Electric Tester

## III. TH6600P Series Programmable DC Power Supply

### Specifications

Model		TH6680P-120-05	TH6680P-240-10	TH6680P-360-15
Rated Output (Power Mode)	Power	0-5kW	0-10kW	0-15kW
	Voltage	0-80V	0-80V	0-80V
	Current	0-120A	0-240A	0-360A
	Internal Resistance	0.02-25Ω	0.01-13Ω	0.006-10Ω
Load Regulation *1	Voltage	≤0.05%FS	≤0.05%FS	≤0.05%FS
	Current	≤0.15%FS	≤0.15%FS	≤0.15%FS
	Power	≤0.75%FS	≤0.75%FS	≤0.75%FS
Power Regulation *2	Voltage	≤0.02%FS	≤0.02%FS	≤0.02%FS
	Current	≤0.05%FS	≤0.05%FS	≤0.05%FS
	Power	≤0.05%FS	≤0.05%FS	≤0.05%FS
Setting Resolution	Voltage	10mV	10mV	10mV
	Current	0.1A	0.1A	0.1A
	Power	1W	1W	1W
	Internal Resistance	0.001Ω	0.001Ω	0.001Ω
Readback Resolution	Voltage	10mV	10mV	10mV
	Current	0.1A	0.1A	0.1A
	Power	1W	1W	1W
	Internal Resistance	0.001Ω	0.001Ω	0.001Ω
Setpoint Accuracy 12Months (25°C±5°C)	Voltage	≤0.1%FS	≤0.1%FS	≤0.1%FS
	Current	≤0.2%FS	≤0.2%FS	≤0.2%FS
	Power	≤1%FS	≤1%FS	≤1%FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current		
Readback Accuracy 12Months (25°C±5°C)	Voltage	≤0.2%FS	≤0.2%FS	≤0.2%FS
	Current	≤0.2%FS	≤0.2%FS	≤0.2%FS
	Power	≤1%FS	≤1%FS	≤1%FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current		
Ripple & Noise (20Hz-2MHz)	Differential Mode Voltage	≤200mVp-p and 16mVrms	≤320mVp-p and 25mVrms	≤320mVp-p and 25mVrms
	Differential Mode Current	≤80mA rms	≤160mA rms	≤240mA rms
Dynamic Recovery Time (50%-100%Load)		≤1.5ms		
Remote Sensor Compensation		≤0.5%FS		
Power Supply Conversion Efficiency		≤93%		
Energy Feedback Efficiency		≤93%		
Volume & Weight	Rack Mount (WxHxD) mm	430×133×703.5		
	Overall Dimension (WxHxD)mm	483×133×793.5		
	Weight (net weight)	18.5kg	25.5kg	32.5kg
Power Supply		342VAC-528VAC, 44-66Hz		

# Power Electric Tester

## III. TH6600P Series Programmable DC Power Supply

### Specifications

Model		TH66200P-70-05	TH66200P-140-10	TH66200P-210-15
Rated Output (Power Mode)	Power	0-5kW	0-10kW	0-15kW
	Voltage	0-200V	0-200V	0-200V
	Current	0-70A	0-140A	0-210A
	Internal Resistance	0.1-150Ω	0.05-75Ω	0.033-50Ω
Load Regulation*1	Voltage	≤0.05% FS	≤0.05% FS	≤0.05% FS
	Current	≤0.15% FS	≤0.15% FS	≤0.15% FS
	Power	≤0.75% FS	≤0.75% FS	≤0.75% FS
Power Regulation*2	Voltage	≤0.02% FS	≤0.02% FS	≤0.02% FS
	Current	≤0.05% FS	≤0.05% FS	≤0.05% FS
	Power	≤0.05% FS	≤0.05% FS	≤0.05% FS
Minimum resolution of setpoint	Voltage	10mV	10mV	10mV
	Current	0.01A	0.01A	0.01A
	Power	1W	1W	1W
	Internal Resistance	0.01Ω	0.01Ω	0.01Ω
Minimum resolution of readback value	Voltage	10mV	10mV	10mV
	Current	0.01A	0.01A	0.01A
	Power	1W	1W	1W
	Internal Resistance	0.0001Ω	0.0001Ω	0.0001Ω
Setpoint accuracy 12Months (25°C±5°C)	Voltage	≤0.1% FS	≤0.1% FS	≤0.1% FS
	Current	≤0.2% FS	≤0.2% FS	≤0.2% FS
	Power	≤1% FS	≤1% FS	≤1% FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current		
Readback accuracy 12Months (25°C±5°C)	Voltage	≤0.1% FS	≤0.1% FS	≤0.1% FS
	Current	≤0.2% FS	≤0.2% FS	≤0.2% FS
	Power	≤1% FS	≤1% FS	≤1% FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current		
Ripple & Noise (20Hz-2MHz)	Differential Mode Voltage	≤320mVp-p and 45mVrms	≤320mVp-p and 45mVrms	≤320mVp-p and 45mVrms
	Differential Mode Current	≤22mA rms	≤44mA rms	≤66mA rms
Dynamic recovery time (50%-100% Load)		≤1.5ms		
Remote Sensor Compensation		≤5% FS		
Power Supply Conversion Efficiency		≤93%		
Volume & Weight	Rack Mount(WxHxD)mm	430×133×703.5		
	Overall Dimension (WxHxD)mm	483×133×793.5		
	Weight (net weight)	18.5kg	25.5kg	32.5kg
Power Supply		342VAC-528VAC, 44-66Hz		

# Power Electric Tester

## III. TH6600P Series Programmable DC Power Supply

### Specifications

Model		TH66500P-30-05	TH66500P-60-10	TH66500P-90-15
Rated Output (Power Mode)	Power	0-5kW	0-10kW	0-15kW
	Voltage	0-500V	0-500V	0-200V
	Current	0-30A	0-60A	0-90A
	Internal Resistance	0.5-1000Ω	0.25-500Ω	0.16-340Ω
Load Regulation*1	Voltage	≤0.05% FS	≤0.05% FS	≤0.05% FS
	Current	≤0.15% FS	≤0.15% FS	≤0.15% FS
	Power	≤0.75% FS	≤0.75% FS	≤0.75% FS
Power Regulation*2	Voltage	≤0.02% FS	≤0.02% FS	≤0.02% FS
	Current	≤0.05% FS	≤0.05% FS	≤0.05% FS
	Power	≤0.05% FS	≤0.05% FS	≤0.05% FS
Minimum resolution of setpoint	Voltage	10mV	10mV	10mV
	Current	0.01A	0.01A	0.01A
	Power	1W	1W	1W
	Internal Resistance	0.01Ω	0.01Ω	0.01Ω
Minimum resolution of readback value	Voltage	10mV	10mV	10mV
	Current	0.01A	0.01A	0.01A
	Power	1W	1W	1W
	Internal Resistance	0.0001Ω	0.0001Ω	0.0001Ω
Setpoint accuracy 12Months (25°C±5°C)	Voltage	≤0.1% FS	≤0.1% FS	≤0.1% FS
	Current	≤0.2% FS	≤0.2% FS	≤0.2% FS
	Power	≤1% FS	≤1% FS	≤1% FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current		
Readback accuracy 12Months (25°C±5°C)	Voltage	≤0.1% FS	≤0.1% FS	≤0.1% FS
	Current	≤0.2% FS	≤0.2% FS	≤0.2% FS
	Power	≤1% FS	≤1% FS	≤1% FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current		
Ripple & Noise (20Hz-2MHz)	Differential Mode Voltage	≤350mVp-p and 70mVrms	≤350mVp-p and 70mVrms	≤350mVp-p and 70mVrms
	Differential Mode Current	≤16mA rms	≤32mA rms	≤48mA rms
Dynamic recovery time (50%-100%Load)		≤1.5ms		
Remote Sensor Compensation		≤5%		
Power Supply Conversion Efficiency		≥93%		
Volume & Weight	Rack Mount (WxHxD)mm	430×133×703.5		
	Overall Dimension (WxHxD)mm	483×133×793.5		
	Weight (net weight)	18.5kg	25.5kg	32.5kg
Power Supply		342VAC-528VAC, 44-66Hz		

# Power Electric Tester

## III. TH6600P Series Programmable DC Power Supply

### Specifications

Model		TH66750P-20-05	TH66750P-40-10	TH66750P-60-15
Rated Output (Power Mode)	Power	0-5kW	0-10kW	0-15kW
	Voltage	0-750V	0-750V	0-750V
	Current	0-20A	0-40A	0-60A
	Internal Resistance	1.2-2200Ω	0.6-1100Ω	0.4-740Ω
Load Regulation*1	Voltage	≤0.05% FS	≤0.05% FS	≤0.05% FS
	Current	≤0.15% FS	≤0.15% FS	≤0.15% FS
	Power	≤0.75% FS	≤0.75% FS	≤0.75% FS
Power Regulation*2	Voltage	≤0.02% FS	≤0.02% FS	≤0.02% FS
	Current	≤0.05% FS	≤0.05% FS	≤0.05% FS
	Power	≤0.05% FS	≤0.05% FS	≤0.05% FS
Minimum resolution of setpoint	Voltage	10mV	10mV	10mV
	Current	0.01A	0.01A	0.01A
	Power	1W	1W	1W
	Internal Resistance	0.01Ω	0.01Ω	0.01Ω
Minimum resolution of readback value	Voltage	10mV	10mV	10mV
	Current	0.01A	0.01A	0.01A
	Power	1W	1W	1W
	Internal Resistance	0.0001Ω	0.0001Ω	0.0001Ω
Setpoint accuracy 12Months (25°C±5°C)	Voltage	≤0.1% FS	≤0.1% FS	≤0.1% FS
	Current	≤0.2% FS	≤0.2% FS	≤0.2% FS
	Power	≤1% FS	≤1% FS	≤1% FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current		
Readback accuracy 12Months (25°C±5°C)	Voltage	≤0.1% FS	≤0.1% FS	≤0.1% FS
	Current	≤0.2% FS	≤0.2% FS	≤0.2% FS
	Power	≤1% FS	≤1% FS	≤1% FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current		
Ripple & Noise (20Hz-2MHz)	Differential Mode Voltage	≤800mVp-p and 200mVrms	≤800mVp-p and 200mVrms	≤800mVp-p and 200mVrms
	Differential Mode Current	≤16mA rms	≤32mA rms	≤48mA rms
Dynamic recovery time (50%-100%Load)		≤1.5ms		
Remote Sensor Compensation		≤5%		
Power Supply Conversion Efficiency		≤93%		
Volume & Weight	Rack Mount(WxHxD)mm	430×133×703.5		
	Overall Dimension (WxHxD)mm	483×133×793.5		
	Weight (net weight)	18.5kg	25.5kg	32.5kg
Power Supply		342VAC-528VAC, 44-66Hz		

# Power Electric Tester

## III. TH6600P Series Programmable DC Power Supply

### Specifications

Model		TH661000P-40-15
Rated Output (Power Mode)	Power	0-15kW
	Voltage	0-1000V
	Current	0-40A
	Internal Resistance	0.8-1300Ω
Load Regulation*1	Voltage	≤0.05% FS
	Current	≤0.15% FS
	Power	≤0.75% FS
Power Regulation*2	Voltage	≤0.02% FS
	Current	≤0.05% FS
	Power	≤0.05% FS
Minimum resolution of setpoint	Voltage	10mV
	Current	0.01A
	Power	1W
	Internal Resistance	0.01Ω
Minimum resolution of readback value	Voltage	10mV
	Current	0.01A
	Power	1W
	Internal Resistance	0.0001Ω
Setpoint accuracy 12Months (25°C±5°C)	Voltage	≤0.1% FS
	Current	≤0.2% FS
	Power	≤1% FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current
Readback accuracy 12Months (25°C±5°C)	Voltage	≤0.1% FS
	Current	≤0.2% FS
	Power	≤1% FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current
Ripple & Noise (20Hz-2MHz)	Differential Mode Voltage	≤1600mVp-p and 300mVrms
	Differential Mode Current	≤16mArms
Dynamic recovery time (50%-100%Load)		≤1.5ms
Remote Sensor Compensation		≤5%
Power Supply Conversion Efficiency		≤93%
Volume & Weight	Rack Mount (WxHxD)mm	430×133×703.5
	Overall Dimension (WxHxD)mm	483×133×793.5
	Weight (net weight)	32.5kg
Power Supply		342VAC-528VAC, 44-66Hz

# Power Electric Tester

## III. TH6600L Series Programmable Bidirectional DC Electronic Load

### Features

NEW

- High power density: 3U high single machine power 5kW/10kW/15kW
- Master-slave mode parallel, expandable to 480kW
- High accuracy and high resolution, low ripple and low noise
- Load mode supports CV, CC, CR, CP automatic conversion
- Built-in function generator: built-in sine, triangle, arbitrary wave and other waveforms, support custom waveforms
- 7-inch 24-bit color TFT LCD capacitive touch screen, 800×480 resolution
- Linux operating system
- Photovoltaic simulation test: simple PV test, MPPT maximum power point tracking
- Data recording function: real-time recording of voltage, current and other information, and save to USB flash drive
- USB flash drive upgrade: update the instrument system through USB flash drive
- Support knob and cursor to accurately adjust the value
- Intelligent fan control, save energy and reduce noise
- Timing function: timing the instrument output
- Analog interface: for external analog control
- Protection: built-in hardware OVP, OCP, OPP and other protections, customizable alarm events
- Support SCPI and MODBUS protocols



RS232	GPIB	LAN	USB HOST	USB DEVICE
standard	standard	standard	standard	standard

### TH6600L Series

Dimension(mm): 215(W)×125(H)×290(D)

Weight: 32.5kg

### Application

- R&D and design verification general test
- New energy: solar cells, new power vehicles, electric bicycles
- Routine testing and maintenance of production line benches
- Automation equipment integration testing
- Solar PV simulation test
- Teaching laboratories
- LED testing
- Automotive wiring harness reliability test

# Power Electric Tester

## III. TH6600L Series Programmable Bidirectional DC Electronic Load

### Specifications

Model		TH6680L-120-05	TH6680L-240-10	TH6680L-360-15
Rated Input (Load Mode)	Power	0-5kW	0-10kW	0-15kW
	Voltage	0-80V	0-80V	0-80V
	Current	0-120A	0-240A	0-360A
	Internal Resistance	0.02-25Ω	0.01-13Ω	0.006-10Ω
Setting Resolution	Voltage	10mV	10mV	10mV
	Current	0.1A	0.1A	0.1A
	Power	1W	1W	1W
	Internal Resistance	0.001Ω	0.001Ω	0.001Ω
Readback Resolution	Voltage	10mV	10mV	10mV
	Current	0.1A	0.1A	0.1A
	Power	1W	1W	1W
	Internal Resistance	0.001Ω	0.001Ω	0.001Ω
Setpoint Accuracy 12Months (25°C±5°C)	Voltage	≤0.1%FS	≤0.1%FS	≤0.1%FS
	Current	≤0.2%FS	≤0.2%FS	≤0.2%FS
	Power	≤1%FS	≤1%FS	≤1%FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current		
Readback Accuracy 12Months (25°C±5°C)	Voltage	≤0.2%FS	≤0.2%FS	≤0.2%FS
	Current	≤0.2%FS	≤0.2%FS	≤0.2%FS
	Power	≤1%FS	≤1%FS	≤1%FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current		
Ripple & Noise (20Hz-2MHz)	Differential Mode Voltage	≤200mVp-p and 16mVrms	≤320mVp-p and 25mVrms	≤320mVp-p and 25mVrms
	Differential Mode Current	≤80mA rms	≤160mA rms	≤240mA rms
Remote Sensor Compensation		≤0.5%FS		
Energy Feedback Efficiency		≤93%		
Volume & Weight	Rack Mount (WxHxD) mm	430×133×703.5		
	Overall Dimension (WxHxD)mm	483×133×793.5		
	Weight (net weight)	18.5kg	25.5kg	32.5kg
Power Supply		342VAC-528VAC, 44-66Hz		

# Power Electric Tester

## III. TH6600L Series Programmable Bidirectional DC Electronic Load

### Specifications

Model		TH66200L-70-05	TH66200L-140-10	TH66200L-210-15
Rated Input (Load Mode)	Power	0-5kW	0-10kW	0-15kW
	Voltage	0-200V	0-200V	0-200V
	Current	0-70A	0-140A	0-210A
	Internal Resistance	0.1-150Ω	0.05-75Ω	0.033-50Ω
Minimum resolution of setpoint	Voltage	10mV	10mV	10mV
	Current	0.01A	0.01A	0.01A
	Power	1W	1W	1W
	Internal Resistance	0.01Ω	0.01Ω	0.01Ω
Minimum resolution of readback value	Voltage	10mV	10mV	10mV
	Current	0.01A	0.01A	0.01A
	Power	1W	1W	1W
	Internal Resistance	0.0001Ω	0.0001Ω	0.0001Ω
Setpoint accuracy 12Months (25°C±5°C)	Voltage	≤0.1% FS	≤0.1% FS	≤0.1% FS
	Current	≤0.2% FS	≤0.2% FS	≤0.2% FS
	Power	≤1% FS	≤1% FS	≤1% FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current		
Readback accuracy 12Months (25°C±5°C)	Voltage	≤0.1% FS	≤0.1% FS	≤0.1% FS
	Current	≤0.2% FS	≤0.2% FS	≤0.2% FS
	Power	≤1% FS	≤1% FS	≤1% FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current		
Ripple & Noise (20Hz-2MHz)	Differential Mode Voltage	≤320mVp-p and 45mVrms	≤320mVp-p and 45mVrms	≤320mVp-p and 45mVrms
	Differential Mode Current	≤22mA rms	≤44mA rms	≤66mA rms
Dynamic recovery time (50%-100% Load)		≤1.5ms		
Remote Sensor Compensation		≤5% FS		
Energy Feedback Efficiency		≤93%		
Volume & Weight	Rack Mount(WxHxD)mm	430×133×703.5		
	Overall Dimension (WxHxD)mm	483×133×793.5		
	Weight (net weight)	18.5kg	25.5kg	32.5kg
Power Supply		342VAC-528VAC, 44-66Hz		

# Power Electric Tester

## III. TH6600L Series Programmable Bidirectional DC Electronic Load

### Specifications

Model		TH66500L-30-05	TH66500L-60-10	TH66500L-90-15
Rated Input (Load Mode)	Power	0-5kW	0-10kW	0-15kW
	Voltage	0-500V	0-500V	0-200V
	Current	0-30A	0-60A	0-90A
	Internal Resistance	0.5-1000Ω	0.25-500Ω	0.16-340Ω
Minimum resolution of setpoint	Voltage	10mV	10mV	10mV
	Current	0.01A	0.01A	0.01A
	Power	1W	1W	1W
	Internal Resistance	0.01Ω	0.01Ω	0.01Ω
Minimum resolution of readback value	Voltage	10mV	10mV	10mV
	Current	0.01A	0.01A	0.01A
	Power	1W	1W	1W
	Internal Resistance	0.0001Ω	0.0001Ω	0.0001Ω
Setpoint accuracy 12Months (25°C±5°C)	Voltage	≤0.1% FS	≤0.1% FS	≤0.1% FS
	Current	≤0.2% FS	≤0.2% FS	≤0.2% FS
	Power	≤1% FS	≤1% FS	≤1% FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current		
Readback accuracy 12Months (25°C±5°C)	Voltage	≤0.1% FS	≤0.1% FS	≤0.1% FS
	Current	≤0.2% FS	≤0.2% FS	≤0.2% FS
	Power	≤1% FS	≤1% FS	≤1% FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current		
Ripple & Noise (20Hz-2MHz)	Differential Mode Voltage	≤350mVp-p and 70mVrms	≤350mVp-p and 70mVrms	≤350mVp-p and 70mVrms
	Differential Mode Current	≤16mA rms	≤32mA rms	≤48mA rms
	Remote Sensor Compensation	≤5%		
	Energy Feedback Efficiency	≥93%		
Volume & Weight	Rack Mount (WxHxD)mm	430×133×703.5		
	Overall Dimension (WxHxD)mm	483×133×793.5		
	Weight (net weight)	18.5kg	25.5kg	32.5kg
Power Supply		342VAC-528VAC, 44-66Hz		

# Power Electric Tester

## III. TH6600L Series Programmable Bidirectional DC Electronic Load

### Specifications

Model		TH66750L-20-05	TH66750L-40-10	TH66750L-60-15
Rated Input (Load Mode)	Power	0-5kW	0-10kW	0-15kW
	Voltage	0-750V	0-750V	0-750V
	Current	0-20A	0-40A	0-60A
	Internal Resistance	1.2-2200Ω	0.6-1100Ω	0.4-740Ω
Minimum resolution of setpoint	Voltage	10mV	10mV	10mV
	Current	0.01A	0.01A	0.01A
	Power	1W	1W	1W
	Internal Resistance	0.01Ω	0.01Ω	0.01Ω
Minimum resolution of readback value	Voltage	10mV	10mV	10mV
	Current	0.01A	0.01A	0.01A
	Power	1W	1W	1W
	Internal Resistance	0.0001Ω	0.0001Ω	0.0001Ω
Setpoint accuracy 12Months (25°C±5°C)	Voltage	≤0.1% FS	≤0.1% FS	≤0.1% FS
	Current	≤0.2% FS	≤0.2% FS	≤0.2% FS
	Power	≤1% FS	≤1% FS	≤1% FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current		
Readback accuracy 12Months (25°C±5°C)	Voltage	≤0.1% FS	≤0.1% FS	≤0.1% FS
	Current	≤0.2% FS	≤0.2% FS	≤0.2% FS
	Power	≤1% FS	≤1% FS	≤1% FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current		
Ripple & Noise (20Hz-2MHz)	Differential Mode Voltage	≤800mVp-p and 200mVrms	≤800mVp-p and 200mVrms	≤800mVp-p and 200mVrms
	Differential Mode Current	≤16mA rms	≤32mA rms	≤48mA rms
Remote Sensor Compensation		≤5%		
Energy Feedback Efficiency		≤93%		
Volume & Weight	Rack Mount(WxHxD)mm	430×133×703.5		
	Overall Dimension (WxHxD)mm	483×133×793.5		
	Weight (net weight)	18.5kg	25.5kg	32.5kg
Power Supply		342VAC-528VAC, 44-66Hz		

# Power Electric Tester

## III. TH6600L Series Programmable Bidirectional DC Electronic Load

### Specifications

Model		TH661000L-40-15
Rated Input (Load Mode)	Power	0-15kW
	Voltage	0-1000V
	Current	0-40A
	Internal Resistance	0.8-1300Ω
Minimum resolution of setpoint	Voltage	10mV
	Current	0.01A
	Power	1W
	Internal Resistance	0.01Ω
Minimum resolution of readback value	Voltage	10mV
	Current	0.01A
	Power	1W
	Internal Resistance	0.0001Ω
Setpoint accuracy 12Months (25°C±5°C)	Voltage	≤0.1% FS
	Current	≤0.2% FS
	Power	≤1% FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current
Readback accuracy 12Months (25°C±5°C)	Voltage	≤0.1% FS
	Current	≤0.2% FS
	Power	≤1% FS
	Internal Resistance	≤1% of maximum resistance ±1% of maximum current
Ripple & Noise (20Hz-2MHz)	Differential Mode Voltage	≤1600mVp-p and 300mVrms
	Differential Mode Current	≤16mArms
Remote Sensor Compensation		≤5%
Energy Feedback Efficiency		≤93%
Volume & Weight	Rack Mount (WxDxH)mm	430×133×703.5
	Overall Dimension (WxDxH)mm	483×133×793.5
	Weight (net weight)	32.5kg
Power Supply		342VAC-528VAC, 44-66Hz

# Power Electric Tester

## III. TH6700 Series Programmable Switch DC Power Supply

### Features

- Wide range, and constant power output
- High efficiency and high power density
- Programmable internal resistance, designed for battery output simulation
- Constant current (CC) priority mode, prevent overshoot for LED power supply
- Master-slave series and parallel operation
- 24-bit 4.3-inch color LCD display
- Numeric keyboard operation
- Voltage and current adjustment with knob
- Timed output (0-3600.0s)
- programmable voltage or current rising time
- RS232, USB HOST, USB DEVICE, LAN, and analog control interface



### TH6700

Rack mount (mm): 215(W) x 132(H) x 420(D)  
Dimension (mm): 215(W) x 146(H) x 420(D)

Net weight : 7.5kg

RS232	LAN	Analog Control Interface	USB HOST	USB DEVICE
standard	standard	standard	standard	standard

### Application

- R & D and design verification common test
- Clean energy, solar cells, electric vehicles
- Production line table routine testing and maintenance
- Automated device integration testing
- Solar photovoltaic simulation test
- Teaching laboratory
- LED test

### Specifications

Parameter	TH6711	TH6712	TH6713	TH6721	TH6722	TH6723	TH6731	TH6732	TH6733	TH6741	TH6742	TH6743
Rated Output	Rated Power	360W	720W	1080W	360W	720W	1080W	360W	720W	1080W	360W	720W
	Max Power	Rated output *105%										
	Rated Voltage	0-30V	0-30V	0-30V	0-80V	0-80V	0-80V	0-250V		0-800V		
	Max Voltage	31.5V			84V			262.5V		840V		
	Rated Current	0-33A	0-66A	0-100A	0-12.5A	0-25A	0-37.5A	4.2A	8.4A	12.6A	1.32A	2.64A
Setting	Max Current	36A	72A	108A	13.5A	27A	40.5A	4.5A	9A	13.5A	1.44A	2.88A
	Voltage Range	0-31.5V			0-84V			0-262.5V		0-840V		
Load Regulation	Current Range	0-36A	0-72A	0-108A	0-13.5A	0-27A	0-40.5A	0-4.5A	0-9A	0-13.5A	0-1.44A	0-2.88A
	Voltage	≤20mV			≤45mV			≤130mV		≤405mV		
Line Regulation	Current	≤41mA	≤77mA	≤113mA	≤18.5mA	≤32mA	≤45.5mA	≤9.5mA	≤14mA	≤18.5mA	≤6.44mA	≤7.88mA
	Voltage	≤18mV			≤43mV			≤128mV		≤403mV		
Set Value Resolution	Voltage	10mV						100mV				
	Current	10mA	10mA	100mA	10mA	10mA	10mA	1mA	1mA	10mA	1mA	1mA
Readback Value Resolution	Voltage	10mV						100mV				
	Current	10mA	10mA	100mA	10mA	10mA	10mA	1mA	1mA	10mA	1mA	1mA
Set Value Accuracy (25°C±5°C)	Voltage (>0.1V)	≤0.1%+10mV						≤0.1%+200mV		≤0.1%+400mV		
	Current (>0.1A)	≤0.1%+30mA	≤0.1%+60mA	≤0.1%+100mA	≤0.1%+20mA	≤0.1%+40mA	≤0.1%+50mA	≤0.1%+5mA	≤0.1%+10mA	≤0.1%+20mA	≤0.1%+2mA	≤0.1%+4mA
Readback Value Accuracy (25°C±5°C)	Voltage (>0.1V)	≤0.1%+20mV						≤0.1%+200mV		≤0.1%+400mV		
	Current (>0.1A)	≤0.1%+40mA	≤0.1%+70mA	≤0.1%+100mA	≤0.1%+20mA	≤0.1%+40mA	≤0.1%+50mA	≤0.1%+5mA	≤0.1%+10mA	≤0.1%+20mA	≤0.1%+2mA	≤0.1%+4mA
"Ripple and Noise (20Hz-2MHz)"	Differential Mode Voltage	≤60mVp-p and 7mVrms	≤80mVp-p and 11mVrms	≤100mVp-p and 14mVrms	≤60mVp-p and 7mVrms	≤80mVp-p and 11mVrms	≤100mVp-p and 14mVrms	≤80mVp-p and 15mVrms	≤100mVp-p and 15mVrms	≤120mVp-p and 30mVrms	≤150mVp-p and 30mVrms	≤200mVp-p and 30mVrms
	Differential Mode Current	≤72mA rms	≤144mA rms	≤216mA rms	≤27mA rms	≤54mA rms	≤81mA rms	≤10mA rms	≤20mA rms	≤30mA rms	≤5mA rms	≤10mA rms

### Brief Introduction

■ TH6700 series is a single channel output, wide range programmable switch mode DC power supply, with three output powers of 360W, 720W, and 1080W. Users are able to realize 2 master-slave in series or 3 master-slave in parallel connection, to achieve the requirements of higher voltage and higher current output.

TH6700 series is designed with adjustable slope function that allows users to set the rise time and fall time of current and voltage output. When testing lighting devices and large capacitors, inrush current will be generated as soon as the output is turned on, which severely shortens the lifetime of the tested parts. In this case, the slope function ensures the voltage transmission is smooth and slow at the switching moment which prevents the tested parts from being damaged.

TH6700 series CV/CC priority mode protects the tested parts well. The traditional power supply in CV mode will instantly bring a large surge current to the capacitive load while turning on the output. TH6700 series power supply can run in CC mode at the start of output, which avoids sudden peak current and protects the device from being damaged by surge current.

TH6700 series can simulate battery output with its programmable internal resistor. For instance, a battery supplies power to a device, the applied voltage drops as it passes through the battery's internal resistance. With TH6700 series power supply, the internal resistance can be simulated by setting values, thus causing the output voltage to drop.

TH6700 series provides OVP, OCP, and OTP protection function. Once the output voltage or current exceeds the preset value, the output will be immediately shut down. Once the temperature inside the machine exceeds a certain temperature, the output will be shut down as well.

TH6700 series can be connected to 2 or 4-terminal measurement from the rear panel. The 4-terminal measurement has the remote compensation function, which compensates the pressure drop from the power supply to the parts to be tested.

TH6700 series is equipped with abundant interfaces, such as USB HOST, USB DEVICE, LAN, RS232, and analog control interface. The CV/CC mode controlled by external voltage and external resistance is implemented through analog control interface. In series or in parallel operation is realized through analog control interface. It also supports external voltage or external resistance to control the instrument output.

# Power Electric Tester

## III. TH6700 Series Programmable Switch DC Power Supply

### Specifications

"Dynamic Recovery Time (50%-100% Load) Load Frequency =100Hz"	Recover to 0.1% + 10mV: ≤2ms						≤2ms												
Rise Time (Full Load)	10%-90%	≤50ms						≤100ms		≤150ms									
Rise Time (No Load)	10%-90%	≤50ms						≤100ms		≤150ms									
Drop Time (Full Load)	90%-10%	≤50ms						≤150ms		≤300ms									
Drop Time (No Load)	90%-10%	≤500ms						≤1200ms		≤2000ms									
Timer	Setting Range	0-9999999 (Hour, Minute, Second)						0-9999999 (Hour, Minute, Second)											
Start Delay	Setting Range	0-99.99s						0-99.99s											
Stop Delay	Setting Range	0-99.99s						0-99.99s											
Slope Setting	Voltage Rise	0.01-60V/s			0.1-160V/s			0.1-500V/s			1-1600V/s								
	Voltage Drop	0.01-60V/s			0.1-160V/s			0.1-500V/s			1-1600V/s								
	Current Rise	0.01-72A/s	0.1-144A/s	0.1-216A/s	0.01-27A/s	0.01-54A/s	0.01-81A/s	0.001-9A/s	0.01-18A/s	0.01-27A/s	0.001-2.88A/s	0.001-5.76A/s	0.001-8.64A/s						
	Current Drop	0.01-72A/s	0.1-144A/s	0.1-216A/s	0.01-27A/s	0.01-54A/s	0.01-81A/s	0.001-9A/s	0.01-18A/s	0.01-27A/s	0.001-2.88A/s	0.001-5.76A/s	0.001-8.64A/s						
Analog Internal Resistance	Setting Range	0-0.833Ω	0-0.417Ω	0-0.278Ω	0-5.926Ω	0-2.963Ω	0-1.975Ω	0-55.55Ω	0-27.77Ω	0-18.51Ω	0-555.5Ω	0-277.8Ω	0-185.1Ω						
"External Voltage Control (25°C±5°C)"	CV Accuracy	Rated Output Voltage±0.5%						Rated Output Voltage±0.5%											
	CC Accuracy	Rated Output Current±1%						Rated Output Current±1%											
"External resistance control (25°C±5°C)"	CV Accuracy	Rated Output Voltage±1.5%						Rated Output Voltage±1.5%											
	CC Accuracy	Rated Output Current±1.5%						Rated Output Current±1.5%											
Power Factor	100VAC (Full Load)	0.99						0.99		0.99									
	200VAC (Full Load)	0.97						0.97		0.97									
Efficient	100VAC (Full Load)	75%			76%			77%		78%									
	200VAC (Full Load)	77%			78%			79%		80%									
Master-Slave Control	Master-Slave Parallel	3 Sets including the master tester						3 Sets including the master tester											
	Master-Slave Series	2 Sets including the master tester						Not Available											
Protection	OVP Accuracy	3-33V N/A	3-33V	3-33V	8-88V	8-88V	8-88V	20-275V		20-880V									
	OCP Accuracy	3.6-37.8A N/A	5-75.6A	5-113.4A	1.35- 14.18A	2.7-28.35A	4.05- 42.53A	0.45-4.72A	0.9-9.45A	1.35-14.17A	0.144- 1.512A	0.288- 3.024A	0.432- 4.536A						
	OTP	Internal Temperature Rise Determines						Internal Temperature Rise Determines											
Size and Weight	Overall Size (mm)	215(W)×146(H)×420(D)																	
	Shelf Size (mm)	215(W)×132(H)×420(D)																	
Net Weight	3kg	5.3kg	7.5kg	3kg	5.3kg	7.5kg	3kg	5.3kg	7.5kg	3kg	5.3kg	7.5kg							
Power Supply	88-265VAC, 50/60Hz						88-265VAC, 50/60Hz												

"Note: Power regulation rate (88-132VAC or 170-265VAC, constant load).

Load regulation rate (no load - full load, constant input voltage).

Rise time (10%-90% of rated output voltage, with rated resistive load)

Drop time (90%-10% of rated output voltage, with rated resistive load)

Dynamic recovery time (when the load changes from 50% to 100% of the rated output current, the time for the output voltage to recover within the range of 0.1%+10mV of the rated output")

# Power Electric Tester

## III. TH6700A Series Programmable Switch DC Power Supply

### Features

- Wide range, and constant power output
- High efficiency and high power density
- Programmable internal resistance, designed for battery output simulation
- Constant current (CC) priority mode, prevent overshoot for LED power supply
- Master-slave series and parallel operation
- 4-Digit LED display
- Voltage and current adjustment with knob
- programmable voltage or current rising time
- RS232, USB HOST, USB DEVICE, LAN, and analog control interface



### TH6700A

Rack mount (mm):

- 71.5(W)x146(H)x420(D) 【TH6711A/6721A/6731A/6741A】
- 143(W)x146(H)x420(D) 【TH6712A/6722A/6732A/6742A】
- 215(W)x146(H)x420(D) 【TH6713A/6723A/6733A/6743A】

Dimension (mm):

- 71.5(W)x132(H)x420(D) 【TH6711A/6721A/6731A/6741A】
- 143(W)x132(H)x420(D) 【TH6712A/6722A/6732A/6742A】
- 215(W)x132(H)x420(D) 【TH6713A/6723A/6733A/6743A】

Net weight :

- 3.4kg 【TH6711A/6721A/6731A/6741A】
- 5.7kg 【TH6712A/6722A/6732A/6742A】
- 8 kg 【TH6713A/6723A/6733A/6743A】

RS232	LAN	Analog Control Interface	USB HOST	USB DEVICE
standard	standard	standard	standard	standard

### Brief Introduction

- TH6700A series is a single channel output, wide range programmable switch mode DC power supply, with three output powers of 360W, 720W, and 1080W. Users are able to realize 2 master-slave in series or 3 master-slave in parallel connection, to achieve the requirements of higher voltage and higher current output.

TH6700A series is designed with adjustable slope function that allows users to set the rise time and fall time of current and voltage output. When testing lighting devices and large capacitors, inrush current will be generated as soon as the output is turned on, which severely shortens the lifetime of the tested parts. In this case, the slope function ensures the voltage transmission is smooth and slow at the switching moment which prevents the tested parts from being damaged.

TH6700A series CV/CC priority mode protects the tested parts well. The traditional power supply in CV mode will instantly bring a large surge current to the capacitive load while turning on the output. TH6700A series power supply can run in CC mode at the start of output, which avoids sudden peak current and protects the device from being damaged by surge current.

TH6700A series can simulate battery output with its programmable internal resistor. For instance, a battery supplies power to a device, the applied voltage drops as it passes through the battery's internal resistance. With TH6700A series power supply, the internal resistance can be simulated by setting values, thus causing the output voltage to drop.

TH6700A series provides OVP, OCP, and OTP protection function. Once the output voltage or current exceeds the preset value, the output will be immediately shut down. Once the temperature inside the machine exceeds a certain temperature, the output will be shut down as well.

TH6700A series can be connected to 2 or 4-terminal measurement from the rear panel. The 4-terminal measurement has the remote compensation function, which compensates the pressure drop from the power supply to the parts to be tested.

### Application

- R & D and design verification common test
- Clean energy, solar cells, electric vehicles
- Production line table routine testing and maintenance
- Automated device integration testing
- Solar photovoltaic simulation test
- Teaching laboratory
- LED test

### Specifications

Parameter		TH6711A	TH6712A	TH6713A	TH6721A	TH6722A	TH6723A	TH6731A	TH6732A	TH6733A	TH6741A	TH6742A	TH6743A
Rated Output	Rated Power	360W	720W	1080W	360W	720W	1080W	360W	720W	1080W	360W	720W	1080W
	Max Power	Rated output *105%											
	Rated Voltage	0-30V	0-30V	0-30V	0-80V	0-80V	0-80V	0-250V			0-800V		
	Max Voltage	31.5V			84V			262.5V			840V		
Setting	Rated Current	0-33A	0-66A	0-100A	0-12.5A	0-25A	0-37.5A	4.2A	8.4A	12.6A	1.32A	2.64A	3.96A
	Max Current	36A	72A	108A	13.5A	27A	40.5A	4.5A	9A	13.5A	1.44A	2.88A	4.32A
Load Regulation	Voltage Range	0-31.5V			0-84V			0-262.5V			0-840V		
	Current Range	0-36A	0-72A	0-108A	0-13.5A	0-27A	0-40.5A	0-4.5A	0-9A	0-13.5A	0-1.44A	0-2.88A	0-4.32A
Line Regulation	Voltage	≤20mV			≤45mV			≤130mV			≤405mV		
	Current	≤41mA	≤77mA	≤113mA	≤18.5mA	≤32mA	≤45.5mA	≤9.5mA	≤14mA	≤18.5mA	≤6.44mA	≤7.88mA	≤9.32mA
Set Value Resolution	Voltage	≤18mV			≤43mV			≤128mV			≤403mV		
	Current	≤41mA	≤77mA	≤113mA	≤18.5mA	≤32mA	≤45.5mA	≤9.5mA	≤14mA	≤18.5mA	≤6.44mA	≤7.88mA	≤9.32mA
Readback Value Resolution	Voltage	10mV						100mV					
	Current	10mA	10mA	100mA	10mA	10mA	10mA	1mA	1mA	10mA	1mA	1mA	1mA
Set Value Accuracy	Voltage (>0.1V)	≤0.1%+10mV						≤0.1%+200mV			≤0.1%+400mV		
	Current (>0.1A)	≤0.1%+30mA	≤0.1%+60mA	≤0.1%+100mA	≤0.1%+20mA	≤0.1%+40mA	≤0.1%+50mA	≤0.1%+5mA	≤0.1%+10mA	≤0.1%+20mA	≤0.1%+2mA	≤0.1%+4mA	≤0.1%+6mA

# Power Electric Tester

## III. TH6700A Series Programmable Switch DC Power Supply

### Specifications

Readback Value Accuracy (25°C±5°C)	Voltage (>0.1V)	≤0.1%+20mV						≤0.1%+200mV			≤0.1%+400mV							
Current (>0.1A)	≤0.1%+40mA	≤0.1%+70mA	≤0.1%+100mA	≤0.1%+20mA	≤0.1%+40mA	≤0.1%+50mA	≤0.1%+5mA	≤0.1%+10mA	≤0.1%+20mA	≤0.1%+2mA	≤0.1%+4mA	≤0.1%+6mA						
"Ripple and Noise (20Hz-2MHz)"	Differential Mode Voltage	≤60mVp-p and 7mVrms	≤80mVp-p and 11mVrms	≤100mVp-p and 14mVrms	≤60mVp-p and 7mVrms	≤80mVp-p and 11mVrms	≤100mVp-p and 14mVrms	≤80mVp-p and 15mVrms	≤100mVp-p and 15mVrms	≤120mVp-p and 30mVrms	≤150mVp-p and 30mVrms	≤200mVp-p and 30mVrms	≤200mVp-p and 30mVrms					
"Dynamic Recovery Time (50%-100% Load) Load Frequency =100Hz"	Recover to 0.1% + 10mV: ≤2ms									≤2ms								
Rise Time (Full Load)	10%-90%	≤50ms						≤100ms			≤150ms							
Rise Time (No Load)	10%-90%	≤50ms						≤100ms			≤150ms							
Drop Time (Full Load)	90%-10%	≤50ms						≤150ms			≤300ms							
Drop Time (No Load)	90%-10%	≤500ms						≤1200ms			≤2000ms							
Start Delay	Setting Range	0-99.99s						0-99.99s										
Stop Delay	Setting Range	0-99.99s						0-99.99s										
Slope Setting	Voltage Rise	0.01-60V/s			0.1-160V/s			0.1-500V/s			1-1600V/s							
	Voltage Drop	0.01-60V/s			0.1-160V/s			0.1-500V/s			1-1600V/s							
	Current Rise	0.01-72A/s	0.1-144A/s	0.1-216A/s	0.01-27A/s	0.01-54A/s	0.01-81A/s	0.001-9A/s	0.01-18A/s	0.01-27A/s	0.001-2.88A/s	0.001-5.76A/s	0.001-8.64A/s					
	Current Drop	0.01-72A/s	0.1-144A/s	0.1-216A/s	0.01-27A/s	0.01-54A/s	0.01-81A/s	0.001-9A/s	0.01-18A/s	0.01-27A/s	0.001-2.88A/s	0.001-5.76A/s	0.001-8.64A/s					
Analog Internal Resistance	Setting Range	0-0.833Ω	0-0.417Ω	0-0.278Ω	0-5.926Ω	0-2.963Ω	0-1.975Ω	0-55.55Ω	0-27.77Ω	0-18.51Ω	0-555.5Ω	0-277.8Ω	0-185.1Ω					
"External Voltage Control (25°C±5°C)"	CV Accuracy	Rated Output Voltage±0.5%						Rated Output Voltage±0.5%										
	CC Accuracy	Rated Output Current±1%						Rated Output Current±1%										
"External resistance control (25°C±5°C)"	CV Accuracy	Rated Output Voltage±1.5%						Rated Output Voltage±1.5%										
	CC Accuracy	Rated Output Current±1.5%						Rated Output Current±1.5%										
Power Factor	100VAC (Full Load)	0.99						0.99			0.99							
	200VAC (Full Load)	0.97						0.97			0.97							
Efficient	100VAC (Full Load)	75%			76%			77%			78%							
	200VAC (Full Load)	77%			78%			79%			80%							
Master-Slave Control	Master-Slave Parallel	3 Sets including the master tester						3 Sets including the master tester										
	Master-Slave Series	2 Sets including the master tester						2 Sets including the master tester										
Protection	OVP Accuracy	3-33V	3-33V	3-33V	8-88V	8-88V	8-88V	20-275V			20-880V							
	OCP Accuracy	N/A						±2% Rated Output Voltage										
	OTP	3.6-37.8A	5-75.6A	5-113.4A	1.35-14.18A	2.7-28.35A	4.05-42.53A	0.45-4.72A	0.9-9.45A	1.35-14.17A	0.144-1.512A	0.288-3.024A	0.432-4.536A					
	Power Supply	88-265VAC, 50/60Hz						88-265VAC, 50/60Hz										

"Note: Power regulation rate (88-132VAC or 170-265VAC, constant load).

Load regulation rate (no load - full load, constant input voltage).

Rise time (10%-90% of rated output voltage, with rated resistive load)

Drop time (90%-10% of rated output voltage, with rated resistive load)

Dynamic recovery time (when the load changes from 50% to 100% of the rated output current, the time for the output voltage to recover within the range of 0.1%+10mV of the rated output")

# Power Electric Tester

## III. TH6900 Series Programmable DC Power Supply

### Features

- The output range is 3 times of the equal power "rectangular" power supply
- High frequency LLC multi-resonant inverter, the efficiency of the whole machine is as high as 93%
- Active PFC, power factor up to 0.99
- High resolution, high precision; low ripple, low noise
- ≤2ms fast transient response
- The rising edge and falling edge speed of the output are adjustable
- Power supply constant voltage (CV), constant current (CC), constant power (CP) mode
- The master-slave mode supports parallel connection, active current sharing, and parallel connection of up to 10 units of the same type
- OVP, OCP, OPP, OTP, input undervoltage protection, SENSE terminal reverse connection protection
- Built-in function generator
- Equipped with discharge circuit (Uout< 10V within 1s)
- Separate control of power output through external analog interface
- High-brightness color LCD display
- Flexible and powerful sequence test function
- Support SCPI command language
- Interface: RS232, USB HOST, Optional (RS485, LAN )

### Application

- General testing for R&D and design verification
- New energy solar cells, new power vehicles, electric bicycles
- Routine test and maintenance of production line workbench
- Automated device integration testing
- Solar photovoltaic simulation test
- Teaching laboratory
- LED test



TH6900

Rack mount (mm): 482(W) x 88(H) x 455(D)  
Net weight : 13.5kg

RS232  
standard

USB HOST  
standard

### Brief Introduction

■ TH6900 series is a programmable switching DC power supply with a wide range of output. There are 21 models of 750W, 1500W and 3000W available. The instrument supports up to 10 master-slave units of the same model in parallel to meet higher output current and output power requirements.

TH6900 series supports sequence test function, allowing users to set a series of voltage, current, power, and automatically output according to the set rules, to better meet the user's application of automatic test and burn-in test. The instrument can store 50 sequences, each sequence contains 22 steps, the function of each step can be set independently, a total of 12 independent functions, including loop control, slope mode output and other rich control functions.

This instrument can output sine wave, square wave, triangle wave, trapezoidal wave, etc. according to the set parameters such as voltage and current. Based on these waveforms, users can form a sequence output. The sequence can be set up to ten steps, and each step can be set to any A waveform and the duration of the waveform, which is convenient for users to test products. In addition, the TH6900 power supply has a solar cell array simulation function. In addition to CC, CV, EN50530 and other modes output through the host computer software, the single machine also has a built-in model for simulating the output curve of the solar cell array.

This series of power supplies also have adjustable rising and falling edge speeds. In all modes (source CV, CC, CP), the rise and fall time can be set, and the setting range is 0.01S~999.99S.

### Specifications

Parameter	Model	TH6940-60	TH6980-30	TH69200-12.5	TH69360-7.5	TH69500-5	TH69750-3	TH691000-2.5
Rated Output	Voltage	40V	80V	200V	360V	500V	750V	1000V
	Current	60A	30A	12.5A	7.5A	5A	3A	2.5A
	Power	750W						
	Efficient	≤92%	≤92%	≤92%	≤93%	≤93%	≤93%	≤93%
Load Regulation Rate	Voltage	<=0.05%FS (0-100% Load Regulation Rate)						
	Current	<=0.15%FS (0-100%ΔUDC Load Regulation Rate)						
Line Regulation Rate	Voltage	<=0.02%FS (±10%ΔUAC Input)						
	Current	<=0.05%FS (±10%ΔUAC Input)						
Set Value Resolution	Voltage	10mV	10mV	10mV	10mV	10mV	10mV	10mV
	Current	10mA	10mA	10mA	1mA	1mA	1mA	1mA
Readback Value Resolution	Voltage	10mV	10mV	10mV	10mV	10mV	10mV	10mV
	Current	10mA	10mA	10mA	1mA	1mA	1mA	1mA
Set Value Accuracy (25°C±5°C)	Voltage	≤±(0.05%+0.04%FS)						
	Current	≤±(0.15%+0.1%FS)						
	Power	≤±0.8%FS						
Readback Value Accuracy (25°C±5°C)	Voltage	≤±(0.05%+0.04%FS)						
	Current	≤±(0.15%+0.1%FS)						
	Power	≤±0.8%FS						
"Ripple and Noise (20Hz-2MHz)"	RMS (20Hz-300kHz)	10mVrms	10mVrms	20mVrms	40mVrms	50mVrms	75mVrms	100mVrms
	P-P (20Hz-2MHz)	75mVpp	100mVpp	175mVpp	250mVpp	325mVpp	500mVpp	650mVpp
Rise Time (No Load)	10%-100%	≤2ms						
Rise Time (Full Load)	10%-90%	≤30ms						
Protection	OTP, OVP, OCP, OPP, PF							

# Power Electric Tester

## III. TH6900 Series Programmable DC Power Supply

Isolated Withstand Voltage		1000VDC (Output to Ground)						
Master-Slave Control		Connect up to 10 products (via shared bus) with true master-slave operation						
Storage		10 groups of working modes; 50 sequences, 20 steps per group						
Analog Interface	Specification	Built-in 15-pin D-Sub female connector, electrically isolated						
	Signal Range	0-5V or 0-10V (Switchable)						
	U/I/P Accuracy	0-10V: <=0.2%FS 0-5V: <=0.4%FS						
Communication Interface	Standard	RS232, USB HOST						
	Optional	RS485, CAN, LAN						
Power Supply	Phase	1ph+N+PE						
	Voltage	220VAC±10%						
	Frequency	45-66Hz						
	Power Factor	≥0.99						
Working Environment		Indoor type; Working temperature: 0~50°C, Humidity: <80%, no condensation, Storage temperature: -20~70°C, Altitude: <2000m						
Size W×H×D(mm)		482mm×88mm×455mm (W×H×D) Standard Frame, 2U High.						
Weight		9.6kg						

Parameter	Model	TH6935-100	TH6980-60	TH69200-25	TH69360-15	TH69500-10	TH69750-6	TH691000-5
Rated Output	Voltage	35V	80V	200V	360V	500V	750V	1000V
	Current	100A	60A	25A	15A	10A	6A	5A
	Power	1500W						
	Efficient	≤92%	≤92%	≤92%	≤93%	≤93%	≤93%	≤93%
Load Regulation Rate	Voltage	<=0.05%FS (0-100% Load Regulation Rate)						
	Current	<=0.15%FS (0-100%△UDC Load Regulation Rate)						
Line Regulation Rate	Voltage	<=0.02%FS (±10%△UAC Input)						
	Current	<=0.05%FS (±10%△UAC Input)						
Set Value Resolution	Voltage	10mV	10mV	10mV	10mV	10mV	10mV	10mV
	Current	10mA	10mA	10mA	10mA	10mA	1mA	1mA
Readback Value Resolution	Voltage	10mV	10mV	10mV	10mV	10mV	10mV	10mV
	Current	10mA	10mA	10mA	10mA	10mA	1mA	1mA
Set Value Accuracy (25°C±5°C)	Voltage	≤(0.05%+0.04%FS)						
	Current	≤(0.15%+0.1%FS)						
	Power	≤±0.8%FS						
Readback Value Accuracy (25°C±5°C)	Voltage	≤(0.05%+0.04%FS)						
	Current	≤(0.15%+0.1%FS)						
	Power	≤±0.8%FS						
"Ripple and Noise (20Hz-300kHz) P-P (20Hz-2MHz)"	RMS (20Hz-300kHz)	10mVrms	10mVrms	20mVrms	40mVrms	50mVrms	75mVrms	100mVrms
	P-P (20Hz-2MHz)	75mVpp	100mVpp	175mVpp	250mVpp	325mVpp	500mVpp	650mVpp
Rise Time (No Load)	10%-100%	≤2ms						
Rise Time (Full Load)	10%-90%	≤30ms						
Protection	OTP, OVP, OCP, OPP, PF							
Isolated Withstand Voltage		1000VDC (Output to Ground)						
Master-Slave Control		Connect up to 10 products (via shared bus) with true master-slave operation						
Storage		10 groups of working modes; 50 sequences, 20 steps per group						
Analog Interface	Specification	Built-in 15-pin D-Sub female connector, electrically isolated						
	Signal Range	0-5V or 0-10V (Switchable)						
	U/I/P Accuracy	0-10V: <=0.2%FS 0-5V: <=0.4%FS						
Communication Interface	Standard	RS232, USB HOST						
	Optional	RS485, CAN, GPIB, LAN						
Power Supply	Phase	1ph+N+PE						
	Voltage	220VAC±10%						
	Frequency	45-66Hz						
	Power Factor	≥0.99						
Working Environment		Indoor type; Working temperature: 0~50°C, Humidity: <80%, no condensation, Storage temperature: -20~70°C, Altitude: <2000m						
Size W×H×D(mm)		482mm×88mm×455mm (W×H×D) Standard Frame, 2U High.						
Weight		10.8kg						

# Power Electric Tester

## III. TH6900 Series Programmable DC Power Supply

Parameter	Model	TH6935-200	TH6980-120	TH69200-50	TH69360-30	TH69500-20	TH69750-12	TH691000-10							
Rated Output	Voltage	35V	80V	200V	360V	500V	750V	1000V							
	Current	200A	120A	50A	30A	20A	12A	10A							
	Power	3000W													
	Efficient	≤92%	≤92%	≤92%	≤93%	≤93%	≤93%	≤93%							
Load Regulation Rate	Voltage	<=0.05%FS (0-100% Load Regulation Rate)													
	Current	<=0.15%FS (0-100%△UDC Load Regulation Rate)													
Line Regulation Rate	Voltage	<=0.02%FS (±10%△UAC Input)													
	Current	<=0.05%FS (±10%△UAC Input)													
Set Value Resolution	Voltage	10mV	10mV	10mV	10mV	10mV	10mV	10mV							
	Current	10mA	10mA	10mA	10mA	10mA	10mA	10mA							
Readback Value Resolution	Voltage	10mV	10mV	10mV	10mV	10mV	10mV	10mV							
	Current	10mA	10mA	10mA	10mA	10mA	10mA	10mA							
Set Value Accuracy (25°C±5°C)	Voltage	≤±(0.05%+0.04%FS)													
	Current	≤±(0.15%+0.1%FS)													
	Power	≤±0.8%FS													
Readback Value Accuracy (25°C±5°C)	Voltage	≤±(0.05%+0.04%FS)													
	Current	≤±(0.15%+0.1%FS)													
	Power	≤±0.8%FS													
"Ripple and Noise (20Hz-2MHz)"	RMS (20Hz-300kHz)	10mVrms	10mVrms	20mVrms	40mVrms	50mVrms	75mVrms	100mVrms							
	P-P (20Hz-2MHz)	75mVpp	100mVpp	175mVpp	250mVpp	325mVpp	500mVpp	650mVpp							
Rise Time (No Load)	10%-100%	≤2ms													
Rise Time (Full Load)	10%-90%	≤30ms													
Protection	OTP, OVP, OCP, OPP, PF														
Isolated Withstand Voltage	1000VDC (Output to Ground)														
Master-Slave Control	Connect up to 10 products (via shared bus) with true master-slave operation														
Storage	10 groups of working modes; 50 sequences, 20 steps per group														
Analog Interface	Specification	Built-in 15-pin D-Sub female connector, electrically isolated													
	Signal Range	0-5V or 0-10V (Switchable)													
	U/I/P Accuracy	0-10V: <=0.2%FS 0-5V: <=0.4%FS													
Communication Interface	Standard	RS232, USB HOST													
	Optional	RS485, CAN, GPIB, LAN													
Power Supply	Phase	1ph+N+PE													
	Voltage	220VAC±10%													
	Frequency	45-66Hz													
	Power Factor	≥0.99													
Working Environment		Indoor type; Working temperature: 0~50°C, Humidity: <80%, no condensation, Storage temperature: -20~70°C, Altitude: <2000m													
Size W×H×D(mm)		482mm×88mm×455mm (W×H×D) Standard Frame, 2U High.													
Weight		13.5kg													

# Power Electric Tester

## III. TH7200 Series Programmable AC/DC PowerSupply

### Features

- 24-bit color 4.3-inch 480 x 272 color LCD, Chinese and English interface
- Linear amplification design, single-phase input, AC, DC, AC/DC output: Output power: 500VA, 1000VA
- Output voltage: 0-300V
- Setting frequency: 1Hz-1kHz
- Support DC output: Output power: 350W, 700W
- Output voltage: 1.4-424V
- Front and rear panel output
- Output switch control
- Flexible and convenient operation: numeric keypad, adjustment knob
- Waveform output function
- Built-in waveforms: Sine, Square, Triangle, Clip, Glitch, Trap, Dimmer Support customized waveforms, which can be imported via CSV file
- Start phase, end phase setting
- Support timing function
- 14 kinds of electrical parameters measurement
- Store setup parameters and test results
- Support USB to upgrade instrument firmware
- Seven protection modes



RS232	LAN	USB HOST	USB DEVICE
standard	standard	standard	standard

Dimension(mm): 430(W)×177(H)×610(D)

Weight: 27.5kg

### Application

- Motors and transformers
- Electronic production design
- Lighting
- Aerospace military
- Network communication
- Audio and video equipment
- Monitoring equipment
- Power specifications simulation of different countries
- Electromagnetic compatibility equipment

### Specifications

Model	TH7205		TH7210	
Input Parameter				
Phase	1Ø/2W			
Voltage	100-120Vac, 200-240Vac			
Frequency	47-63Hz			
Maximum Current	11.3A/5.5A		22.5A/10.8A	
Power Factor	0.7			
AC Output Parameter				
Rated Power	500VA		1000VA	
Output Voltage	Range	LOW	1.0-150.0V	
		HIGH	2.0-300.0V	
	Resolution		0.1V	
	Accuracy		±(0.3% + 0.6V of set voltage)	
Output Frequency	Range		1Hz-1000Hz	
	Accuracy		0.01Hz 1.00-99.99Hz 0.1Hz 100.0-999.9Hz	
Maximum Current(RMS)		LOW	5.0A	
		HIGH	2.5A	
Maximum Peak Current		Maximum Current (RMS)X4 (TYP)		
Power Factor		0-1		
DC Output Parameter				
Rated Power	350W		700W	
Output Voltage	Range	LOW	1.4-212.0V	
		HIGH	2.8-424.0V	
	Resolution		0.1V	
	Accuracy	LOW	±(0.05% of set voltage + 0.05V)	
		HIGH	±(0.05% of set voltage + 0.1V)	
Maximum Current(RMS)		LOW	3.5A	
		HIGH	1.75A	
Maximum Peak Current		Maximum current(RMS)X3.6 (TYP)		
Ripple Noise		<=0.15Vrms		

# Power Electric Tester

## III. TH7200 Series Programmable AC/DC PowerSupply

### Specifications

Additional Output Parameters						
Line Regulation		±0.1%				
Load Regulation	LOW	±0.1V				
	HIGH	±0.2V				
Total Harmonic Distortion(THD)			≤0.2%			
Response time			30μS (TYP)			
Energy efficiency			≥55%			
Setup Parameters						
Voltage	Range	AC	LOW	0-150V		
		AC	HIGH	0-300V		
	DC	LOW	± (1.4-212.0) V			
		HIGH	± (2.8-424.0) V			
AC+DC	LOW	AC: 0-150V; DC: ± (1.4-212.0) V				
	HIGH	AC: 0-300V ; DC: ± (2.8-424.0) V				
Resolution			0.1V			
Measurement Parameters						
Voltage	Range	AC	0-300Vac			
		DC	-424-424V			
	Resolution	0.1V				
Frequency	Accuracy		±(1% of the readout + 2 words)			
	Range		1Hz-1000Hz			
	Resolution		0.01Hz	1.00-99.99Hz		
Current	Range	AC	0.00-5.00A			
		DC	0.00-2.50A			
	Resolution	0.01A				
Peak Current	Accuracy	±(1% of the readout + 2 words)				
		AC mode	Maximum current (RMS)x 4(TYP)			
	DC mode	Maximum current (RMS) x 3.6(TYP)				
Power	Resolution		0.01A			
	Accuracy		±(5% of the readout + 2 words)			
	Range		0-500W	0-1000W		
Power Factor	Resolution		0.1W			
	Accuracy		±(±1% of the readout + 3 words)			
	Resolution		0.001	Calculates and displays to 3 valid digits		
General Parameter						
Display		4.3-inch TFT LCD, 480 x 270				
Interface		RS232,USB DEVICE,USB HOST,LAN				
Programming Protocol		SCPI,MODBUS				
Storage	Steps		600 steps			
	Wave Library		64 sets			
Protection		Over-set current protection (HI-A), over-voltage protection (OVP), low-voltage protection (LVP), over-current protection (OCP), over-power protection (OPP), over-temperature protection (OTP)				
Operating Environment						
Power Supply	Voltage		100-120Vac or 198-242Vac			
	Frequency		47-63Hz			
	Power		≥80VA			
Operating Temperature		0°C~40°C				
Operating Humidity		20%~80% (non-condensing)				
Storage Temperature		-20°C~70°C				
Altitude		Operate at altitudes up to 2000 meters				
Contamination Level		Pollution level 2				
Safety Class		Safety Category II				
Dimensions and weight						
Dimension (L×W×H) mm		430 (W)×177(H)×610(D)				
Net Weight (kg)		27.5				

# Power Electric Tester

## III. TH7100 Series Programmable AC Power Supply

### Features

- 24-bit color 4.3-inch 480 × 272 color LCD screen, Chinese and English interfaces
- Linear output design
- Flexible and convenient operation: numeric keypad, coarse and fine adjustment knob
- Manual / program control mode output function, timing output function, dimming mode output function, surge and notch function
- Front panel output function
- Boot hold function
- Store setting parameters and test results
- Support USB to upgrade the instrument firmware
- Multiple protection modes: set the current protection (HI-A) Overvoltage Protection (OVP), Low Voltage Protection (LVP) Overcurrent protection (OCP), over power protection (OPP) Over temperature protection (OTP)
- Two-gear temperature to control fan speed
- Remote input and output functions:
  - Remote input: input control of 7 groups of memory
  - Remote output: PASS, FAIL, PROCESSING, internal output switch
- Memory capacity:
  - Manual: 50 groups
  - Program control: 50 groups, 9 steps / group



CE

RS232	REMOTE	USB HOST	USB DEVICE	GPIB
standard	standard	standard	standard	option

### TH7110

Dimension(mm): 430(W)×88(H)×600(D)

Weight: 40kg

### Application

- Motors and transformers
- Electronic production design
- Lighting
- Aerospace military
- Network communication
- Audio and video equipment
- Monitoring equipment
- Power specifications simulation of different countries
- Electromagnetic compatibility equipment

### Specifications

Model	TH7105	TH7110	TH7120	
Output parameters				
Rated power	500W	1000W	2000W	
Output voltage	0~300V			
Output frequency	45.0Hz~500Hz			
Maximum current (RMS)	0-150V 0-300V	4.2A 2.1A	8.4A 4.2A	16.8A 8.4A
Maximum current (Peak)	0-150V 0-300V	12.6A 6.3A	25.2A 12.6A	50.4A 25.2A
Total harmonic distortion (THD)	at 45.0 ~ 500Hz, ≤ 0.5% (resistive load)			
Common parameters	Phase	1Ø/2W		
	Crest factor	≥4		
	Linearity adjustment rate	0.1%±10%		
	Load regulation	0.5%(resistive load)		
	Response time	<100uS		
Setting parameters				
Voltage	0 ~ 300V	Resolution	0.1V	
Frequency	45.0Hz ~ 500Hz		<100Hz: 0.1Hz ; ≥100Hz: 1Hz	
Initial / final phase angle	0 ~ 359°		1°	
Measurement parameters				
Voltage	0 ~ 300V	Resolution	0.1V	
Frequency	45.0Hz ~ 500Hz		<100Hz: 0.1Hz ; ≥100Hz: 1Hz	
Initial / final phase angle	0 ~ 359°		1°(45 ~ 65Hz)	
Current	0-150V	0.000 ~ 4.200A	0.000 ~ 16.800A	
	0-300V	0.000 ~ 2.100A	0.000 ~ 8.400A	
	Resolution	0.001A		
	Accuracy	±0.5%+5 digits		
	0-150V	0.00 ~ 12.6A	0.00 ~ 50.4A	
Peak current	0-300V	0.00 ~ 6.3A	0.00 ~ 25.2A	
	Resolution	0.01A		
	Accuracy	±5%+2 digits		
	Range	0 ~ 500W	0 ~ 2000W	
Power	Resolution	0.1W	0.1W(0 ~ 1000W);1W(1000 ~ 2000W)	
	Accuracy	±0.6%+5 digits		
	Power factor	0.001-1.000	Resolution 0.001 Accuracy ±2%+2 digits	

# Power Electric Tester

## III. TH8200 Series Programmable DC Electronic Load

### Features

- Constant current (CC), constant resistance (CR), constant power (CV), constant power (CP) operation mode
- Current remote control monitoring function, external trigger function
- 1mV/10µA high resolution, ripple measurement function
- Dynamic current/voltage test, up to 50K dynamic frequency
- Voltage and current measurement can achieve high precision while testing speed up to 100KHz
- Programmable soft start function
- CR-LED test, arbitrary I-V characteristics, battery test, dynamic scan test, load effect, list function and many other advanced functions
- Overvoltage (programmable), low voltage, over current (programmable), overpower (programmable), overheating, anti-reverse protection, etc.
- Remote voltage compensation input test function
- Short circuit function simulation
- The adoption of the Linux operating system makes the number of internal parameter file storages essentially unrestricted
- Perfect U disk function (parameter file storage and loading, interface screenshot, system firmware upgrade)
- Setting parameters support power-off memory function
- RS232 (standard), USB (standard), Ethernet (standard), WIFI (optional)
- Matching with upper-computer software to achieve remote operation and monitoring matching



RS232	USB HOST	USB DEVICE	HANDLER	LAN
standard	standard	standard	standard	standard

Dimension(mm): 215mm(W)x143mm(H)x525mm(D)[TH8201/TH8202/A]

Dimension(mm): 430mm(W)x143mm(H)x525mm(D)[TH8203/TH8204]

Weight: 7.8kg[TH8201] / 9.1kg[TH8202] / 8.7kg[TH8202A]

### Application

- Power
  - Chargers, switching power supply, communication power, LED drivers, cell phone batteries, portable power source
- New energy
  - Solar cells, new power cars, electric bicycles
- Electronic power components
  - Fuse / Connector / Relay / Sensor
- Automated equipment integration testing

### Specifications

Model	TH8201	TH8202	TH8202A	TH8202B	TH8203	TH8203A	TH8204	TH8204A	TH8204B	TH8205
Input power	175W	350W	350W	500W	700W	700W	1000W	1000W	1200W	2000W
Input voltage	150V									
Input current	0-40A	0-80A	0-40A	0-80A	0-160A	0-80A	0-200A	0-100A	0-160A	0-200A
Static mode	Constant current (CC), constant resistance (CR), constant voltage (CV), constant power (CP)									
Minimum operating voltage	1.5V@0.4A	1.5V@0.8A	1.5V@0.4A	1.5V@0.8A	1.5V@1.6A	1.5V@0.8A	1.5V@2A	1.5V@1A	1.5V@1.6A	1.5V@2A
	1.5V@4A	1.5V@8A	1.5V@4A	1.5V@8A	1.5V@16A	1.5V@8A	1.5V@20A	1.5V@10A	1.5V@16A	1.5V@20A
	1.5V@40A	1.5V@80A	1.5V@40A	1.5V@80A	1.5V@160A	1.5V@80A	1.5V@200A	1.5V@100A	1.5V@160A	1.5V@200A
Constant voltage (CV)	Range	0-15V								
	Resolution	1mV								
	Range	0-150V								
	Resolution	10mV								
Constant current (CC)	Precision	0.05%+0.05%FS								
	Range	0-400mA	0-800mA	0-400mA	0-800mA	0-1.6A	0-0.8A	0-2A	0-1A	0-1.6A
	Resolution	0.01mA	0.02mA	0.01mA	0.02mA	0.04mA	0.02mA	0.06mA	0.03mA	0.04mA
	Range	0-4A	0-8A	0-4A	0-8A	0-16A	0-8A	0-20A	0-10A	0-16A
Constant resistance (CR)	Resolution	0.1mA	0.2mA	0.1mA	0.2mA	0.4mA	0.2mA	0.6mA	0.3mA	0.4mA
	Range	0-40A	0-80A	0-40A	0-80A	0-160A	0-80A	0-200A	0-100A	0-160A
	Resolution	1mA	2mA	1mA	2mA	4mA	2mA	6mA	3mA	4mA
	Precision	0.1%+0.1%FS								
Constant power (CP)	Range	0.04Ω-40Ω	0.02Ω-20Ω	0.04Ω-40Ω	0.02Ω-20Ω	0.018Ω-18Ω	0.036Ω-36Ω	0.015Ω-15Ω	0.03Ω-30Ω	0.018Ω-18Ω
	Range	0.4Ω-400Ω	0.2Ω-200Ω	0.4Ω-400Ω	0.2Ω-200Ω	0.072Ω-72Ω	0.144Ω-144Ω	0.06Ω-60Ω	0.12Ω-120Ω	0.072Ω-72Ω
	Range	4.0Ω-4000Ω	2.0Ω-2000Ω	4.0Ω-4000Ω	2.0Ω-2000Ω	1.8Ω-3000Ω	3.6Ω-3000Ω	1.5Ω-3000Ω	3Ω-3000Ω	1.8Ω-3000Ω
	Resolution									
Dimensions and weight	Precision	Vin/Rset*0.2%+0.2%FS								
	Range	0-1.75W	0-3.5W	0-3.5W	0-5W	0-7W	0-7W	0-10W	0-10W	0-12W
	Resolution	0.175mW	0.35mW	0.35mW	0.5mW	0.7mW	0.7mW	1mW	1mW	1.2mW
	Range	0-17.5W	0-35W	0-35W	0-50W	0-70W	0-70W	0-100W	0-100W	0-120W
Dimensions (mm)	Resolution	1.75mW	3.5mW	3.5mW	5mW	7mW	7mW	10mW	10mW	12mW
	Range	0-175W	0-350W	0-350W	0-500W	0-700W	0-700W	0-1000W	0-1000W	0-1200W
	Resolution	17.5mW	35mW	35mW	50mW	70mW	70mW	100mW	100mW	120mW
	Precision	0.3%+0.3%FS								
Dimensions and weight										
Dimensions (mm)	215*129*479mm				430*129*479mm				430*129*479mm	
Weight(kg)	7.8kg	9.1kg	8.7kg	9.1kg	15.6kg	15.3kg	17.6kg	17.3kg	17.6kg	20kg

# Power Electric Tester

## III. TH8200 Series Programmable DC Electronic Load

Model	TH8212	TH8214	TH8215
Input power	500W	800W	1200W
Input voltage	10-800V		
Input current	0-15A	0-30A	60A
Static mode	Constant current (CC), constant resistance (CR), constant voltage (CV), constant power (CP)		
	10V@0.15A	10V@0.3A	10V@0.6A
Minimum operating voltage	10V@1.5A	10V@3A	10V@6A
	10V@15A	10V@30A	10V@60A
Constant voltage (CV)	Range	0-80V	
	Resolution	5mV	
	Range	0-800V	
	Resolution	50mV	
	Precision	0.05%+0.05%FS	
Constant current (CC)	Range	0-0.15A	0-0.3A
	Resolution	0.01mA	0.01mA
	Range	0-0.15A	0-3A
	Resolution	0.1mA	0.1mA
	Range	0-15A	0-30A
	Resolution	1mA	1mA
Constant resistance (CR)	Precision	0.1%+0.1%FS	0.02mA
	Range	0.3Ω-3kΩ	0.2Ω-2kΩ
	Range	1.2Ω-12kΩ	0.8Ω-8kΩ
	Range	30Ω-60kΩ	20Ω-40kΩ
	Precision	Vin/Rset*0.2%+0.2%FS	0.6Ω-6kΩ
Constant power (CP)	Range	0-5W	0-8W
	Resolution	0.5mW	0.8mW
	Range	0-50W	0-80W
	Resolution	5mW	8mW
	Range	0-50W	0-800W
	Resolution	50mW	80mW
Protection function: over power protection (OPP), over current protection (OCP), over voltage protection (OVP), over temperature protection (OTP), reverse voltage alarm (REV), under voltage protection (UVP)			
Short circuit function			
Interface: network port LAN, Handler port, USB Host, USB Device, parallel interface			
Power supply and safety			
Power supply	110/220VAC		
Power frequency	50/60Hz		
Safety certificate	CE		
Environment and temperature			
Operating temperature	0-40°C		
Storage temperature	-20-80°C		
Dimensions and weight			
Dimensions (mm)	215*129*479mm		
Weight (kg)	7.8kg-215*129*479mm	9.1kg-430*129*479mm	8.7kg-430*129*479mm

# Power Electric Tester

## III. TH8300 Series Programmable DC Electronic Load



### Features

- 5-module/2-module frame
- Unit maximum power 2500W, maximum current 400A
- Module maximum power 500W, maximum current 80A, and maximum voltage 600V
- High resolution: 0.1mV/10µA
- Up to 50kHz dynamic frequency
- Up to 500kHz sampling speed
- 12 advanced test functions
- Modular design, support each module to operate independently
- Modular 40 files storage
- One single machine can support up to five modules in parallel and support up to ten channels
- Connect via CAN interface, support up to four complete machines online
- 24-bit 2.8-inch color LCD display
- Chinese and English operation interface
- Smart fan system
- Support power-on hold function
- Support timing function
- Electrical isolation, external input and output
- Support over current protection (OCP), over voltage protection(OVP), over power protection (OPP), over temperature protection(OTP), reverse polarity protection (REV), low voltage protection (LVP)



TH8300



TH8310

### Application

- Power supply  
Chargers, switching power supplies, communication power supplies, LED drivers, mobile phone batteries, power banks, etc.
- New energy  
Solar cells, new power cars, electric bicycles
- Electronic power components  
Fuse/connector/relay/sensor
- Automation equipment integration test

RS232	USB HOST	USB DEVICE	GPIB	LAN	CAN	SYSTEM I/O
standard	standard	standard	standard	standard	standard	standard

Dimension(mm): 477mm(W)×177mm(H)×590mm(D) Weight: 15kg

Dimension(mm): 142mm(W)×85.5mm(H)×550mm(D) Weight: 4.2kg

### Specifications

Main machine	TH8300 Frame					TH8310 Frame		
Supported modules	5					2		
Interface	RS232, USB HOST, USB DEVICE, LAN, GPIB, SYSTEM I/O, CAN							
Storage	40 groups (50 groups of status memory)							
Power supply	90-130VAC or 175-253VAC (47-63Hz)							
Power consumption	Less than 300VA							
Temperature and environment	Operating temperature	0 degrees Celsius - 40 degrees Celsius						
	Operating humidity	10%-90% (non-condensing)						
	Storage temperature	-20 degrees Celsius -70 degrees Celsius						
	Altitude	Less than 2000m						
	Pollution degree	Pollution degree 2						
	Security Level	Safety Category II						
Size and Weight	Frame Size	480mm×177mm×590mm				260mm×177mm×590mm		
	Frame Weight	15kg				11kg		
Module Model	TH8301-80-20	TH8301A-80-20	TH8302-80-40	TH8303-80-60	TH8304-80-80	TH8305-600-10	TH8302-600-15	TH8303-600-30
Input Power	100W×2	200W×2	200W×1	300W×1	400W×1	500W×1	200W×1	300W×1
Input Voltage	0-80V							
Input Current	0-20A	0-20A	0-40A	0-60A	0-80A	0-80A	0-10A	0-15A
Minimum operating voltage	0.5V@0.2A	0.5V@0.2A	0.5V@0.4A	0.5V@0.6A	0.4V@0.8A	0.4V@0.8A	2V@0.1A	2V@0.15A
	0.5V@2A	0.5V@2A	0.5V@4A	0.4V@8A	0.4V@8A	2V@1A	2V@1.5A	2V@3A
	0.5V@20A	0.5V@20A	0.5V@40A	0.4V@80A	0.4V@80A	2V@10A	2V@15A	2V@30A
Standard Mode	Constant current (CC), constant resistance (CR), constant voltage (CV), constant power (CP)							
Constant voltage (CV)	Range/Resolution	6V/0.1mV, 16V/1mV, 80V/1mV				80V/1mV, 150V/10mV, 600V/10mV		
	Accuracy	0.05%+0.1%FS						

# Power Electric Tester

## III. TH8300 Series Programmable DC Electronic Load

Constant current (CC)	Range	0-0.2A	0-0.2A	0-0.4A	0-0.6A	0-0.8A	0-0.8A	0-0.1A	0-0.15A	0-0.3A	
	Resolution	0.01mA	0.01mA	0.01mA	0.01mA	0.01mA	0.01mA	0.005mA	0.005mA	0.005mA	
	Range	0-2A	0-2A	0-4A	0-6A	0-8A	0-8A	0-1A	0-1.5A	0-3A	
	Resolution	0.1mA	0.1mA	0.1mA	0.1mA	0.1mA	0.1mA	0.05mA	0.05mA	0.05mA	
	Range	0-20A	0-20A	0-40A	0-60A	0-80A	0-80A	0-10A	0-15A	0-30A	
	Resolution	1mA	1mA	1mA	1mA	1mA	1mA	0.5mA	0.5mA	0.5mA	
	Accuracy	0.1%+0.1%FS									
Constant resistance (CR)	Range	0.04-80Ω (100W/6V)	0.04-80Ω (200W/6V)	0.02-40Ω (200W/6V)	0.015-30Ω (300W/6V)	0.01-20Ω (400W/6V)	0.01-20Ω (500W/6V)	0.2-400Ω (200W/80V)	0.133-270Ω (300W/80V)	0.133-270Ω (500W/80V)	
		1.44-2.9kΩ (100W/16V)	1.44-2.9kΩ (200W/16V)	0.8-1.5kΩ (200W/16V)	0.3-600Ω (300W/16V)	0.36-720Ω (400W/16V)	0.36-720Ω (500W/16V)	3-6kΩ (200W/150V)	1.92-4kΩ (300W/10V)	1.92-4kΩ (500W/150V)	
		5.76-12kΩ (100W/80V)	5.76-12kΩ (200W/80V)	3-6kΩ (200W/80V)	1.5-3kΩ (300W/80V)	1.45-2.9kΩ (400W/80V)	1.45-2.9kΩ (500W/80V)	300-300kΩ (200W/600V)	208-200kΩ (300W/600V)	208-200kΩ (500W/600V)	
	Resolution	0.1Ω									
Constant power (CP)	Accuracy	1%									
	Range	0-2W	0-4W	0-4W	0-6W	0-8W	0-10W	0-4W	0-6W	0-10W	
	Resolution	1mW	2mW	2mW	3mW	4mW	5mW	2mW	3mW	5mW	
	Range	0-10w	0-20w	0-20w	0-30w	0-40w	0-50w	0-20W	0-30w	0-50w	
	Resolution	10mW	20mW	20mW	30mW	40mW	50mW	20mW	30mW	50mW	
	Range	0-100w	0-200w	0-200w	0-300w	0-400w	0-500w	0-200W	0-300w	0-500w	
	Resolution	100mW	200mW	200mW	300mW	400mW	500mW	200mW	300mW	500mW	
Advanced mode	Accuracy	1%									
	Dynamic mode-constant current mode		Dynamic test, dynamic frequency scan, CR-LED test, battery test, time test, MPPT test, OCPT test, OVPT test, OPPT test, sine wave test, list test, automatic test								
	Minimum working voltage		1.5V								
	Frequency	Range	100Hz-50kHz/0.01Hz-1kHz								
		Accuracy	1μs/1ms+100ppm								
		Duty cycle	1-99% (Minimum rise time controlled)								
Slope	Range	0.04A/ms- 0.02A/μs	0.04A/ms- 0.02A/μs	0.08A/ms- 0.04A/μs	0.12A/ms- 0.06A/μs	0.16A/ms- 0.08A/μs	0.16A/ms- 0.08A/μs	0.02A/ms- 0.01A/μs	0.03A/ms- 0.015A/μs	0.06A/ms- 0.03A/μs	
		Resolution	0.01mA/μs								
	Range	0.4A/ms- 0.2A/μs	0.4A/ms- 0.2A/μs	0.8A/ms- 0.4A/μs	1.2A/ms- 0.6A/μs	1.6A/ms- 0.8A/μs	1.6A/ms- 0.8A/μs	0.2A/ms- 0.1A/μs	0.3A/ms- 0.15A/μs	0.6A/ms- 0.3A/μs	
		Resolution	0.1mA/μs								
	Range	4A/ms- μs	2A/ μs	4A/ms- μs	2A/ μs	8A/ms- μs	4A/ μs	12A/ms- μs	6A/ μs	16A/ms- 8A/μs	2A/ms- 1A/μs
		Resolution	1mA/μs								
	Accuracy	10%±20μs									
Measurement (read back)	Minimum rise time		10μs								
	Measurement (read back)										
	Voltage	Range/Resolution	0-6V/0.2mV								
		Accuracy	0.025%+0.01%FS								
		Range/Resolution	0-16V/0.3mV								
	Range/Resolution	Accuracy	0.025%+0.01%FS								
		Accuracy	0-80V/1.4mV								
		Accuracy	0.01%+0.025%FS								
Current	Range	0-0.2A	0-0.2A	0-0.4A	0-0.6A	0-0.8A	0-0.8A	0-0.1A	0-0.15A	0-0.3A	
		Resolution	0.004mA	0.004mA	0.008mA	0.012mA	0.016mA	0.016mA	0.002mA	0.003mA	
		Range	0-2A	0-2A	0-4A	0-6A	0-8A	0-8A	0-1A	0-1.5A	
	Range	Resolution	0.04mA	0.04mA	0.08mA	0.12mA	0.16mA	0.16mA	0.02mA	0.03mA	
		Range	0-20A	0-20A	0-40A	0-60A	0-80A	0-80A	0-10A	0-15A	
	Resolution	0.4mA	0.4mA	0.8mA	1.2mA	1.6mA	1.6mA	0.2mA	0.3mA	0.3mA	
		Accuracy	0.05%+0.05%FS								
Power	Range	0-16W	0-30W	0-30W	0-30W	0-60W	0-60W	0-60W	0-90W	0-180W	
		0-30W	0-60W	0-60W	0-60W	0-60W	0-60W	0-200W	0-300W	0-500W	
		0-100W	0-200W	0-200W	0-300W	0-400W	0-500W	0-200W	0-300W	0-500W	
	Accuracy	0.1%+0.1%FS									
Protection function		Over voltage protection (OVP) Over current protection (OCP) Over power protection (OPP) Over temperature protection (OTP)									
Short circuit function											
Constant current (CC)		Set to 100% of rated current									
Constant voltage (CV)		0V									
Constant resistance (CR)		60kΩ(6V); 150kΩ(16V); 700kΩ(80V)									

# Power Electric Tester

## III. TH8400 Series Programmable DC Electronic Load

### Features

- High resolution: 1mV/0.1mA
- Up to 25kHz dynamic frequency
- Up to 500kHz sampling speed
- Low ripple and low noise
- Voltage/current ripple, peak, peak-valley measurement
- Voltage/current waveform display
- 11 kinds of operation and measurement functions
- 4.3-inch 24-color 480X272 TFT LCD screen, Chinese and English interface
- Numeric keyboard and knob operation
- Screen copy function
- Remote compensation function
- Intelligent fan control
- Protection mode: over voltage, over current, over power
- Support U disk file storage and loading, program upgrade
- Software control and detection through computer
- Equipped with HANDLER interface for automatic matching
- SCPI command protocol

### Specifications

Model	TH8401		TH8402A		TH8402		TH8403		TH8404		TH8405		TH8411		TH8412												
Rated value	Power	175W		350W		350W		1000W		1500W		2000W		175W		350W											
	Voltage	0~15V	0~150V	0~15V	0~150V	0~15V	0~150V	0~15V	0~150V	0~15V	0~150V	0~15V	0~150V	0~50V	0~500V												
	Current	0~3A	0~30A	0~3A	0~30A	0~6A	0~60A	0~12A	0~120A	0~18A	0~180A	0~24A	0~240A	0~1.5A	0~15A	0~3A											
	Minimum operating voltage	1.5V@30A		1.2V@30A		1.5V@60A		1.5V@120A		1.5V@180A		1.5V@240A		3V@15A		3V@30A											
CV mode	Range	0~15V	0~150V	0~15V	0~150V	0~15V	0~150V	0~15V	0~150V	0~15V	0~150V	0~15V	0~150V	0~50V	0~500V												
	Resolution	1mV	10mV	1mV	10mV	1mV	10mV	1mV	10mV	1mV	10mV	1mV	10mV	1mV	10mV												
	Accuracy	0.05%+0.05%FS																									
CC mode	Range	0~3A	0~30A	0~3A	0~30A	0~6A	0~60A	0~12A	0~120A	0~18A	0~180A	0~24A	0~240A	0~1.5A	0~15A	0~3A											
	Resolution	0.1mA	1mA	0.1mA	1mA	0.1mA	1mA	0.1mA	1mA	0.1mA	1mA	0.1mA	1mA	0.1mA	1mA												
	Accuracy	0.05%+0.05%FS																									
CR mode	Range	0.05Ω~50kΩ		0.05Ω~50kΩ		0.05Ω~25kΩ		0.02Ω~50kΩ		0.02Ω~50kΩ		0.01Ω~25kΩ		0.2Ω~50kΩ		0.1Ω~50kΩ											
	Resolution	0.05Ω																									
	Accuracy	1%																									
CP mode	Range	0~175W		0~350W		0~350W		0~1000W		0~1500W		0~2000W		0~175W		0~350W											
	Resolution	10mW		10mW		10mW		10mW		10mW		10mW		10mW		10mW											
	Accuracy	0.5%+0.1%FS																									
Dynamic mode	Range	20 μs ~ 60s																									
	Resolution	2 μs																									
	Accuracy	2μS+100ppm																									
voltage measurement	Rise rate	0.6A/ms~1.5A/μs		0.6A/ms~1.5A/μs		1.2A/ms~3A/μs		2.4A/ms~6A/μs		3.6A/ms~9A/μs		4.8A/ms~12A/μs		0.3A/ms~0.75A/μs		0.6A/ms~1.5A/μs											
	Range	0~15V	0~150V	0~15V	0~150V	0~15V	0~150V	0~15V	0~150V	0~15V	0~150V	0~15V	0~150V	0~50V	0~500V												
	Resolution	1mV	10mV	1mV	10mV	1mV	10mV	1mV	10mV	1mV	10mV	1mV	10mV	1mV	10mV												
current measurement	Accuracy	0.08%+0.05%FS																									
	Range	0~3A	0~30A	0~3A	0~30A	0~6A	0~60A	0~12A	0~120A	0~18A	0~180A	0~24A	0~240A	0~1.5A	0~15A	0~3A											
	Resolution	0.1mA	1mA	0.1mA	1mA	0.1mA	1mA	0.1mA	1mA	0.1mA	1mA	0.1mA	1mA	0.1mA	1mA												
ripple	Range	0~15V	0~150V	0~15V	150V	0~15V	150V	0~15V	0~150V	0~15V	0~150V	0~15V	0~150V	0~50V	0~500V												
	Bandwidth	250kHz																									
	Accuracy	0.1%																									
Protection function		Over voltage protection (OVP) Over current protection (OCP) Over power protection (OPP)																									
Storage		Internal: 40 groups																									
Specification																											
Volume (mm) (W*H*D)	215×88×390	Shelf dimension(mm): 215×88×390											Shelf dimension(mm): 215×88×390														
Weight	3kg	4.8kg	4.8kg	13kg	15.5kg	18kg	3kg	4.8kg																			
Power	Supply voltage: 220V(±10%), Supply frequency: 50Hz/60Hz(±5%), Power consumption: <50VA																										
Temperature and humidity	0°C~40°C, humidity: < 90%RH																										



### Application

- Power supply
  - Chargers, switching power supplies, communication power supplies, LED drivers, mobile phone batteries, power banks, etc.
- New energy
  - Solar cells, new power cars, electric bicycles
- Electronic power components
  - Fuse/connector/relay/sensor
- Automation equipment integration test

# Power Electric Tester

## III. TH3300 Series Digital Power Meter

### Features

- 24-bit color 4.3-inch 480 x 272 color LCD screen, English and Chinese interface
- PLL (phase-locked loop) technology, faster measurement speed
- AC and DC test
- Wide current measurement range
- Input signal waveform display: Voltage and current can be displayed simultaneously or separately
- Higher measurement accuracy and faster data update rate
- Rich display mode:
  - Traditional four-window display
  - Full parameter full screen display
- Higher frequency test range and wider frequency response
- Multiple harmonic analysis display modes: List mode, Histogram
- Data Record Function



RS232	USB HOST	USB DEVICE	HANDLER	RS485
standard	standard	standard	standard	option

Rack mount (mm):215mm(W)x88mm(H)x335mm(D)  
 Dimension (mm):235mm(W)x105mm(H)x360mm(D)  
 Net weight: 3.6kg

### Application

- Appliances
  - TV, refrigerator, air conditioner, washing machines, vacuum cleaners, water heaters and other power efficiency testing
- Industry
  - Electric machinery, motor, transformer, charger, power and other power test

- Lighting
  - Lighting appliances, LED lamps and other power test
- New energy
  - Photovoltaic modules, electric vehicles, wind power and other power test

### Specifications

Model	TH3311	TH3312	TH3321	TH3331			
Display	4.3-inch color TFT display						
Connection mode	Single phase						
Basic features	AC	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			
	DC	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			
	Precise	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			
	Micro current	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
	Wide current	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>			
	Harmonic Analysis	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			
Display mode	Power test	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			
	Data	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			
	Oscilloscope	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			
Harmonic histogram		<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			
Basic accuracy		0.15% reading + 0.2% range +1 digit					
Voltage	Range	5V-75V/150V/300V/600V					
	Resolution	0.01V					
Current	Range	10mA/30mA/100mA/400mA/1.5A/5A/20A					
	Minimum resolution	10 $\mu$ A					
Power	Range	0.01W-12kW					
	Minimum resolution	0.01W					
Frequency	Range	Fundamental frequency range : DC/45Hz-400Hz, Bandwidth : 21kHz, filter 5kHz					
	Minimum resolution	0.01Hz					
Power factor	Range	0.001-1.000					
	Minimum resolution	0.001					
Harmonic Analysis		<input type="checkbox"/> (5% of reading + 0.3% of range)					
Power integral	Range	0-99999kWh					
	Resolution	0.001Wh					
	Accuracy	<input type="checkbox"/> (0.2% of reading + 0.3% of range)					
Power timing	Range	0-9999:59:59					
	Resolution	1s					
	Accuracy	<input type="checkbox"/> ±0.05%					
Measurement speed		3 times / sec DC: 3 times / sec, harmonic function on: 2 times / sec					
Lock function							
Range mode							
Input impedance							
Comparator							
Output							
Communication Interface							
Storage							

# Power Electric Tester

## III. TH342X series multi-channel digital power meter

### Features

- Channel combination: optional 3/4 channels
- AC and DC test
- High stability and consistency: adopt phase-locked loop frequency multiplication synchronization control and power synchronization setting
- High resolution display: 7-inch 800x600 resolution touch screen, support mouse operation
- Display screenshot function
- Broadband input: 45Hz-420Hz, suitable for most power systems on the market
- Embedded system: equipped with embedded operating system, human-computer interaction is more flexible and friendly
- Comparison function: provide comparison output of 8 comparison channels, and the output mode is programmable
- Harmonic analysis: controllable analysis parameters, providing list display and bar graph display
- Waveform display: input signal waveform/integrated power waveform
- Vector display: vector display of input signal
- Flexible energy integration control: provide continuous time control and manual control the running and stopping of energy integration
- File storage: relatively powerful file system, compatible with most U disks
- Protocol: SCPI instruction set and MODBUS instruction analysis

### Application

- Power supply: AC power supply, DC power supply, linear power supply, switching power supply, inverter
- New energy: solar batteries, new power cars, electric bicycles



RS232	USB HOST	USB DEVICE	LAN	RS485
standard	standard	standard	standard	option

Shelf volume: 215mm(W)x132mm(H)x441mm(D)

Dimensions: 236mm(W)x154mm(H)x475.5mm(D)

Net weight: 8.1kg

- Test and analysis of electrical parameters of electrical equipment such as household appliances, industrial electrical appliances, and various electronic loads
- Automation equipment integration test

### Specifications

Model	TH3421					TH3422											
Number of channels	4					4											
Display	7 inch (800x480) color TFT resistive touch screen																
Wiring mode	One-phase two-wire (1P2W)		One-phase three-wire (1P3W)		Three-phase three-wire (3P3W)		Three-phase four-wire (3P4W)		Three-voltage three-current (3V3A)								
Basic features	AC	<input checked="" type="checkbox"/>							<input checked="" type="checkbox"/>								
	DC		<input checked="" type="checkbox"/>						<input checked="" type="checkbox"/>								
	Precision type		<input checked="" type="checkbox"/>						<input checked="" type="checkbox"/>								
	Micro current		<input type="checkbox"/>						<input checked="" type="checkbox"/>								
	Harmonic analysis		<input checked="" type="checkbox"/>						<input checked="" type="checkbox"/>								
Display mode	Data		<input checked="" type="checkbox"/>						<input checked="" type="checkbox"/>								
	Integration data		<input checked="" type="checkbox"/>						<input checked="" type="checkbox"/>								
	Waveform graph		<input checked="" type="checkbox"/>						<input checked="" type="checkbox"/>								
	Vector analysis		<input checked="" type="checkbox"/>						<input checked="" type="checkbox"/>								
	Histogram		<input checked="" type="checkbox"/>						<input checked="" type="checkbox"/>								
Basic accuracy		0.15% reading + 0.2% range + 1digit															
Voltage	Range	5V-75V/150V/300V/600V (Input impedance: 3MΩ)															
	Resolution	0.01V															
Current	Range	10mA/30mA/100mA/400mA (Input impedance: 200mΩ)		1mA/3mA/10mA/40mA (Input impedance: 2Ω)													
	Minimum resolution	1.5A/5A/20A (Input impedance: 4mΩ)		150mA/500mA/2A (Input impedance: 40mΩ)													
Power	Range	10μA		1μA													
	Minimum resolution	5mW-12kW		0.5mW-1.2kW													
Frequency	Range	0.01mW		0.001mW													
	Minimum resolution	0.01Hz		Fundamental Frequency range: DC/45Hz-420Hz, Bandwidth: 21kHz, filter 5kHz		Minimum resolution											
Power factor	Range	-1.000-1.000															
	Minimum resolution	0.001															
Harmonic analysis		± (5% reading + 0.3% range)															
Energy integration	Range	0-99999kWh															
	Resolution	0.001Wh															
	Accuracy	±(0.2% reading + 0.3% range)															
Energy timing	Range	0-9999: 59: 59															
	Resolution	1s															
	Accuracy	±0.05%															
Measuring speed		about 7 times/s, harmonic/waveform function is ON: 4 times/s															
Lock function		Data lock															
Range method		Auto/Manual															
Input impedance		≥3MΩ( Voltage input)															
Comparator		Over-limit sound and light alarm															
Output		8 channel programmable relay output															
Communication interface		RS232C/RS485, USB DEVICE, USB HOST, LAN, HANLDER, WIFI(support RTL8192 and MT7601 drive network card)															
Storage		USB waveforms, setting files															

# Power Electric Tester

## III. TH343X TH344X series multi-channel digital power meter

### Features

- Channel: 1/3/4
- AC/DC: Support AC and DC input test
- Soft start: using soft power switch design
- High-resolution display: 7 inches, 800×600 resolution, capacitive touch screen, support mouse operation
- Provide screenshot operation
- Broadband input: 0.1Hz-100kHz, suitable for most power systems on the market
- Embedded system: equipped with embedded operating system, the human-computer interaction is more flexible and friendly
- Comparison function: Provides 8 comparison channels for comparison output, and the output mode is programmable
- Harmonic analysis: analysis parameters are controllable, and list display and bar graph display are provided
- Waveform display: Provides basic input signal waveform display function and integrated power waveform display
- Vector display: Provide a vector display of the input signal
- Flexible energy integral control: provide continuous time control and manual control of energy integral run and stop operations
- File storage: a relatively powerful file system, compatible with most U disks (FAT format)
- Abundant interfaces: USB HOST, USB DEVICE, LAN, HANDLER, RS232/RS485 (choose one of two)
- Communication protocol: support SCPI command set and ModBus command parsing



RS232	USB HOST	USB DEVICE	LAN	RS485
standard	standard	standard	standard	option

Shelf volume: 215mm(W)x132mm(H)x441mm(D)

Dimensions: 236mm(W)x154mm(H)x475.5mm(D)

Net weight: 8.1kg

### Application

- Motors, transformers
- Electronic production design
- Lighting
- Aerospace and military industry
- Network communication
- Audio and video equipment
- Monitoring equipment
- Source class device
- Test and analysis of electrical parameters of AC power supply, DC power supply, linear power supply, switching power supply, and inverter and other source output equipment
- Load equipment
- Test and analysis of electrical parameters of various types of household appliances, industrial appliances, various electronic loads and other electrical equipment

### Specifications

Model	TH3431	TH3433	TH3434	TH3441	TH3443	TH3444
Number Of Channels	1	3	4	1	3	4
Display	7-Inch (800x480) Color TFT Resistive Touch Screen					
Wiring Mode	One-Phase Two-Wire (1P2W) Three-Phase Three-Wire (3P3W) Three-Phase Four-Wire (3P4W) Three-Voltage Three- Current (3V3A)	One-Phase Two-Wire (1P2W) One-Phase Three-Wire (1P3W) Three-Phase Three-Wire (3P3W) Three-Phase Four-Wire (3P4W) Three-Voltage Three- Current (3V3A)	One-Phase Two-Wire (1P2W) Three-Phase Three-Wire (3P3W) Three-Phase Four-Wire (3P4W) Three-Voltage Three- Current (3V3A)	One-Phase Two-Wire (1P2W) One-Phase Three-Wire (1P3W) Three-Phase Three-Wire (3P3W) Three-Phase Four-Wire (3P4W) Three-Voltage Three- Current (3V3A)	One-Phase Two-Wire (1P2W) One-Phase Three-Wire (1P3W) Three-Phase Three-Wire (3P3W) Three-Phase Four-Wire (3P4W) Three-Voltage Three- Current (3V3A)	One-Phase Two-Wire (1P2W) One-Phase Three-Wire (1P3W) Three-Phase Three-Wire (3P3W) Three-Phase Four-Wire (3P4W) Three-Voltage Three- Current (3V3A)
Basic Features	AC DC Precision Type Micro Current Harmonic Analysis Electric Energy Test	Y Y Y Y Y		Y Y		
Display Mode	Data Integration Data Waveform Graph Vector Analysis Histogram	Y Y Y Y Y		Y Y Y Y		
Basic Accuracy (One Year)						
Voltage	Basic Accuracy Resolution	0.15% Reading + 0.2% Range 0.001V			Y	
Current	Basic Accuracy Resolution	± (0.15% Reading + 0.1% Range) 0.1mA		1mA		
Frequency Range		Voltage/Current Accuracy				
DC		± (0.1% Reading + 0.2% Range)				
0.1Hz ≤ Freq < 45Hz		± (0.1% Reading + 0.2% Range)				
45Hz ≤ Freq < 66Hz		± (0.1% Reading + 0.1% Range)				
66Hz ≤ Freq < 1khz		± (0.1% Reading + 0.2% Range)				

# Power Electric Tester

## III. TH343X TH344X series multi-channel digital power meter

### Specifications

1khz ≤ Freq < 10khz	± ((0.07*Freq) % Reading +0.3% Range)	
10khz ≤ Freq ≤ 100khz	± (0.5% Reading +0.5% Range) ± [0.04*(Freq - 10k)] % Reading	
Input		
Voltage	Scope	1V - 600V
	Range	15V/30V/60V/150V/300V/600V
	Minimum Resolution	0.001V
	Input Impedance	2MΩ
	Allowed Max Input	1000V (1S) 700V(Continuous)
Current	Scope	0.01mA - 2A
	Range	0.5mA/1mA/2mA/5mA/10mA/20mA
	Input Impedance	4Ω
	Range	0.05A/0.1A/0.2A/0.5A/1A/2A
	Input Impedance	40mΩ
	Minimum Resolution	0.1uA
	Allowed Max Input	3A(1S) 2A(Continuous)
Power	Range	0.01mW - 1.2kW
	Minimum Resolution	0.001mW
		0.01mW
Frequency	Range	Fundamental Frequency Range: DC/0.1Hz - 100kHz, Filter 500Hz
	Minimum Resolution	0.01Hz
Power Factor	Range	- 1.000 - 1.000
	Minimum Resolution	0.001
Harmonic Analysis	Range	10Hz-1.2kHz
	Accuracy	± (5% Reading +0.3% Range)
Energy Integration	Range	0 - 99999kWh
	Resolution	0.001Wh
	Accuracy	± (0.2% Reading +0.3% Range)
Energy Timing	Range	0 - 9999: 59: 59
	Resolution	1s
	Accuracy	± 0.05%
Update Rate	Optional 0.1s/0.25s/0.5s/1s/2s/10s/20s	
Lock Function	Data Lock	
Range Method	Auto/Manual	
Input Impedance	≥ 2MΩ (Voltage Input)	
Comparator	Over-Limit Sound And Light Alarm	
Output	8 Channel Programmable Relay Output	
Measurement Assistance Function		
Data Buffer Storage Function	The Test Results Are Stored In A U Disk, And Statistical Analysis Can Be Performed On The PC Side	
Save/Load Function	The Saving Of Setting Data Is Divided Into Measurement Parameter Setting And System Parameter Setting	
Keyboard Lock Function	Front Panel Keys And Touch Screen Operations Can Be Locked To Effectively Prevent Misoperation	
Communication Interface	Serial Communication	RS232C/RS485 Optional
	USB HOST	Universal Serial Bus Socket, Type A; FAT16/FAT32 Format. U Disk Storage Or Designated Wireless Network Card (WIFI Supports RTL8192 And MT7601) And Other Equipment Support
	USB DEVICE	Universal Serial Bus Socket, Small Type B (4 Contact Positions); Compatible With USBTMC - USB488 And USB2.0, Female Connector For Connecting External Controllers. Optional CDC Mode Or TMC Mode.
	LAN	10/100baseT Ethernet, 8 Pins, Stable Communication.
	HANDLER	8 Channel Programmable Relay Output
Storage	USB Waveform, Setting File	
Power Supply	AC220V± 10%, 50/60Hz± 5%, Soft Power Switch	
Size W*H*D	Working Size	236mm*154mm*475.5mm
	Shelf Size	215mm*132mm*441mm
Weight	8.1kg	

# Safety Tester/Hipot Tester

## IV. TH9130 Series Multifunction Safety Compliance Analyzer

### Features

- 7-inch capacitive touch screen, 800×480 resolution Linux operating system
- Seven-in-one comprehensive test system with the following functions:
  - 1) AC withstand voltage test
  - 2) DC withstand voltage test
  - 3) Insulation resistance test
  - 4) Ground bond test
  - 5) Continuity test
  - 6) Leakage current test
  - 7) Electrical performance test
- 500VA power AC withstand voltage design
- Maximum voltage 6kV for Insulation resistance test
- Leakage current supports a variety of human body impedance simulation resistance (MD)
- 500VA high-power AC power output (only TH9130, TH9131 this function is optional)
- Open/short circuit detection OSC
- ARC detection function
- Crash voltage test function
- Single screen display test mode, time, voltage, current, resistance value, test steps
- List display function: Simultaneously display the test results of multi-step settings and sequential execution
- Storage: 100 files, 50 steps/file
- Lock on fail



TH9130 Series

Dimension(mm):430mm(W)x132mm(H)x550mm(D)  
Weight: 40kg

### Application

- Comprehensive electrical performance test and analysis of household appliances
- Comprehensive test and analysis of lighting appliances
- Motor comprehensive analysis test
- Test and analysis of high-power electrical appliances
- Comprehensive test and analysis of electronic components
- Medical electrical comprehensive test analysis

### Specifications

Model	TH9130	TH9131	TH9130A	TH9131A		
Withstand Voltage Test						
Output Voltage	AC	Range	0.05 - 5.0kV			
		Waveform	50/60Hz±0.1% Sine Wave			
		Output Power	500VA (5.0kV/100mA)	200VA		
	DC	Range	0.05 - 6.0kV	500VA		
		Output Power	150VA (6.0kV/25mA)	120VA		
		Load Change Rate	±(1% set value+10V) (Rated power)	150VA		
Output Current	Voltage Resolution			2V		
	Voltage Accuracy			±(1% set value+5V)		
	AC	Range	0.001mA - 120mA	0.001mA - 40mA		
			0.001mA - 100mA	0.001mA - 40mA		
		Resolution	0.001mA	0.001mA - 120mA		
		Accuracy	120mA	0.1mA-120.0mA ± (1% Reading +0.6mA)		
			30mA	0.01mA-29.99mA ± (1% Reading +0.15mA)		
			3mA	0.001mA-2.999mA ± (1% Reading +0.015mA)		
	DC	Range	0.0001mA - 25mA	0.0001mA - 20mA		
			0.0001mA - 20mA	0.0001mA - 25mA		
		Resolution	0.1μA	0.0001mA - 20mA		
		Accuracy	25mA	0.01mA-25.00mA ± (1% Reading +0.12mA)		
			3mA	0.001mA-2.999mA ± (1% Reading +0.015mA)		
	5.1μA			0.1μA-299.9μA ± (1% Reading +1.5μA)		
Time Setting	Testing time		0.3 - 999s, 0 means continuous testing			
	Rise Time/ Fall time		0.1 - 999s, 0 means off			
	Waiting time		0.1 - 999s, 0 means off (only DC withstand voltage)			
ARC Detection	AC		1.0mA - 20.0mA	1.0mA - 20.0mA	1.0mA - 20.0mA	
	DC		1.0mA - 10.0mA			

# Safety Tester/Hipot Tester

## IV. TH9130 Series Multifunction Safety Compliance Analyzer

Maximum short circuit current (AC test)	200mA	80mA	200mA	80mA			
Quick discharge function	Automatic discharge after test (DCW)						
Insulation Resistance Test							
Voltage	Output		DC:0.05 - 6.0kV				
	Resolution		2V				
	Accuracy		±(1% Reading +5V)				
Resistance	Test Range		0.05MΩ - 50.0GΩ				
	Accuracy	1MΩ - 1GΩ	±(3% Reading +1M)				
		V≥500V	1GΩ - 10GΩ	±(7% Reading +0.2G)			
		10GΩ - 50GΩ	±(10% Reading +0.5G)				
Time Setting	V<500V	1MΩ - 1GΩ	±(5% Reading +100V/Vs*10M)				
		Testing time	0.3 - 999s, 0 means continuous testing				
		Rise Time/ Fall time	0.1 - 999s, 0 means off				
Waiting time		0.1 - 999s, 0 means off					
Quick discharge function		Automatic discharge after test					
AC Ground Bond Test							
Output Current	Range		1.00 - 40.00A				
	Resolution		0.01A				
	Accuracy		±(2% set value +2 Digit)				
Output Voltage	Range		3.00 - 8.00V				
	Resolution		0.01V				
	Accuracy		±(2% set value +3 Digit)				
Test Frequency		50/60Hz±0.1%					
Output Regulation		±(1% Output Value+0.02A)					
Resistance Test	Range and Accuracy	1.00 - 3.00A	0 - 600mΩ± (3% Reading +3 Digit)				
		3.01 - 10.00A	0 - 600mΩ± (2% Reading +2 Digit)				
		10.01 - 30.00A	0 - 200mΩ± (2% Reading +2 Digit)				
		30.01 - 40.00A	0 - 150mΩ± (2% Reading +2 Digit)				
Test Time		0.5 - 999s, 0 means continuous testing					
Continuity test							
Test Current	0.0001A - 0.1A		0.00 - 10000Ω				
Resistance Accuracy	0 - 1000Ω		± (1% Reading +3 Digi)				
	1001 - 10000Ω		± (1% Reading +10 Digi)				
Test Time		0.3 - 999s, 0 means continuous testing					
Electrical performance test							
Voltage Test	Range		0.0 - 277.0V				
	Resolution		0.1V				
	Accuracy		± (1.5% Reading +2 Digit) (30 - 277V)				
Current Test	Range		0.00 - 16.00A				
	Resolution		0.01A				
	Accuracy		± (2% Reading +2 Digit)				
Power Test	Range		0 - 4500W				
	Resolution		1W				
	Accuracy		± (5% Reading +3W)				
Power Factor	Range		0.000 - 1.000				
	Resolution		0.001				
	Accuracy		± (8% Reading +2 Digit)				
Leakage Current	Range		0.00 - 10.00mA				
	Resolution		0.01mA				
	Accuracy		± (2% Reading +2 Digit)				
Test Time		0.1 - 999s, 0 means continuous testing					
Waiting Time		0.2 - 999s					

# Safety Tester/Hipot Tester

## IV. TH9130 Series Multifunction Safety Compliance Analyzer

Leakage Current Test				
Input Voltage	Range	0 - 277Vac, 16Aac Max		-----
	Accuracy	$\pm (1.5\% \text{ Reading} + 2 \text{ Digit})$ (30 - 277V)		-----
Leakage Current	Test Range	0.0 $\mu$ A - 10.00mA		-----
	Test Frequency	DC, 15Hz - 1MHz		-----
Test Time	AC+DC	0.5 - 999s, 0 means continuous testing		-----
	AC/DC	0.1 - 999s, 0 means continuous testing		-----
Waiting Time		AC+DC	0.5 - 999s	-----
		AC/DC	1.8 - 999s Auto Range 1.3 - 999s Fixed Range	-----
Body Impedance Network (MD)	A:	UL544NP, UL484, UL1363, UL923, UL471, UL867, UL697		-----
	B:	UL544P		-----
	C:	UL2601-1, IEC60601-1, EN60601-1, GB9706.1		-----
	D:	UL1563		-----
	E:	IEC60990 Fig4U2, IEC60950-1, IEC60335-1, IEC60598-1, UL484, IEC60065, IEC61010, IEC62368-1, GB/T12113, GB4943.1, GB4706.1, GB3187.1, GB7000.1, GB/T42125.1, GB4793.1		-----
	F:	IEC60990 Fig5U3, IEC60598-1, GB/T12113, GB4943.1, GB31897.1, GB7000.1		-----
	G:	Frequency Detection 1k $\Omega$		-----
	H	GB4793.1, GB/T42125.1, IEC61010-1		-----
MDA-G Devices precision	Resistance Precision	$\pm 1\%$		-----
	Capacitance Precision	$\pm 5\%$		-----
MD Voltage Protection		30V Peak Value or 30Vdc		-----
30V Peak Value or 30Vdc		G - L, PH - L, PH - PL		-----
Leakage Current Range eEffective Value RMS	MD main resistance	Range		-----
	0.5k $\Omega$ / 1k $\Omega$ / 1.5k $\Omega$	0.0 $\mu$ A - 10.00mA		-----
	Resolution	Auto Range & Fixed Range 1 - 2 & Fixed Range 3 (1k&1.5kMD)	<1000 $\mu$ A	0.1 $\mu$ A
			1000 $\mu$ A - 8400 $\mu$ A	1 $\mu$ A
			>8400 $\mu$ A	0.01mA
		Fixed range 3 (0.5kMD) & Fixed range 4 - 6	<8400 $\mu$ A	1 $\mu$ A
			>8400 $\mu$ A	0.01mA
	Range Accuracy	Range	Test Mode	Frequency
		Range 1 - 5	DC	$\pm (2\% \text{ Reading} + 3 \text{ Digit})$
			15Hz < f < 100kHz	$\pm (2\% \text{ Reading} + 3 \text{ Digit})$
			100kHz $\leq$ f $\leq$ 1MHz	$\pm (5\% \text{ Reading}) > 10.0\mu\text{A}$
		AC only	15Hz < f $\leq$ 30Hz	$\pm (3\% \text{ Reading} + 5 \text{ Digit})$
			30Hz < f < 100kHz	$\pm (2\% \text{ Reading} + 3 \text{ Digit})$
			100kHz $\leq$ f $\leq$ 1MHz	$\pm (5\% \text{ Reading}) > 10.0\mu\text{A}$
		DC only	DC	$\pm (2\% \text{ Reading} + 3 \text{ Digit}) > 10.0\mu\text{A}$
	Range 6	AC+DC	DC	$\pm (5\% \text{ Reading}) > 10.0\mu\text{A}$
		15Hz < f < 100kHz		
		AC only	15Hz < f $\leq$ 30Hz	
			30Hz < f < 100kHz	
		DC only	DC	
Leakage Current Range Peak Value PEAK	MD main resistance	Range		-----
	0.5k $\Omega$ / 1k $\Omega$ / 1.5k $\Omega$	0.0 $\mu$ A - 10.00mA		-----
	Resolution	Auto Range & Fixed Range 1 - 2 & Fixed Range 3 (1k&1.5kMD)	<1000 $\mu$ A	0.1 $\mu$ A
			1000 $\mu$ A - 8400 $\mu$ A	1 $\mu$ A
			>8400 $\mu$ A	0.01mA
		Fixed range 3 (0.5kMD) & Fixed range 4 - 6	<8400 $\mu$ A	1 $\mu$ A
			>8400 $\mu$ A	0.01mA
	Range Accuracy	Range	Test Mode	Frequency
		Range 1-5	DC	$\pm (2\% \text{ Reading} + 2\mu\text{A})$
			15Hz $\leq$ f $\leq$ 1MHz	$\pm (10\% \text{ Reading} + 2\mu\text{A})$
			AC only	$\pm (10\% \text{ Reading} + 2\mu\text{A})$
		Range 6	AC+DC	$\pm (2\% \text{ Reading} + 3 \text{ Digit})$
			15Hz < f < 100kHz	$\pm (10\% \text{ Reading} + 2 \text{ Digit})$
			AC only	$\pm (10\% \text{ Reading} + 2 \text{ Digit})$
			15Hz < f < 100kHz	$\pm (10\% \text{ Reading} + 2 \text{ Digit})$

# Safety Tester/Hipot Tester

## IV. TH9130 Series Multifunction Safety Compliance Analyzer

MD main resistance				Range	-----	
0.5kΩ / 1kΩ / 1.5kΩ				0.0mV - 15.00V	-----	
Leakage Voltage Range Effective Value RMS	Resolution	Auto Range & Fixed Range 1 - 2 & Fixed Range 3 (1k&1.5kMD)	<1000mV	0.1mV	-----	
		1000mV - 8400mV	1mV	-----	-----	
		>8400mV	0.01V	-----	-----	
	Range Accuracy	Fixed range 3 (0.5kMD) & Fixed range 4 - 6	<8400mV	1mV	-----	
		>8400mV	0.01V	-----	-----	
		Range	Test Mode	Frequency	Accuracy	
Leakage Voltage Range Peak Value PEAK	Range1-5	AC+DC	DC	± (2%Reading+3Digit)	-----	
			15Hz<f<100kHz	± (2%Reading+3Digit)	-----	
			100kHz≤f≤1MHz	± (5%Reading) >10.0mV	-----	
		AC only	15Hz<f≤30Hz	± (3%Reading+5Digit)	-----	
			30Hz<f<100kHz	± (2%Reading+3Digit)	-----	
			100kHz≤f≤1MHz	± (5%Reading) >10.0mV	-----	
	Range6	DC only	DC	± (2%Reading+3Digit) >10.0mV	-----	
		AC+DC	DC		-----	
			15Hz<f<100kHz		-----	
		AC only	15Hz<f≤30Hz	± (5%Reading) >10.0mV	-----	
			30Hz<f<100kHz		-----	
		DC only	DC		-----	
MD main resistance				Range	-----	
0.5kΩ / 1kΩ / 1.5kΩ				0.0mV - 15.00V	-----	
Leakage Voltage Range Peak Value PEAK	Resolution	Auto Range & Fixed Range 1 - 2 & Fixed Range 3 (1k&1.5kMD)	<1000mV	0.1mV	-----	
		1000mV - 8400mV	1mV	-----	-----	
		>8400mV	0.01V	-----	-----	
	Range Accuracy	Fixed range 3 (0.5kMD) & Fixed range 4 - 6	<8400mV	1mV	-----	
		>8400mV	0.01V	-----	-----	
		Range	Test Mode	Frequency	Accuracy	
OSC Open and Short Circuit Detection	Range1-5	AC+DC	DC	± (2% Reading+2mV)	-----	
			15Hz≤f≤1MHz	± (10% Reading+2mV)	-----	
			AC only	15Hz≤f<1MHz	± (10% Reading+2mV)	
		AC+DC	DC	± (2% Reading+3 Digit)	-----	
			15Hz<f<100kHz	± (10% Reading+2 Digit)	-----	
		AC only	15Hz<f<100kHz	± (10% Reading+2 Digit)	-----	
	Range6					
OSC Open and Short Circuit Detection						
Sampling Standard Capacitance Range		0.001 - 40nF				
Open circuit judgment range		10% - 100%				
Short circuit judgment range		100% - 500%				
Safety Protection Function						
Electric Shock Protection		0.5mA±0.25mA Option: on or off				
Start Protection Interlock		The pin is connected to the low level to allow the high voltage output.				
Panel operation protection		key lock				
Alarm indication		Pass: short tone, green light; Fail: long tone, red light				
Electrical and leakage power short circuit protection		23A <sub>RMS</sub> or Electric shock 68A <sub>PEAK</sub>				
Hipot and ground synchronous output test		5kVac/30mAac and 30Aac/150mΩ(TH9131/TH9131A), 5kVac/50mAac and 30Aac/150mΩ(TH9130/TH9130A)				
Storage and Interface						
Internal memory		Can save 100 files, 50 steps per file.				
Standard interface		RS232,USB DEVICE,USB HOST,LAN,HANDLER				
Optional interface		GPIB				
Ambient temperature and humidity						
Parameter Comparasion Temperature		18°C - 28°C, humidity:30% - 70%RH				
Normal Working Temperature		0°C - 45°C, humidity:20% - 90%RH				
Storage Ambient Temperature		-10°C - 55°C, humidity:<80%RH				
General Information						
Power Supply		100V - 240VAC, 47Hz - 63Hz				
Power		No load: <100W, Rated power:1200W				
Size (W) × (H) × (D)		430mm×132mm×550mm				
Weight		40kg	38kg	34kg	32kg	

# Safety Tester/Hipot Tester

## IV. TH9130S/TH9131S Series Multifunction Safety Compliance Analyzer

### Features

- 7-inch capacitive touch screen, 800 x 480 resolution Linux
- operating system, Chinese and English interface
- Five-in-one integrated test system, single machine to achieve all the safety testing needs:
  - 1) High Power AC Withstand Voltage Test
  - 2) DC Withstanding Voltage Test
  - 3) Insulation Resistance Test
  - 4) Ground Resistance Test
  - 5) Conductivity test
- 500VA power AC withstand voltage design
- Insulation resistance test up to 6kV
- Hardware contact check (CK) function
- Open Short Circuit Detection OSC
- Arc detection ARC function
- Crash voltage test function
- Four/eight channel output
- Single screen displays test mode, time, voltage, current, resistance value, and test steps
- List display function: Simultaneously display test results of multi-step setup and sequential execution
- Storage: 100 files, 50 steps / file
- Lock on fail



RS232	USB HOST	USB DEVICE	HANDLER	LAN
standard	standard	standard	standard	standard

TH9130S Series

Dimension(mm):430mm(W)x132mm(H)x550mm(D)  
Weight: 40kg

### Application

- Comprehensive electrical performance test analysis of household electrical
- Lighting Appliance Comprehensive Test and Analysis
- Comprehensive analysis and testing of electric motors
- Test and analysis of high-power electrical appliances
- Comprehensive test and analysis of electronic parts

### Specifications

Model	TH9130S				TH9131S										
Scanning module	TH9130S-004	TH9130S-001	TH9130S-002	TH9130S-003	TH9130S-004	TH9130S-001	TH9130S-002	TH9130S-003							
Functions & Channels	High voltage: ACW, DCW, IR	4	8	8	<input checked="" type="checkbox"/>	4	8	8							
	CK Contact Check	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							
	Ground resistance (GB)	Channel	4	8	<input checked="" type="checkbox"/>	8	4	8							
		Wire	Four-wire	Two-wire	<input checked="" type="checkbox"/>	Four-wire	Four-wire	Two-wire							
	Conduction		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							
Pressure Resistance Test															
Output Voltages	AC	Range	0.05 - 5.0kV												
		Waveform	50/60Hz±0.1% Sine wave												
		Output power	500VA (5.0kV/100mA)			200VA									
	DC	Range	0.05 - 6.0kV												
		Output power	150VA (6.0kV/25mA)			120VA									
current test	Load variation rate		± (1% set value+10V) (Rating power)												
	Resolution		2V												
	Accuracy		± (1% set value+5V)												
	AC	Range	V≤4kV	0.001mA - 120mA	0.001mA -40mA										
			V>4kV	0.001mA - 100mA	0.001mA -40mA										
		Resolution	0.001mA												
		Accuracy	120mA	0.1mA-120.0mA	± (1% readout value+0.6mA)										
Time Setting	DC	30mA	0.01mA-29.99mA	± (1% readout value+0.15mA)											
		3mA	0.001mA-2.999mA	± (1% readout value+0.015mA)											
		Range	V≥1.5kV	0.0001mA - 25mA	0.0001mA - 20mA										
	AC	V<1.5kV	0.0001mA - 20mA	0.0001mA - 20mA	0.0001mA - 20mA										
		Resolution	0.1μA												
Arc Detection	DC	25mA	0.01mA - 25.00mA	± (1% readout value+0.12mA)											
		3mA	0.001mA - 2.999mA	± (1% readout value+0.015mA)											
		5.1μA	0.1μA-299.9μA	± (1% readout value+1.5μA)											
	Testing time		0.3 - 999s, 0 for continuous test												
Maximum short-circuit current (AC test only)	Rising time		0.1 - 999s, 0 for closed												
	Falling time		0.1 - 999s, 0 for closed												
	Waiting time		0.1 - 999s, 0 for closed (DC withstand voltage only)												
Fast discharge function	AC		1.0mA - 20.0mA												
	DC		1.0mA - 10.0mA												
Maximum short-circuit current (AC test only)		200mA			80mA										
Fast discharge function		Automatic discharge after test (DCW)													

# Safety Tester/Hipot Tester

## IV. TH9130S/TH9131S Series Multifunction Safety Compliance Analyzer

### Specifications

Insulation resistance test			
Voltage	Outputs	DC:0.05 - 6.0kV	
	Resolution	2V	
	Accuracy	± (1% readout value+5V)	
Resistance	Test Range	0.05MΩ - 50.0GΩ	
	V≥1kV	1MΩ - 1GΩ ±(3% readout value+1M)	
		1GΩ - 10GΩ ±(7% readout value+0.2G)	
		10GΩ - 50GΩ ±(10% readout value+0.5G)	
	500V≤V<1kV	0.1MΩ - 1GΩ ±(3% readout value+1M)	
		1GΩ - 10GΩ ±(7% readout value+0.2G)	
		10GΩ - 50GΩ ±(10% readout value+0.5G)	
	V<500V	1MΩ - 1GΩ ±(5% readout value+100V/Vs*10M)	
	Testing time	0.3 - 999s, 0 for continuous test	
Time Setting	Rising time	0.1 - 999s, 0 for closed	
	Falling time	0.1 - 999s, 0 for closed	
Waiting time		0.1 - 999s, 0 for closed	
Fast discharge function			
AC Ground Resistance Testing			
Output Current	Range	1.00 - 40.00A	
	Resolution	0.01A	
	Accuracy	± (2% set value+2 words)	
Test Voltage	Range	3.00 - 8.00V	
	Resolution	0.01V	
	Accuracy	± (2% set value+3 words)	
Test Frequency			
Output Adjustment Ratio			
Resistance Test	Range	1.00 - 10.00A 0 - 600mΩ	
		10.01 - 30.00A 0 - 200mΩ	
		30.01 - 40.00A 0 - 150mΩ	
	Accuracy	1.00 - 3.00A 0 - 600mΩ± (3% readout value+3 words)	
		3.01 - 10.00A 0 - 600mΩ± (2% readout value+2 words)	
		10.01 - 30.00A 0 - 200mΩ± (2% readout value+2 words)	
		30.01 - 40.00A 0 - 150mΩ± (2% readout value+2 words)	
Testing Time			
Conductivity Test			
Test Current	0.1A	0.00 - 10.00Ω	
	0.01A	10.1 - 100.0Ω	
	0.001A	101 - 1000Ω	
	0.0001A	1001 - 10000Ω	
Resistance Test Accuracy	0 - 1000Ω	± (1% readout value+3 words)	
	1001 - 10000Ω	± (1% readout value+10 words)	
Testing time			
OSC open/short circuit detection			
Sampling standard capacitance range		0.001 - 40nF	
Open Circuit Judgment Range		10% - 100%	
Short-circuit judgment range		100% - 500%	
Safety and Security Functions			
Electric shock protection		0.5mA±0.25mA selectable: On or Off	
Startup Protection Interlock		High-voltage output is allowed only if the pin is connected low	
Panel Operated Protection		key lock	
Alarm indication		Pass: short tone, green light; Fail: long tone, red light	
Synchronized output test for withstand voltage and grounding		5kVac/30mAac and 30Aac/150mΩ	
Storage and Interface			
Internal storage		Up to 100 files can be stored and each file can be edited with 50 steps	
Standard Interface		RS232, USB DEVICE, USB HOST, LAN, HANDLER	
Optional Interface		GPIB	
Ambient Temperature & Humidity			
Parameter Comparison Temp.		18°C - 28°C, humidity:30% - 70%RH	
Normal operating temperature		0°C - 45°C, humidity:20% - 90%RH	
Storage Ambient Temperature		-10°C - 55°C, humidity:<80%RH	
General Indicator			
Power supply		100V - 240VAC, 47Hz - 63Hz	
Power		No-load:<100W, Rated power:1200W	
Dimension (W) × (H) × (D)		430mm×132mm×550mm	
Weight		40kg 40kg 40kg 40kg 38kg 38kg 38kg 38kg	

# Safety Tester/Hipot Tester

## IV. TH9120/A/D Hipot Tester

### Features

- Withstand voltage test: AC: 10kV/20mA/200VA  
DC: 12kV/10mA/120VA
- Breakdown voltage test: AC: 0.05-10.0kV, resolution 10V  
DC: 0.05-12kV, resolution 10V
- Insulation resistance test: 0.1MΩ-50.0GΩ
- ARC detection function
- Open and short circuit detection function OSC (only TH9120/A)
- High resolution: 7 inches 800×480 dots, TFT-LCD display
- One-click screenshot function
- Rear panel output function facilitates automated testing of production lines
- Storage: 100 files, up to 50 steps per file
- Contact check function

NEW



RS232	USB HOST	USB DEVICE	HANDLER	LAN	GPIB
standard	standard	standard	standard	standard	option

Dimension(mm):430mm(W)x132mm(H)x500mm(D)

Weight: 21kg

### Application

- High withstand voltage test  
High-voltage optocouplers, high-voltage relays, high-voltage switches and other high-insulation devices
- Electronic components  
Capacitors, coils, cores, chokes, filters, etc.
- Electrical products  
Household appliances, information products, audio-visual equipment, electric heating appliances, lighting equipment

- Non-electrical products  
Withstand voltage and insulation resistance test of wire, non-woven fabric, insulating material, etc.
- New energy vehicles
- Automatic test system

### Specifications

Model	TH9120	TH9120A	TH9120D
Test mode	AC/DC/IR/OSC	AC/OSC	DC/IR
Withstand voltage test			
Output voltage	AC	Voltage range	0.05-10.0kV
		Voltage waveform	50/60Hz ±0.1% Sine wave
		Output power	200VA(10.0kV / 20mA)
	DC	Voltage range	0.05-12.0kV
		Output power	120VA(12.0kV/10mA)
Load change rate	±(1% set value + 10V) (rated power)		
Voltage resolution	2V		
Voltage accuracy	±(1% set value + 0.1% full scale)		
Current test range	AC	Current range	0.001mA-20mA
		Current resolution	0.001mA
		Current accuracy	0.100mA-2.999mA ±(1% reading + 0.5% full scale)
			3.00mA-20.00 mA ±(1.5% reading + 0.5% full scale)
		Current range	0.0001mA-10mA
	DC	Current resolution	0.0001mA-10mA
		Current accuracy	±(1% reading + 0.5% full scale)
Maximum short circuit current	40mA (AC test only)		
Fast discharge function	Automatic discharge after test (DCW)		Automatic discharge after test (DCW)
Insulation resistance test			
Output voltage	DC:0.05-5.0kV	-----	DC:0.05-5.0kV
Voltage resolution	2V	-----	2V
Voltage accuracy	±(1% set value + 0.5% full scale)	-----	±(1% set value + 0.5% full scale)
Resistance test range	0.1MΩ- 50.0GΩ	-----	0.1MΩ- 50.0GΩ

# Safety Tester/Hipot Tester

## IV. TH9110/A Hipot Tester

### Features

- High power: AC 5kV / 100mA / 500VA output
- High security:  
High-voltage floating output design, in line with the safety requirements of EU standards EN50191 (only TH9110)  
Electric shock protection function
- High resolution: 7 inch 800 × 480 dots, TFT-LCD display
- Brand-new operation interface, Chinese and English menu
- ARC detection function
- Contact check function (OSC)
- Breakdown voltage test function
- One-key screen capture function
- One-key recording function
- Rear panel output function to facilitate automated production line testing
- Storage: 100 files, up to 50 steps per file

### Application

- Winding devices  
Transformers, generators/motors and other products needing high-power withstand voltage test and analysis, such as different types of motor stator, rotor and other high parasitic capacitance products
- Electronic components  
Capacitors, coils, cores, choke coils, filters and so on
- Electrical products  
Household appliances, information products, audio-visual equipment, electric heating appliances, lighting equipment



RS232	USB HOST	USB DEVICE	HANDLER	LAN	GPIB
standard	standard	standard	standard	standard	option

#### TH9110/A

Dimension(mm): 430(W)×132(H)×500(D)  
Weight: 21kg

- Non-electrical products

Withstand voltage and insulation resistance test for wire, non-woven fabric, insulation materials and so on

- New energy automobile
- Automated test system
- Medical equipment

### Specifications

Model	TH9110	TH9110A	TH9111	TH9111A		
Withstand voltage test						
Output voltage	AC	0.05 - 5kV	Load Variance: 1%	Accuracy: 1%+5V		
	DC	0.05 - 6kV	Load Variance: 1%	Accuracy: 1%+5V		
Current test range	AC	0.001mA - 120mA(Voltage≤4kV); 0.001mA - 100mA(Voltage>4kV) Accuracy: 1% Resolution: 1µA		0.001mA - 40mA Accuracy: 1% Resolution: 0.1µA		
	DC	0.0001mA - 25mA Resolution: 0.1 µA		0.0001mA - 20mA Accuracy: 1% Resolution: 0.1 µA		
Output power		500VA	200VA			
Insulation resistance test						
Output Voltage		DC : 0.05 - 5kV	Resolution: 2V	Accuracy: 1% of set value + 0.1% full scale		
Resistance test range		1MΩ-50.0GΩ	Resolution: 0.1MΩ			
Discharge function		Automatic discharge after the end of the test				
ARC detection	AC	1mA - 20mA				
	DC	1mA - 10mA				
Contact check function		OSC open and short: 600Hz, 0.1s				
Security features						
High voltage floating output		Leakage current <3 mA	-----	Leakage current <3 mA		
Electric shock protection		0.5mA ± 0.25mA				
Other protection		Start protection, panel operation password protection				
Alarm indication		PASS: short tone, green light; FAIL: long tone, red light				
Memory		100 groups, 50 steps per group				
General parameters						
Voltage rise time		0.1s — 999.9s				
Test time setting(AC/DC)		0.3s — 999s				
Voltage fall time		0.1s — 999.9s				
Waiting time (IR)		0.2s — 999.9s				
Time accuracy		±(1%+0.1s)				

# Safety Tester/Hipot Tester

## IV. TH9120/A/D Hipot Tester

Resistance test accuracy	Voltage $\geq 0.5kV$	1M $\Omega$ –1G $\Omega$	$\pm (3\% \text{ reading} + 0.1\% \text{ full scale})$	-----	$\pm (3\% \text{ reading} + 0.1\% \text{ full scale})$
		1G $\Omega$ –10G $\Omega$	$\pm (3\% \text{ reading} + 0.1\% \text{ full scale})$	-----	$\pm (7\% \text{ reading} + 2\% \text{ full scale})$
		10G $\Omega$ –50G $\Omega$	$\pm (10\% \text{ reading} + 1\% \text{ full scale})$	-----	$\pm (10\% \text{ reading} + 1\% \text{ full scale})$
	Voltage $<500V$	0.1M $\Omega$ –1G $\Omega$	$\pm (5\% \text{ reading} + 2\% \text{ full scale})$	-----	$\pm (5\% \text{ reading} + 2\% \text{ full scale})$
Arc detection					
Program setting	AC	1.0mA-20.0mA	-----	-----	-----
	DC	1.0mA-10.0mA	-----	-----	1.0mA-10.0mA
OSC open and short detection					
Sampling standard capacitance range		0.001—40nF	-----	-----	-----
Open circuit judgment range		10%—100%	-----	-----	-----
Short circuit judgment range		100%—500%	-----	-----	-----
Time setting					
Test time		0.3—999s, 0 means continuous test			
Rise time		0.1—999s, 0 means OFF			
Fall time		0.1—999s, 0 means OFF			
Waiting time		0.1—999s, 0 means OFF (DC withstand voltage only)			
Safety protection function					
Shock protection		0.5mA $\pm$ 0.25mA Optional: ON or OFF			
Start protection (Interlock)		When the pin is connected with low terminal, high voltage output is allowed.			
Panel operation protection		Key lock, password			
Alarm indication		PASS: short sound, green light; FAIL: long sound, red light			
Storage and interface					
Internal memory		100 files can be stored and 50 steps can be edited in each file			
Standard interface		RS232, USB DEVICE, USB HOST, LAN, HANDLER			
Optional interface		GPIB			
Ambient temperature and humidity					
Parameter comparison temperature		18°C~28°C, Humidity: 30%~70%RH			
Normal working temperature		0°C~45°C, Humidity: 20%~90%RH			
Storage environment temperature		-10°C~55°C, Humidity:< 80%RH			
General specification					
Power supply		100V~240VAC, 47Hz~63Hz			
Power		No load:< 100W Rated power:300W			
Volume		430mm (W) x 132mm (H) x 500mm (D)			
Weight		21kg			

# Safety Tester/Hipot Tester

## IV. TH9200 Series Hipot Tester

### Features

- TH9201S: 8-channel scanning AC/DC withstand voltage & insulation tester
- TH9201/TH9201B: AC/DC withstand voltage & insulation tester
- TH9201C: AC withstand voltage tester
- 240×64 Dot-matrix graphic LCD display
- Fast discharge and arc detection function
- Body protection function
- Built-in 8-channel matrix scanner for convenient use
- Set voltage rising time, test time, and voltage dropping time randomly for different load, DC withstand voltage current judging & waiting time
- 100 test steps being stored per group, totally 50 groups, and the total testing steps are limited at 500
- Current base number correction function
- Brand new operation interface and humanized panel design
- Abundant interfaces Handler, RS-232C, SCAN, GPIB(optional)



TH9201S



TH9201

### Brief Introduction

TH9201 series AC/DC withstand voltage & insulation tester is a kind of Hipot Tester. Due to simple and compact structure, mature technique, brand new structure and operating interface, the operation becomes more convenient, and more practical functions are included as well. TH9201 series can be widely applied in transformer, device, component especially for winding safety inspection.

### Specifications

Model		TH9201	TH9201S
Eight-way matrix scanner	-----	-----	Have
Withstanding voltage test			
Output voltage	AC	0.05kV - 5.00kV	±2% (50、60Hz optional)
	DC	0.05kV - 6.00kV	±2%
Current test range	AC	0.001mA - 30mA	
	DC	0.1μA - 10mA	
Test accuracy		±(1.0% of reading+5 digit)	
Discharge function		Discharge after test ends (DCW)	
Insulation resistance test			
Output voltage		0.05kV - 1.00kV	±2%
Resistance test range		0.1MΩ - 50GΩ, (Current range within 10nA-10mA)	
Resistance test accuracy		0.1MΩ - 300MΩ	Range±5% +5 digit
		300MΩ - 3GΩ	Range±10% +5 digit
		3GΩ - 50GΩ	Range±20% +5 digit
Discharge function		Discharge after test ends	
Arc detection			
Measurement range	AC	1mA - 15mA	
	DC	1mA - 10mA	
General specification			
Voltage rise-time		0.1s - 999s	
Voltage fall-time		0.1s - 999s	
Voltage wait-time		0.1s - 99.9s(only for DC)	
Interface		RS232, USB, HANDLER, REMOTE I/O , SCAN, GPIB(Options)	

# Safety Tester/Hipot Tester

## IV. TH9320-S4/TH9320-S8 Hipot Tester

### Features

- Output voltage: AC:5kV/20mA; DC:6kV/10mA
- Test voltage of insulation resistance:0.10kV-1.00kV
- Test range of insulation resistance: 1MΩ-1000MΩ
- 480×272 dot-matrix, TFT-LCD display
- Provide 4 channels (-S4), 8 channels (-S8) scan interface
- Rapidly discharging and arc detection
- Randomly set voltage rising time and testing time in 999.9 seconds; Freely set waiting time for insulation resistance
- Hold 20 testing steps; 4 testing modes selectable
- Brand new operation interface and concise interface operation design
- Lock keyboard
- Contact check



TH9320-S8



TH9320-S4

RS232	USB HOST	USB DEVICE	HANDLER	PLC	LAN
standard	standard	standard	standard	standard	option

Dimension(mm):280mm(W)x138mm(H)x428mm(D)

Weight: 18kg

### Specifications

Model	TH9320-S4	TH9320-S8
Withstanding voltage test		
Output voltage	AC 0.05 —5.00kV ± (2% reading+5digits) , (50Hz, 60Hz optional) DC 0.05 —6.00kV ± (2% reading+5digits) Voltage adjustment rate ≤ (1% - 5V) (rated power)	
Current test range	AC 1μA – 20.00mA ±(2% reading+2digits) DC 0.1μA –10.00mA ±(2% reading+2digits) Discharge function Discharge after test ends (DCW)	
Insulation resistance test		
Output voltage	0.10kV – 1.00kV ±(2%reading+2V)	
Resistance test range	1MΩ– 9999MΩ	
Resistance test accuracy	500V-1000V 100V-500V	1MΩ– 1000MΩ ±(5%reading+2digits) ;1000MΩ–9999MΩ ±(10%reading+2digits) 1MΩ– 1000MΩ ±(10%reading+2digits)
Discharge function	Discharge after test ends	
Arc detection		
Measurement range	AC 1 – 9 levels (factory default 5) (20mA, 18mA, 16mA, 14mA, 12mA, 10mA, 7.7mA, 5.5mA, 2.8mA respectively) DC 1 – 9 levels	
General specification		
Memory	20 test files, 20 steps per test file	
Voltage rising time	0.1s – 999.9s	
Test time setting (AC/DC)	0.2s – 999.9s	
Waiting time (IR)	0.2s – 999.9s	
Time Accuracy	±(1%+0.1s)	
Scan interface	4 channels	8 channels

# Safety Tester/Hipot Tester

## IV. TH9310/TH9320 Series Hipot Tester



### Features

- TH9310 series: AC:5kV/10mA; DC:6kV/5mA AC/ DC withstand voltage/insulation resistance tester
- TH9320 series: AC:5kV/20mA; DC6kV/10mA AC/ DC withstand voltage/insulation resistance tester
- TH9310/20: AC/ DC withstand voltage/insulation resistance tester
- TH9310B: AC withstand voltage tester
- 480×272 dot-matrix, TFT-LCD display
- Rapidly discharging and arc detection
- Randomly set voltage rising time and testing time in 999.9 seconds; Freely set waiting time for insulation resistance
- Hold 5 testing steps; 4 testing modes selectable
- Brand new operation interface and concise interface operation design
- Lock keyboard
- PLC interface



RS232	USB HOST	USB DEVICE	HANDLER	SIGNAL	PLC	LAN
standard	standard	standard	standard	standard	standard	option

### TH9310/TH9320 Series

Dimension(mm):280mm(W)x88mm(H)x428mm(D)  
Weight: 11kg (only TH9310 series), 12.311kg (only TH9320 series)

### Brief Introduction

- TH9310/20 series withstand voltage/insulation resistance tester is an economical and intelligent safety tester with the characteristics of small size, light weight, pleasing appearance and easy operation. TH9310/20 series can be widely used in the safety tests of household appliances, transformer, electrical equipments and components.

### Specifications

Model		TH9310/20	TH9310B
Withstanding voltage test			
Output voltage	AC	0.05 —5.00kV ± (2% reading+5digits) , (50Hz, 60Hz optional)	-----
	DC	0.05 —6.00kV ± (2% reading+5digits)	-----
	Voltage adjustment rate	≤ (1% - 5V) (rated power)	-----
Current test range	AC	TH9310: 1μA—10.00mA ±(2% reading+2digits) TH9320: 1μA—20.00mA ±(2% reading+2digits)	-----
	DC	TH9310: 0.1μA—5.00mA ±(2% reading+2digits) TH9320: 0.1μA—10.00mA ±(2% reading+2digits)	-----
	Discharge function	Discharge after test ends (DCW)	-----
Insulation resistance test			
Output voltage		0.10kV—1.00kV ±(2%reading+2V)	-----
Resistance test range		1MΩ—9999MΩ	-----
Resistance test accuracy	500V-1000V	1MΩ—1000MΩ ±(5%reading+2digits) 1000MΩ—9999MΩ ±(10%reading+2digits)	-----
	100V-500V	1MΩ—1000MΩ ±(10%reading+2digits)	-----
Discharge function		Discharge after test ends	-----
Arc detection			
Measurement range		Corresponding current 1mA-20mA	-----
General specification			
Memory	5 groups		
Voltage rising time	0.1s—999.9s		
Test time setting (AC/DC)	0.2s—999.9s		
Waiting time (IR)	0.2s—999.9s		-----
Time Accuracy	±(1%+0.1s)		
Dimension (W×H×D)	280mm×89mm×428mm/10kg		
Interface			
Standard	HANDLER, RS232, USBDRV(PC interface), USBHOST(USB port)		

# Safety Tester/Hipot Tester

## IV. TH9010/A Parallel 8-channel/4-channel Hipot Tester

### Features

- 7-inch 800×480 dot-matrix, TFT-LCD display
- Chinese and English operation interface and concise interface operation design
- 8-channel withstand voltage parallel output and test efficiency increased eight times
- Parallel 8-channels and each channel is non-interfering
- Each channel can be extended by a four-channel scanner
- Support 4 four-channel scanner at most and one instrument can be extended to 128 channels
- Four-channel scanner supports contact check function
- Single output power: AC:5kV/10mA; DC:6kV/5mA
- Insulation resistance test voltage: 0.10kV -1.00kV
- Enhanced security: electric shock protection
- Rapid discharge and arc detection function
- Arbitrarily set voltage rising time and test time in 999.9 seconds; freely set waiting time for insulation resistance
- Key-Lock Function
- Display the PASS/FAIL result of each channel independently and the total result simultaneously
- Store 100 test files and each file can hold at most 20 testing steps



RS232	USB HOST	USB DEVICE	HANDLER	GPIB
standard	standard	standard	standard	option

TH9010

Dimension(mm): 430(W)×177(H)×630(D)

Weight: 40kg



TH90101 8-unit four-channel scan expander  
TH90101A 4-unit four-channel scan expander

### Application

- Automated test system
- Household appliances
- Transformers, motors
- Electrical equipment
- Lighting industry
- New energy vehicles
- Electronic components
- Medical equipment

### Specifications

Model	TH9010	TH9010A
Number of units	8 separate channel	4 separate channel
Withstanding voltage test		
Output voltage	AC 0.10kV — 5.00kV DC 0.10kV — 6.00kV	±2%
Current test	AC 0mA — 10.00mA DC 0UA — 5.00mA	±(2% readings + 5 digits)
Range	Rapid discharge function	Discharge after test ends (DCW)
Insulation resistance test		
Output voltage	0.10kV — 1.00kV	±2%
Resistance test range	0.1MΩ — 10.0GΩ	
Resistance test accuracy	0.10MΩ — 999MΩ ±10% 1.00GΩ — 10.0GΩ ±20%	
Discharge function	Discharge after test ends	
Arc detection		
Test range	Corresponding current	1mA — 20mA
General specification		
Voltage rising time	0.1s — 999.9s	
Test time setting (AC/DC)	0.2s — 999.9s	
Voltage fall time	0.1s — 999.9s	
Waiting time (IR)	0.2s — 999.9s	
Time accuracy	±(1%+0.1s)	
Memory	Store 100 test files and each file can hold at most 20 testing steps	
Interface		
Standard	HANDLER, RS232, USB DRV, USB HOST	

# Safety Tester/Hipot Tester

## IV. TH2883S8-5/TH2883S4-5 Impulse Winding Tester



RS232	USB HOST	USB DEVICE	HANDLER	LAN
standard	standard	standard	standard	standard

### TH2883S8-5/TH2883S4-5

Dimension(mm):400mm(W)x132mm(H)x420mm(D)  
Weight: 15kg

### Features

- Impulse voltage of 100V~5000V
- Two models of 4-channel and 8-channel for selection
- Each channel can be programmed and controlled as high-terminal, low-terminal and OFF
- 20 test procedures can be added at most
- 65k color 7" TFT wide display screen
- Up to 200Msps waveform sampling rate
- Maximum measuring speed: 6meas/sec
- Storage depth of 6k Bytes
- High bandwidth analog acquisition circuit
- High-fidelity corona extraction algorithm (patent technology)
- Four waveform comparison methods
- Automatic storage of instrument parameters
- Measurements on voltage, time and frequency
- Amplification, stretch and movement of the waveform for accurate display
- Multi-sample average, average processing of 32 standard waveforms
- Destructive testing for your correct choose of voltage
- Use demagnetized impulse to ensure the conformity of tested waveforms
- Login of different user right for easy management
- 20 groups of instrument files can be stored and automatically loaded
- Screen information can be stored in USB disk (COPY key)
- System firmware can be automatically upgraded through USB-disk
- Selectable Chinese and English operation interfaces
- Four selectable display interface effects
- Foot control interface for easy measurements
- Handler interface to realize on-line operation
- RS232C, USB Device and LAN interface to realize remote control

### Brief Introduction

■ TH2883 series products are newly developed impulse winding testers by Tonghui. This product line makes Tonghui as the first provider of impulse winding tester from low voltage of 30V to high voltage of 10kV, single channel to multichannel (Max.:8 channels) in this industry. The instrument adopts popular 32 bit CPU and high density SMD technology, 65k color 7-inch TFT wide display screen, bringing ease for your eyes and convenience to your operation. The impulse voltage of 100V~5000V, maximum 8 channel sweep test, maximum 20 test procedures, sampling rate of 200Msps, memory depth of 6k bytes makes your test accurately. The usage of standard sample average, application of demagnetized impulse, high bandwidth analog acquisition circuit, technology of high-fidelity corona extraction as well as the opening of non-destructive test reflect the design philosophy "customer-oriented, share the future technology with you" of Tonghui.

According to the output number of channels, TH2883 series is consist of 2 models: TH2883S8-5 and TH2883S4-5. TH2883S8-5 is the ideal product for measurements of multiphase coils. The 8 channel of TH2883S8-5 can be programmed and configured as voltage high-terminal, voltage low-terminal and OFF. Any combination of the configuration condition of the 8 channels and maximum 20 test procedures can be achieved. Also, it can test the coils successively in 8 channels. TH2883S4-5 is provided with 4 channels. It is especially developed on the basis of the 8 channels of TH2883S8-5 for customers who need less sweep channels. USB Host, RS232C, USB Device and LAN interface are provided in TH2883 series products for your quick save of the waveforms and remote control of the instrument.

### Corona extraction function

With high-fidelity corona extraction algorithm (patent technology) and high bandwidth analog acquisition circuit, TH2883 series products can fully recover the corona waveform of high-frequency and makes you know more about the insulating property of products.



TH2883S8-5 is provided with 8 channels from CH1-CH8, TH2883S4-5 is provided with 4 channels from CH1-CH4. These channels are installed on the rear panel for convenient use, as shown in the figure:



# Safety Tester/Hipot Tester


## IV. TH2883S8-5/TH2883S4-5 Impulse Winding Tester

### Specifications

Model	TH2883S8-5	TH2883S4-5
Impulse voltage	100V-5000V 10V steps	
Voltage accuracy	$\pm(5\% \text{ set value} + 15V)$	
Readback accuracy	$\pm(5\% \text{ actual value} + 15V)$	
Channels	8	4
Inductance test range	$\geq 10\mu\text{H}$	
Impulse energy	Max.: 0.25 Joule	
Test speed	6 times/second (single channel, single step)	
Pulses applied	Max.: 32	
Input Impedance	$5\text{M}\Omega$	
Display	800x480 dots, 65k color TFT; Waveform Display Range: 600x256	
Waveform Acquisition	Sampling rate: Max. 200Msps, 8 levels adjustable Resolution: 8 Bits Memory Depth: 6k Bytes Average: 1 to 32	
Comparison Methods	Comparison with Standard Waveform: <ul style="list-style-type: none"><li>● Area Size Comparison</li><li>● Differential Area Comparison</li><li>● Corona Discharge Comparison</li><li>● Differential Phase Comparison</li></ul>	
Waveform Measurement	Voltage/Frequency/Time	
Trigger Mode	Manual/External/Bus/Internal	
Detection Output	Pass/Fail display/LED/ Alarm	
Measurement Statistics	Statistics for measurement results	
Memory	20 groups of standard waveform data and instrument setup can be stored in internal non-volatile memory. USB flash memory can be used as external memory.	
Interface	Handler, RS232C, USB Device, USB Host, LAN	
Power supply		
Power supply	110V/220V $\pm 10\%$ 50Hz/60Hz $\pm 5\%$	
Power consumption	$\leq 200\text{VA}$	
General conditions		
Working environment	Temperature Humidity	$0^\circ\text{C} - 40^\circ\text{C}$ $\leq 75\% \text{ R.H.}$
Safety and electromagnetic compatibility		IEC61010-1:2001, IEC61326-2-1:2005

# Safety Tester/Hipot Tester

## IV. TH2883 Series Impulse Winding Tester

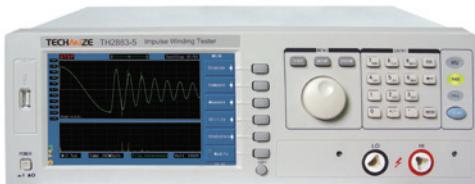

RS232	USB HOST	USB DEVICE	HANDLER	LAN
standard	standard	standard	standard	standard

### TH2883 Series

Dimension(mm):400mm(W)x132mm(H)x420mm(D)  
Weight: 15kg

### Features

- Impulse voltage of 30V~10kV
- Minimum inductance value of winding that can be tested: 1uH
- 65k color 7" TFT wide display screen
- Up to 200Msps waveform sampling rate
- Maximum measuring speed: 6meas/sec
- Storage depth of 6k Bytes
- High bandwidth analog acquisition circuit
- High-fidelity corona extraction algorithm (patent technology)
- Four waveform comparison methods
- Automatic storage of instrument parameters
- Measurements on voltage, time and frequency
- Amplification, stretch and movement of the waveform for accurate display
- Multi-sample average, average processing of 32 standard waveforms
- Destructive testing for your correct choose of voltage
- Use demagnetized impulse to ensure the conformity of tested waveforms
- Login of different user right for easy management
- 20 groups of instrument files can be stored and automatically loaded
- Screen information can be stored in USB disk (COPY key)
- System firmware can be automatically upgraded through USB-disk
- Selectable Chinese and English operation interfaces
- Four selectable display interface effects
- Foot control interface for easy measurements
- Handler interface to realize on-line operation
- RS232C, USB Device and LAN interface to realize remote control

### Brief Introduction

■ TH2883 series products are newly developed impulse winding testers by Tonghui. This product line makes Tonghui as the first provider of impulse winding tester from low voltage of 30V to high voltage of 10kV, single channel to multichannel (Max.:8 channels) in this industry. The instrument adopts popular 32 bit CPU and high density SMD technology, 65k color 7-inch TFT wide display screen, bringing ease for your eyes and convenience to your operation. The minimum impulse voltage of 30V, maximum impulse voltage output of 10kV, winding test of 1uH inductance value, sampling rate of 200Msps, memory depth of 6k bytes makes your test accurately. The usage of standard sample average, application of demagnetized impulse, high bandwidth analog acquisition circuit, technology of high-fidelity corona extraction as well as the opening of non-destructive test reflect the design philosophy "customer-oriented, share the future technology with you" of Tonghui.

According to the output voltage, TH2883 series is consist of 3 models:TH2883-1, TH2883-5 and TH2883-10. With minimum impulse voltage of 30V and maximum impulse voltage of 1200V, TH2883-1 low inductance impulse winding tester can test windings of 1uH low inductance value. The instrument is the ideal test product for inductance coils used by switching power supply. With impulse voltage of 100V~5000V, TH2883-5 is a standard product for testing all kinds of coils. With maximum impulse output voltage of 10kV, TH2883-10 is appropriate for interturn test of higher insulation and voltage resistance.


Standard-equipped USB Host, RS232C, USB Device and LAN interface of TH2883 series product are convenient for your fast storage of graphs and remote control.

### Corona extraction function

With high-fidelity corona extraction algorithm (patent technology) and high bandwidth analog acquisition circuit, TH2883 series products can fully recover the corona waveform of high-frequency and makes you know more about the insulating property of products.



The maximum output test voltage of TH2883-1 is related to the load inductance value, as shown in the follow:

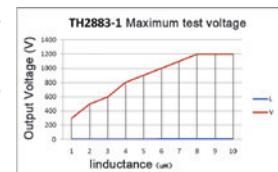

# Safety Tester/Hipot Tester

## IV. TH2883 Series Impulse Winding Tester

### Specifications

Model	TH2883-1	TH2883-5	TH2883-10
Impulse voltage	30V-1200V 5V steps	100V-5000V 10V steps	500V-10kV 20V steps
Voltage accuracy	±(5% set value +5V)	±(5% set value +15V)	±(5% set value +25V)
Readback accuracy	±(5% actual value +5V)	±(5% actual value +15V)	±(5% actual value +25V)
Channels	1		
Inductance test range	≥1uH	≥10uH	≥20uH
Impulse energy	Max.: 0.02 Joule	Max.: 0.25 Joule	Max.: 0.5 Joule
Test speed	6 times/second	6 times/second	3 times/second (when 10kV impulse voltage is output)
Pulses applied	Max.: 32		
Input Impedance	5MΩ		
Display	800x480 dots, 65k color TFT; Waveform Display Range: 600x256		
Waveform Acquisition	Sampling rate: Max. 200Msps, 8 levels adjustable Resolution: 8 Bits Memory Depth: 6k Bytes Average: 1 to 32		
Comparison Methods	Comparison with Standard Waveform: ● Area Size Comparison ● Differential Area Comparison ● Corona Discharge Comparison ● Differential Phase Comparison		
Waveform Measurement	Voltage/Frequency/Time		
Trigger Mode	Manual/External/Bus/Internal		
Detection Output	OK/NG display/LED/ Alarm		
Measurement Statistics	Statistics for measurement results		
Memory	20 groups of standard waveform data and instrument setup can be stored in internal non-volatile memory. USB flash memory can be used as external memory.		
Interface	Handler, RS232C, USB Device, USB Host, LAN		
Power supply			
Power supply	110V/220V ±10% 50Hz/60Hz ±5%		
Power consumption	≤200VA		
General conditions			
Working environment	Temperature	0°C - 40°C	
	Humidity	≤75% R.H.	
Safety and electromagnetic compatibility		IEC61010-1:2001, IEC61326-2-1:2005	

# Safety Tester/Hipot Tester

## IV. TH9410A/TH9411A Ground Bond Tester



### Features

- Test current: 1.00-45.00A
- Grounding resistance range: 0-600mΩ
- Four-terminal test mode to ensure test accuracy
- The internal power amplifier circuit drives the current output, which is not affected by the power supply and load
- The output holes on the front and rear panels are designed to facilitate the integration of standard chassis
- 480×272 dots, TFT-LCD display
- 999.9 seconds test time, which is greater than common 60S test requirements
- Keyboard lock function to prevent misoperation
- Safety lock function to prevent the instrument from accidentally opening the test state
- Store 20 test files, each with 20 test steps



RS232	USB HOST	USB DEVICE	HANDLER
standard	standard	standard	standard

Dimension (mm): 280(W) x 88(H) x 428(D)

Net weight: 14 kg

### Application

Automated test system	Lighting industry
Household appliances	New energy vehicles
Transformer, motor	Electronic components
Electrical equipment	Medical equipment
Electric heating appliances	

### Specifications

Model	TH9410A					TH9411A					
Output	Scop	1A-45A				1A-32A					
	Range	1.00A-5.00A	5.01A-30A	30.01A- 45A	1.00A-5.00A	5.01A-32A					
	Accuracy	±(2% Reading + 3 Digit)									
	Setting Resolution	0.01A									
	Readback Resolution	0.01A									
	Output Voltage	8Vmax	6Vmax	8Vmax							
Resistance	Frequency	50 / 60Hz: ± 0.1%SET									
	Test Range	0-600mΩ (Rmax <=6 / Iset (Iset: Setting Current)), The max Resistance could be 600mΩ when the current is less than 10A.									
	Accuracy	± (2% Reading + 2 Digit)									
	Resolution	1 mΩ	0.1 mΩ	0.1 mΩ	1 mΩ	0.1 mΩ					
	Setting	Upper Limit	0-600mΩ								
		Lower Limit	0-600mΩ (Less than Upper Limit)								
		Resolution	1mΩ								
Test Time	Bias	Range	0 - 100 mΩ								
		Resolution	0.1mΩ								
		Accuracy	± (2% Setting + 2 Digit)								
Input Power	Range	0, 0.5 - 999.9s (0 = Continuous)									
	Resolution	0.1s									
	Accuracy	± (0.1% + 0.05s)									
	Voltage	110V, 220V									
	Frequency	47.5-63Hz									
	Power Consumption	<=900VA	<= 800VA								


# Cable/Harness Tester

## IV. TH600 Series Modular Wire Harness and Cable Integrated Test System

NEW

### Features

- 7-inch TFT LCD true color display, 800X480 resolution, 16-bit color
- Chinese and English operation interface
- Support 2-wire/4-wire test conversion, the test channel up to 10240 channels
- Conduction, short-circuit, instantaneous short-circuit, instantaneous disconnection, instantaneous conduction
- Soldering resistance test (Stable to 1 $\mu\Omega$ )
- Single-side test, double-side test
- Break, short-circuit end edge judgment
- Point test, automatic point search function
- Withstand voltage test with arc detection function
- Sequential test function
- Test line contact check
- Support thermistor (NTC) measurement
- Separation of high and low voltage technology, its own insulation impedance up to > 100G $\Omega$
- A variety of high-voltage test methods to choose from
- Test resistors, capacitors, diodes and other components, the use of voltage and current parallel sampling technology, sampling data faster
- Instrument self-test function, online troubleshooting instruments

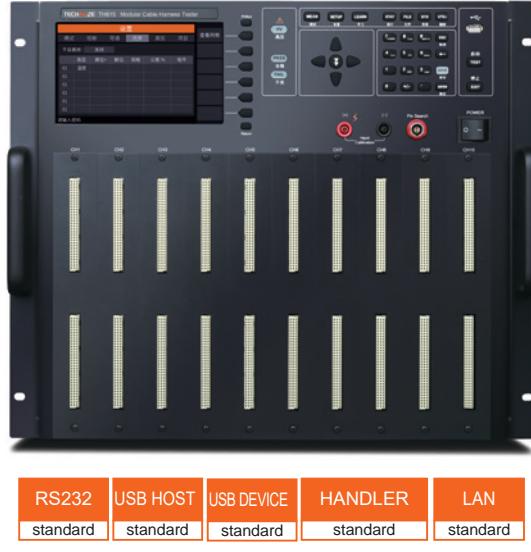

### TH6XX Series

Dimension(mm):483mm(W)x396mm(H)x535mm(D)  
Weight: Approx.35kg

Dimension(mm):483mm(W)x660mm(H)x535mm(D)  
Weight: Approx.60kg

### Application

#### ■ Automotive Electronics:

Automotive Battery FPC, Integrated Female Welding Resistor CSS, Automotive PDU, ECU Connecting Wire, Automotive Wiring Harness, Navigation Connecting Wire, Navigation Screen Wire, In-vehicle Electronics Connecting Wire, Audio/Video Connecting Wire

#### ■ Communication and IT:

Telephone cables, network connecting cables, multi-strand connecting cables, cell phone screen cables, TYPEC data cables, USB data cables, laptop screen cables, HDMI connecting cables, VGA connecting cables, IDE hard disk connecting cables, SATA hard disk connecting cables, etc.

#### ■ Electronic industry:

Array cable, flat cable, connectors, power cords, multi-switches, RS232 cables, GPIB cables, USB extension cables, multi-core socket

#### ■ Components:

Passive components: capacitors, inductors, resistors, diodes, capacitance polarity

#### ■ Safety Test:

AC withstand voltage, DC withstand voltage, insulation resistance

# Cable/Harness Tester

## IV. TH600 Series Modular Wire Harness and Cable Integrated Test System

### Specifications

Model	TH615-1280-2W TH615-2560-2W	TH615-640 TH615-1280	TH630-160 TH630-320 TH630-640	TH640-160 TH640-320 TH640-640			
Two-wire/Four-wire	Two-wire Four-wire	Four-wire	Four-wire	Four-wire			
Maximum number of test points	2560	1280	640	640			
Maximum number of available modules	20	20	20	20			
Display	7-inch TFT LCD true-color display with a resolution of 800×480 and 16-bit color depth.						
Test signal source	AC signal source	Frequency	50Hz - 100kHz				
		Accuracy	0.02%				
	Programmable DC power supply	Amplitude	1Vrms				
		Accuracy	10%				
	Programmable high-voltage power supply	Voltage source	Range	0.1V - 5V			
		Accuracy	±(2% of the set value + 0.1% of the full scale)				
	Programmable high-voltage power supply	Current source	Range	1-20mA, 100mA, 1A			
		Accuracy	±(2% of the set value + 0.1% of the full scale)				
	AC	DC	Range	50V - 1500V	50V - 1500V	50V - 3000V	50V - 4000V
		Accuracy	±(1% of the set value + 0.5% of the full scale)				
Testing speed	It is related to the testing channel. For specific details, please refer to the instruction manual.						
Capacitance measurement	Accuracy	Range	10pF-1000μF				
		100pF - 220pF	±(10% of the reading + 0.5% of the full scale)				
		220pF - 6.8nF	±(5% of the reading + 0.3% of the full scale)				
		6.8nF - 330nF	±(5% of the reading + 0.3% of the full scale)				
		330nF - 1.5uF	±(5% of the reading + 1% of the full scale)				
		1.5uF - 33uF	±(5% of the reading + 0.5% of the full scale)				
Resistance testing	Accuracy	Range	33uF - 1000uF				
		Welding	10 μΩ - 10 mΩ, Range: 10 mΩ, ±(1% of the reading + 0.05% of the range)				
		Continuity	10 mΩ - 1 kΩ, Ranges: 1 Ω, 10 Ω, 100 Ω, 1 kΩ, ±(1% of the reading + 0.05% of the range)				
		DC	1 kΩ - 10 MΩ, Ranges: 10 kΩ, 100 kΩ, 1 MΩ, 10 MΩ, ±(1% of the reading + 0.05% of the range)				
Open-circuit and short-circuit testing	Accuracy	Range	1kΩ-50kΩ				
		Accuracy	10%				
		Speed	640 points/40s	640 points/0.1s	640 points/0.1s	640 points/0.1s	
Diode testing	Accuracy	Voltage	0-10V				
		Accuracy	±(5% of the reading + 1% of the full scale)				
Insulation resistance	Accuracy	Range	1MΩ-10GΩ				
		1MΩ-100MΩ	±(3% of the reading + 0.1% of the full scale)				
		100MΩ-10GΩ	±(7% of the reading + 2% of the full scale)				
DC leakage current	Accuracy	Range	1μA-5mA				
		Accuracy	Ranges: 5.5 μA, 55 μA, 0.55 mA, 1.1 mA, 5 mA, ±(5% of the reading + 0.04% of the full scale)				
AC leakage current	Accuracy	Range	10UA-5mA				
		Accuracy	Ranges: 55 μA, 0.55 mA, 5 mA, ±(10% of the reading + 0.1% of the full scale)				
Contact inspection	It is only applicable in the four-wire mode.						
HANDLER interface	8-channel output, providing dozens of signal customization options.						
	8-channel input, providing signals for start, stop, gear adjustment (up to 30 profiles), etc.						
Dimensions (mm) (W×H×D)	483x396x535		483x311x535	483x311x535			
	483x660x535		483x396x535	483x396x535			
weight	appr. 35kg		appr. 28kg	appr. 28kg			
	appr. 60kg		appr. 35kg	appr. 35kg			
	appr. 60kg		appr. 60kg	appr. 60kg			

# Cable/Harness Tester

## IV. TH600Series Modular Wire Harness and Cable Integrated Test System

### Order Information

Model	Configuration	Parameters	Full Configuration Quantity
TH615-2560-2W			
TH615-1280-2W	TH615-2560M-2W	Main unit 1.5kV two wires 15U	1
	TH615-01-2W	Scanning card 1kV two wires 128 channels	20
	TH615-02-2W	Test cable kit (two wires 128 Pin, Cable length: 2 meters.)	20
TH615-640	TH615-1280M-2W	Main unit 1.5kV two wires 9U	1
	TH615-01-2W	Scanning card 1kV two wires 128 channels	10
	TH615-02-2W	Test cable kit (two wires 128 Pin, Cable length: 2 meters.)	10
TH615-1280	TH615-640M	Main unit 1.5kV four wires 9U	1
	TH615-01	Scanning card 1.5kV four wires 64 channels	10
	TH615-02	Test cable kit (four wires 64 Pin, Cable length: 2 meters.)	10
TH630-160	TH615-1280M	Main unit 1.5kV four wires 15U	1
	TH615-01	Scanning card 1.5kV four wires 64 channels	20
	TH615-02	Test cable kit (four wires 64 Pin, Cable length: 2 meters.)	20
TH630-320	TH630-160M	Main unit 3kV four wires 7U	1
	TH630-03	Scanning card 3kV four wires 16 channels	10
	TH630-04	Test cable kit (four wires 16 Pin, Cable length: 2 meters.)	10
TH630-640	TH630-320M	Main unit 3kV four wires 9U	1
	TH630-01	Scanning card 3kV four wires 32 channels	10
	TH630-02	Test cable kit (four wires 32 Pin, Cable length: 2 meters.)	10
TH640-160	TH630-640M	Main unit 3kV four wires 15U	1
	TH630-01	Scanning card 3kV four wires 32 channels	20
	TH630-02	Test cable kit (four wires 32 Pin, Cable length: 2 meters.)	20
TH640-320	TH640-160M	Main unit 4kV four wires 7U	1
	TH640-03	Scanning card 4kV four wires 16 channels	10
	TH640-04	Test cable kit (four wires 16 Pin, Cable length: 2 meters.)	10
TH640-640	TH640-320M	Main unit 4kV four wires 9U	1
	TH640-01	Scanning card 4kV four wires 32 channels	10
	TH640-02	Test cable kit (four wires 32 Pin, Cable length: 2 meters.)	10
	TH640-640M	Main unit 4kV four wires 15U	1
	TH640-01	Scanning card 4kV four wires 32 channels	20
	TH640-02	Test cable kit (four wires 32 Pin, Cable length: 2 meters.)	20

Note: Place an order=Main unit + Quantity of scanning cards + Quantity of test cables

# Cable/Harness Tester

## IV. TH8601/A Cable/Harness Tester

### Features

- 7" TFT LCD truecolor display screen, 16-bit, 800X480 resolution
- Cortex\_M3 processor core
- Selectable Chinese and English operation interface
- AC: test frequency of 50Hz-300kHz, accuracy of 0.02%
- DC: test range of 0V-5V and accuracy of 10%
- Maximum 128 pin for sweeping and testing
- Insulation resistance of more than 10G
- Selectable RS232, RS485, GPIB, USB, LAN and Handler interfaces
- USB interface can be used for storage of setup files and test data as well as upgrade of the program



RS232	USB HOST	USB DEVICE	HANDLER	LAN	GPIB	RS485
standard	standard	standard	standard	standard	option	option

### TH8601/A

Dimension(mm): 425mm(W)x177mm(H)x355mm(D)

Weight: 7.5kg

#### ■ Electronic Industry

Flat wire, flat wire, connector, power cord, multiplexer, RS232 connection line, GPIB cable, USB extension cable, multi-core socket

#### ■ Components

Passive components: capacitors, inductors, resistors, diodes, capacitor polarity, voltage drop

#### ■ Safety test

AC withstand voltage, DC withstand voltage, insulation insulation

### Application

- Communication and IT  
telephone lines, network cables, multi-strand cables, mobile phone screen cables, TYPE-C data cables, USB data cables, laptop screen cables, HDMI cables, VGA cables, IDE hard disk cables, SATA hard disks Connection line etc.
- Automotive Electronics  
ECU cable, automotive wiring harness, navigation cable, navigation screen cable, car electronic product cable, audio and video cable

### Specifications

Parameters	Range	Specific Index
Test Pin	TH8601	128 Pin
	TH8601A	64 Pin
Test signal source	Sine signal source: 50Hz-300kHz, Programmable capacitance component test 1Vrms	frequency: 0.02%, 1Vrms, Voltage 10%
	Programmable DC signal source:5Vdc MAX	10%
	Programmable DC current source:1-20mA	10%
	Programmable DC high voltage source:1mA Max	5V-100V 100Vdc-1000Vdc 10%±1 digit 5%±1 digit
	Programmable AC high voltage source:10mA Max	50V-100Vac 100Vac-750Vac 10%±1 digit 5%±1 digit
	Channel plate on-off scanning signal source:5Vdc	
	Transient open and short circuit (128 points) sample standard:10ms	Indicates the time of sweeping 64 NET O/S at a time
Test speed	Basic value of testspeed:100ms	Indicates the measurement time of single passive component or the total measurement time of one cable
Capacitance measurement	Range: 0.1pF-300pF (sample 10pFmin)	10%±3 digit
	Range: 300pF-1000μF	5%±3 digit
Resistance measurement	10mohm-1Mohm	2%±1 digit
Cond. /Interval cond.	10mohm-50ohm	2%±1 digit
Open and short circuit	1kohm-50kohm	10%±1 digit
Diode Testing	0-10V	10%±1 digit
Insulation resistance	1Mohm-100Mohm	5%±5 digit
	100Mohm-1000Mohm	10%±5 digit
DC leakage current	1μA-1000μA	5%±2 digit
AC leakage current	0.01mA-5mA	10%±5 digit

# Cable/Harness Tester

## IV. TH8602 Series Cable/Harness Tester

### Features

- Test Pin: 64-256 pin, four-terminal test
- Conductance, Transient open and short circuit, Hipot, IR, Component test.
- (Patent) High and low voltage separation technology, insulation impedance > 100GΩ
- Built-in 10A independent DC current source for pressure dropping test
- 7" TFT LCD TrueColor display screen, 16-bit, 800X480 resolution
- Firmware update through U disk
- Selectable Chinese and English operation interface
- (Patent) 4 high-pressure test modes: a pair of other, dichotomy, automatic test, grounding test.
- Excellent and reliable ARC detection function
- Testing resistance, capacitance, diode and other components using four-terminal testing technology
- The module equipped with independent read-write chip detects whether the chip in the wire is working normally
- Support for connector testing
- Support multi-file testing, providing flexible solutions for complex wires
- Handler supports up to 40 outputs
- Communication command provides two instruction systems: SCPI
- Provide instrument self-inspection function, check instrument fault on line



CE

RS232	USB HOST	USB DEVICE	HANDLER	LAN	GPIB	RS485
standard	standard	standard	standard	standard	option	option

Dimension(mm): 425mm(W)x177mm(H)x355mm(D)

Weight: 7.5kg

### Application

- Communication and IT
  - telephone lines, network cables, multi-strand cables, mobile phone screen cables, TYPE-C data cables, USB data cables, laptop screen cables, HDMI cables, VGA cables, IDE hard disk cables, SATA hard disks Connection line etc.
- Automotive Electronics
  - ECU cable, automotive wiring harness, navigation cable, navigation screen cable, car electronic product cable, audio and video cable
- Electronic Industry
  - Flat wire, flat wire, connector, power cord, multiplexer, RS232 connection line, GPIB cable, USB extension cable, multi-core socket
- Components
  - Passive components: capacitors, inductors, resistors, diodes, capacitor polarity, voltage drop
- Safety test
  - AC withstand voltage, DC withstand voltage, insulation insulation

### Specifications

Specification			TH8602-1	TH8602B	TH8602C	TH8602-2	TH8602-3	TH8602-4
Test Pin			64		128	192	256	
Test Signal Source	AC	Frequency Range	50Hz-100kHz, Accuracy 0.02%					
	DC	Voltage	0-1Vrms, Accuracy 10%					
		Current	0-5V, Accuracy 10%±1 Digit					
		Channel board open-off scan signal source	1-20mA, Accuracy 10%±1 Digit					
Capacitance Measurement			5Vdc					
DCR			1uF-1000μF, Accuracy: 10%±1 Digit					
Cond./Interval cond.			10mΩ-1MΩ, Accuracy: 2%±1 Digit					
Open and Short Circuit			10mΩ-50Ω					
Diode Testing			1kΩ-50kΩ, Accuracy: 10%±1 Digit					
DC withstand voltage	Voltage		0-10V, Accuracy: 10%±1 Digit			5V-1500V, Accuracy: 10%±1 Digit	5V-1000V, Accuracy: 10%±1Digit	
	Current		1uA-5mA, Accuracy: 10%±5 Digit			1uA-5mA, Accuracy: 10%±5 Digit	1uA-5mA, Accuracy: 10%±5 Digit	
AC withstand voltage	Voltage		5V-1000V, Accuracy: 10%±1 Digit			50V-750V, Accuracy: 10%±1 Digit	50V-750V, Accuracy: 10%±1 Digit	
	Current		0.01mA-5mA, Accuracy: 10%±5 Digit			0.01mA-5mA, Accuracy: 10%±5 Digit	0.01mA-5mA, Accuracy: 10%±5 Digit	
Insulation Resistance	Voltage		5V-1500V, Accuracy: 10%±1 Digit			5V-1000V, Accuracy: 10%±1 Digit	5V-1000V, Accuracy: 10%±1 Digit	
	Resistance		1MΩ-1GΩ, Accuracy: 10%±5 Digit			1MΩ-1GΩ, Accuracy: 10%±5 Digit	1MΩ-1GΩ, Accuracy: 10%±5 Digit	
TYPE-C Cable Test	EMARK chip content read and write check		-----	√	√	-----	-----	-----
	5A independent constant source		-----	-----	√	-----	-----	-----
	5A20V pressure drop test		-----	-----	√	-----	-----	-----
Test Speed			Instant breakpoint: 4ms Instantaneous circuit: 5μs-2ms					

# Cable/Harness Tester

## IV. TH8603-4 Cable/Harness Tester

### Features

- 7-inch TFTLCD true color display, 800X480 resolution, 16-bit color.
- Internal storage space 3M
- Support U disk to store test files
- One-click screen capture function, pictures are automatically stored to U disk
- The program can be upgraded online via U disk
- Chinese and English optional operation interface
- Maximum provides 512 (two-wire)/256 (four-wire) channels, divided into 8 slots A, B, C, D, E, F, G, H
- (Patent) Provides 750VAC and 1000VDC high voltage test functions, adopts high and low voltage separation technology, makes its own insulation resistance up to 100G or more, and has a wider test range
- (Patent) Provide 4 kinds of high voltage test methods: one pair of other, dichotomy, automatic test, ground test 4 methods
- Provide excellent and reliable arc detection function
- Testing resistance, capacitance, diode and other components, using four-terminal test technology, higher test accuracy; using voltage and current separation parallel sampling technology, sampling data faster
- Support Typec related wire test, provide a complete test plan, and add the function of one-key setting of components.
- An independent DC constant current source is set inside, which can provide a maximum of 10A constant current source for measuring the voltage drop of the line
- An independent read-write chip module is built in to check whether the chip in the wire is normal
- Support connector test, provide multi-product test function, and signal output of each product.
- Support multi-file testing, providing more and more flexible testing solutions for complex wires.
- HANDLER interface, supports 16 outputs, all options are relay driven, and the user can freely define the signal and level of each channel
- Communication command provides SCPI command system
- Provide instrument self-check function and maintenance function, and can perform online troubleshooting of instrument faults

### Application

- Communication and IT telephone lines, network cables, multi-strand cables, mobile phone screen cables, TYPE-C data cables, USB data cables, laptop screen cables, HDMI cables, VGA cables, IDE hard disk cables, SATA hard disks Connection line etc.
- Automotive Electronics ECU cable, automotive wiring harness, navigation cable, navigation screen cable, car electronic product cable, audio and video cable
- Electronic Industry Flat wire, flat wire, connector, power cord, multiplexer, RS232 connection line, GPIB cable, USB extension cable, multi-core socket
- Components Passive components: capacitors, inductors, resistors, diodes, capacitor polarity, voltage drop
- Safety test AC withstand voltage, DC withstand voltage, insulation insulation



Dimension(mm): 425mm(W)x177mm(H)x355mm(D)

Weight: 7.5kg

### Specifications

Specification	TH8603-4	
Test Pin	512	
Test Signal Source	AC	Frequency 50Hz-100kHz, Accuracy 0.02% Range 0-1Vrms, Accuracy 10%
	DC	Voltage 0-5V, Accuracy 10%± 1 Digit Current 1-15mA, Accuracy 10%± 1 Digit
		Channel board open-off scan signal source 5Vdc
		Capacitance Measurement 1nF-1000μF, Accuracy: 10%±1 Digit
		DCR 10mΩ-1MΩ, Accuracy: 2%±1 Digit
Cond./Interval cond.		0.1Ω-950Ω
Open and Short Circuit		1kΩ-50kΩ, Accuracy: 10%±1 Digit
Diode Testing		0-10V, Accuracy: 10%±1 Digit
DC withstand voltage	Voltage	5V-1000V, Accuracy 5V-100V, 10%±1 Digit, 100V-1000V, 5%±1 Digit
	Current	1uA-1000uA, Accuracy: 10%±5 Digit
AC withstand voltage	Voltage	50V-750V, Accuracy 50V-100V, 10%±1 Digit, 100V-750V, 5%±1 Digit
	Current	0.01mA-5mA, Accuracy: 10%±5 Digit
Insulation Resistance	Voltage	5V-1000V, Accuracy: 10%±1 Digit
	Resistance	1MΩ-1GΩ, Accuracy: 10%±5 Digit
Test Speed Basic Test Speed: 100ms		Momentary Short Circuit: 20ms(512 Dots) Basic Test Speed: 100ms

# Cable/Harness Tester

## IV. TH8610 Series Cable/Harness Tester



### Features

- 7-inch TFT LCD true color display, 800X480 resolution, 16-bit color
- Chinese and English operation interface
- Support internal four-wire and external four-wire measurement
- Conduction, short circuit, instant short circuit, instant disconnection, instant conduction
- Single-side test, double-side test
- Judgement of broken and short circuit end edge
- Automatic point search function for point measurement
- Withstand voltage test with arc detection function
- NTC one-key setting function
- Sequential test function
- (Patent) High and low voltage separation technology, its own insulation impedance up to  $> 100\text{G}\Omega$
- (Patent) 4 kinds of high-voltage test mode: a pair of other, dichotomy, automatic test, grounding test
- Test resistors, capacitors, diodes and other components, using voltage and current parallel sampling technology, faster sampling data
- Support Type C related wire testing, provides a complete set of test programs, adding the instrument self-test function, online troubleshooting instrument



RS232	USB HOST	USB DEVICE	HANDLER	GPIB	RS485
standard	standard	standard	standard	option	option

Dimension(mm): 425mm(W)x177mm(H)x355mm(D)

Weight: 7.5kg

### Application

- Automotive Electronics  
Battery connector solder joint impedance  
ECU connecting cable, automotive wiring harness, navigation connecting cable, navigation screen cable, car electronics connecting cable, audio and video connecting cable
- Electronic Industry  
Cable, flat cable, connector, power cord, multi-switch, RS232 cable, GPIB cable, USB extension cable, multi-core socket
- Communication and IT  
Telephone cables, network connection cables, multi-strand connection cables, cell phone screen cables, TYPEC data cables, USB data cables, laptop screen cables, HDMI connection cables, VGA connection cables, IDE hard disk connection cables, SATA hard disk connection cables, etc.
- Components  
Passive components: capacitors, inductors, resistors, diodes, capacitor polarity, voltage drop



### Specifications

Model	TH8610	TH8610A
Test pin position	128Pin	64Pin
Test Signal Source		
AC Signal Source	Frequency Range Accuracy	50Hz - 300kHz 0.02%
	Range Accuracy	1Vrms 10%
Programmable DC Source	Voltage Range Accuracy	5V MAX 10%±1 word
	Current Range Accuracy	1-20mA, 100mA, 1A 5% ±1 word
Programmable High Voltage Source	DC Range Accuracy	50V - 1500V 5%±1 word
	AC Range Accuracy	50V-1000V 5%±1 word
Testing Speed	Short circuit break(128 points)	10ms
Capacitance Measurement	Range Accuracy	10pF-1000μF 10%±1 word
DC Resistance	Range Accuracy	1kΩ-1MΩ 2%±1 word
Conduction Resistance	Range Accuracy	1μΩ-1kΩ 2%±1 word
Short-circuit Test	Range Accuracy	1kΩ-50kΩ 10%±1 word
Short-circuit Test	电压 Accuracy	0-10V 10%±1 word
Insulation Resistance	Range Accuracy	1MΩ-100MΩ 5%±5 word
	Range Accuracy	100MΩ-5GΩ 10%±5 word
DC Leakage Current	Range Accuracy	1μA-5mA 5%±2 word
AC Leakage Current	Range Accuracy	10μA-5mA 10%±5 word
Volume (mm)	425(W)x177(H)x355(D)	
Weight	7.5kg	


## V. Instrument Accessories & Options

				
TH26001A	TH26004S-1	TH26004A	TH26004B	TH26004D
				
TH26004E-1	TH26005C	TH26006	TH26007A	TH26008A
				
TH26008B	TH26009B	TH26009C	TH26010	TH26011AS
				
TH26011BS	TH26011CS	TH26011D	TH26023	TH26027AS
				
TH26029B	TH26029C	TH26034	TH26035B	TH26036
				
TH26038	TH26039	TH26047	TH26047A	TH26048A
				
TH26048B	TH26050S	TH26060H	TH26061D	TH26065

## V. Instrument Accessories & Options

## V. Instrument Accessories & Options

				
TH10202	TH90003	TH90004	TH1778-01	TH1778-02
				
TH1778-03	TH1779-01	TH1779-02	YT3007	YT3008

## CHANGZHOU TONGHUI ELECTRONIC CO.,LTD.

Addr: No.1, Xinzhu Road, New District, ChangZhou, JiangSu, 213034 China.

Tel: +86 519 85195566

Fax: +86 519 85109972

Email: lq@tonghui.com.cn

dx.han@tonghui.com.cn

Website: en.tonghui.com.cn

