

UPH series

High Voltage DC Power Supply



The UPH series are high power output Switching DC power supply with rated power of 500W to 8KW. The UPH series adopts ZVZCS PWM technology, which greatly reduces switching consumption and therefore facilitates switching function with high efficiency and high stability.


The UPH series are built into a 2U 19-inch standard chassis. The maximum rated voltage is from +1000V to +30KV. There is option for negative output from 1000V to -30KV. RS232 and RS485 communication interfaces are made as standard part for UPH series, providing multiple communication choices for digital control.

Features


- Adopting ZVZCS PWM technology, high efficiency and high stability
- Max. rated output 500W to 8KW
- Max. rated voltage from +1000V to +30KV
- Option for negative output from -1000V to -30KV
- Constant voltage and constant current operations, auto CV/CC switch
- Built into 2U 19-inch standard chassis
- Thermostatic control fan, low noise
- Low ripple, high stability
- No overshoot during startup
- List mode function, Auto Run function
- Preset function, setting of voltage and current with output open circuit
- Front panel operation: preset voltage and current, output ON/OFF
- Multiple protections: OVP, OTP, UVP and current limit protections
- Multiple programming interfaces: RS232, RS485
- Support ModBus-RTU commands

Free PC Software


Multiple remote control and sampling functions. Such as: voltage & current setup, voltage & current feedback, data recording, export data to EXCEL, List mode function, auto run function. Adjustable voltage rise time.

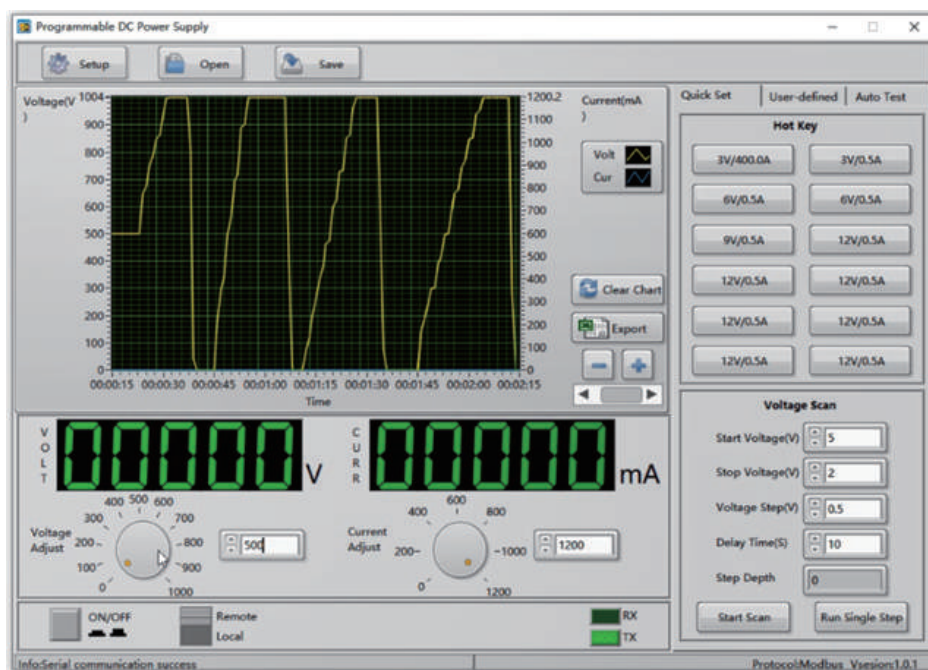

No Overshoot

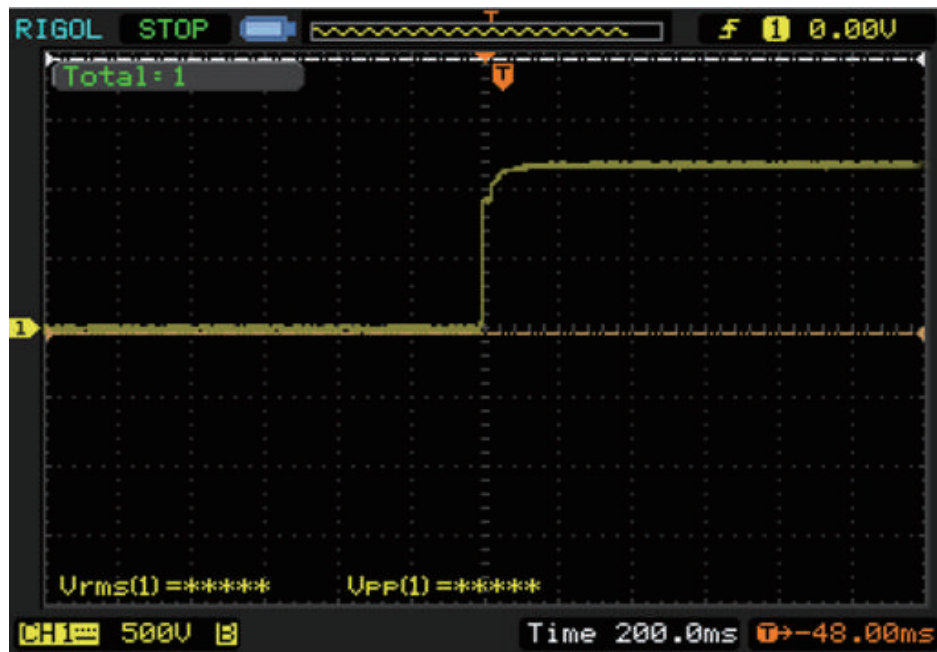

Panel Descriptions (2U frame)

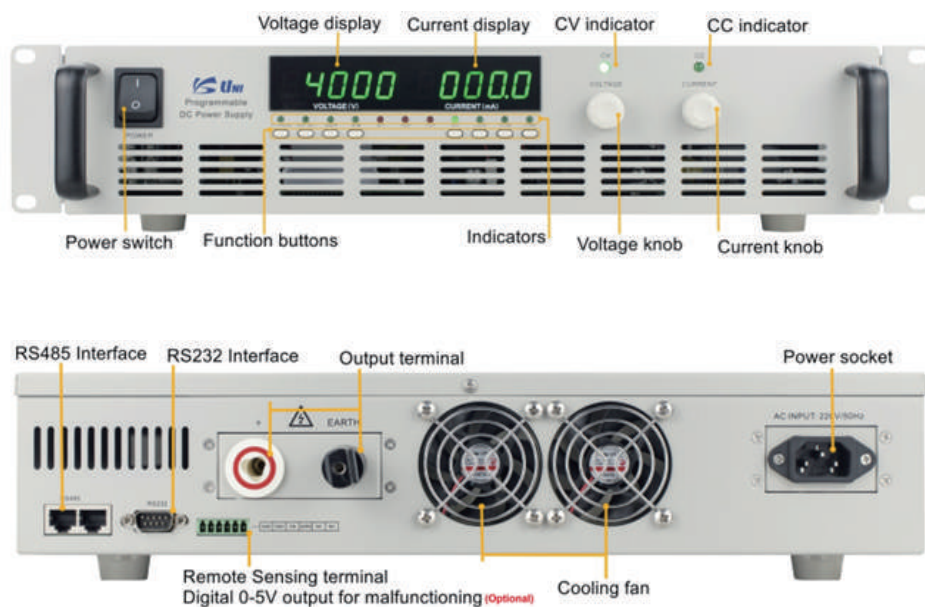

Product Photos (1/2 2U frame for 600W, Max 3kV)



Product Photos (2U frame for 600W~5kW)



(1P 220Vac input for 600W ~ 2.4kW)



(3P 380Vac input for 2.kW ~ 5kW)

Product Photos (3U frame for 6kW~8kW)



Specifications

Output		
Rated Voltage		Full range adjustable
Rated Current		Full range adjustable
OVP Range		Up to 105% of rated voltage adjustable
Line Regulation		CV≤0.5%+2LSB, CC≤0.5%+2LSB
Load Regulation		CV≤0.1%+2LSB, CC≤0.1%+2LSB
Ripple & Noise		≤0.05% FS, ≤0.1% FS
Programming		
Programming Resolution	Voltage	1V
	Current	0.01mA / 0.1mA / 1mA
	OVP	1V
Interface		RS232, RS485
Commands		ModBus-RTU
Display		
Meter	Voltage	4 digits LED display for 1000V to 8000V, 5 digits LED display for 10000V to 30000V
	Current	4 digits LED display
Display	Voltage	1V
Resolution	Current	0.01mA / 0.1mA / 1mA
Display	Voltage	≤0.2%FS+2LSB
Accuracy	Current	≤0.5%FS+2LSB
Protection		
Over Voltage Protection (O.V.P.)		Built-in OVP protection with limit of 105% rated output voltage. The output will be shut down when OVP is activated.
Over Temperature Protection (O.T.P.)		Built-in OTP protection with heat sink temperature limit of 50℃±5%. The output will be shut down when OTP is activated.
Under Voltage Protection (U.V.P.)		Built-in UVP protection with limit of 165Vac. The output will be shut down when UVP is activated.
General		
Cooling method		Cooling fan
Operating environment		0℃~40℃, 10%~80%RH
Storage environment		-20℃~70℃, 10%~90%RH

Specifications

Model (500W)	Rated Output			Voltage Ripple	Programming Resolution			Display Resolution	
	V	A	OVP		V	A	OVP	V	A
UPH500-10K	300V~10kV	0~50mA	0~10500V	≤0.1% FS	1V	0.10mA	1V	1V	0.01mA
UPH500-10KN	-300V~-10kV	0~50mA	0~-10500V	≤0.1% FS	1V	0.10mA	1V	1V	0.01mA
UPH500-12K	360V~12kV	0~42mA	0~12600V	≤0.1% FS	1V	0.10mA	1V	1V	0.01mA
UPH500-12KN	-360V~-12kV	0~42mA	0~-12600V	≤0.1% FS	1V	0.10mA	1V	1V	0.01mA
UPH500-15K	450V~15kV	0~34mA	0~15750V	≤0.1% FS	1V	0.10mA	1V	1V	0.01mA
UPH500-15KN	-450V~-15kV	0~34mA	0~-15750V	≤0.1% FS	1V	0.10mA	1V	1V	0.01mA
UPH500-20K	1000V~20kV	0~25mA	0~21000V	≤0.1% FS	1V	0.10mA	1V	1V	0.01mA
UPH500-20KN	-1000V~-20kV	0~25mA	0~-21000V	≤0.1% FS	1V	0.10mA	1V	1V	0.01mA
UPH500-25K	1250V~25kV	0~20mA	0~26250V	≤0.1% FS	1V	0.10mA	1V	1V	0.01mA
UPH500-25KN	-1250V~-25kV	0~20mA	0~-26250V	≤0.1% FS	1V	0.10mA	1V	1V	0.01mA
UPH500-30K	1500V~30kV	0~17mA	0~31500V	≤0.1% FS	1V	0.10mA	1V	1V	0.01mA
UPH500-30KN	-1500V~-30kV	0~17mA	0~-31500V	≤0.1% FS	1V	0.10mA	1V	1V	0.01mA
Dimensions	482.6Wx88Hx506D mm (2U)								
Weight	Approx 11kg								
AC Input	1φ3W, 220V±10% 47~63Hz								

Model (600W)	Rated Output			Voltage Ripple	Programming Resolution			Display Resolution	
	V	A	OVP		V	A	OVP	V	A
UPH600-10HS	0~1000V	0~600mA	0~1050V	≤0.05% FS	1V	0.1mA	1V	1V	0.1mA
UPH600-10HSN	-200~-1000V	0~600mA	-200~-1050V	≤0.05% FS	1V	0.1mA	1V	1V	0.1mA
UPH600-12HS	0~1200V	0~500mA	0~1260V	≤0.05% FS	1V	0.1mA	1V	1V	0.1mA
UPH600-12HSN	-240~-1200V	0~500mA	-240~-1260V	≤0.05% FS	1V	0.1mA	1V	1V	0.1mA
UPH600-15HS	0~1500V	0~400mA	0~1575V	≤0.05% FS	1V	0.1mA	1V	1V	0.1mA
UPH600-15HSN	-300~-1500V	0~400mA	-300~-1575V	≤0.05% FS	1V	0.1mA	1V	1V	0.1mA
UPH600-20HS	0~2000V	0~300mA	0~2100V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH600-20HSN	-400~-2000V	0~300mA	-400~-2100V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH600-30HS	200~3000V	0~200mA	200~3150V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH600-30HSN	-600~-3000V	0~200mA	-600~-3150V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
Dimensions	212.5Wx88Hx340D mm (1/2 2U)								
Weight	Approx 5kg								
AC Input	1φ3W, 220V±10% 47~63Hz								

Specifications

Model (600W)	Rated Output			Voltage Ripple	Programming Resolution			Display Resolution	
	V	A	OVP		V	A	OVP	V	A
UPH600-10H	0~1000V	0~600mA	0~1050V	≤0.05% FS	1V	0.1mA	1V	1V	0.1mA
UPH600-10HN	-200~-1000V	0~600mA	-200~-1050V	≤0.05% FS	1V	0.1mA	1V	1V	0.1mA
UPH600-12H	0~1200V	0~500mA	0~1260V	≤0.05% FS	1V	0.1mA	1V	1V	0.1mA
UPH600-12HN	-240~-1200V	0~500mA	-240~ -1260V	≤0.05% FS	1V	0.1mA	1V	1V	0.1mA
UPH600-15H	0~1500V	0~400mA	0~1575V	≤0.05% FS	1V	0.1mA	1V	1V	0.1mA
UPH600-15HN	-300~-1500V	0~400mA	-300~ -1575V	≤0.05% FS	1V	0.1mA	1V	1V	0.1mA
UPH600-20H	0~2000V	0~300mA	0~2100V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH600-20HN	-400~-2000V	0~300mA	-400~ -2100V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH600-30H	200~3000V	0~200mA	200~3150V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH600-30HN	-600~-3000V	0~200mA	-600~ -3150V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH600-40H	200~4000V	0~150mA	200~4200V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH600-40HN	-800~ -4000V	0~150mA	-800~ -4200V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH600-50H	300~5000V	0~120mA	300~5250V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH600-50HN	-1000~ -5000V	0~120mA	-1000~ -5250V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH600-60H	400~6000V	0~100mA	400~6120V	≤0.1% FS	1V	0.01mA	1V	1V	0.01mA
UPH600-60HN	-1200~ -6000V	0~100mA	-1200~ -6120V	≤0.1% FS	1V	0.01mA	1V	1V	0.01mA
UPH600-80H	500~8000V	0~75mA	500~8400V	≤0.1% FS	1V	0.01mA	1V	1V	0.01mA
UPH600-80HN	-1600~ -8000V	0~75mA	-1600~ -8400V	≤0.1% FS	1V	0.01mA	1V	1V	0.01mA
UPH600-100H	800~10000V	0~60mA	800~10500V	≤0.1% FS	1V	0.01mA	1V	1V	0.01mA
UPH600-100HN	-2000~ -10000V	0~60mA	-2000~ -10500V	≤0.1% FS	1V	0.01mA	1V	1V	0.01mA
UPH600-120H	1000~12000V	0~50mA	1000~12600V	≤0.1% FS	1V	0.01mA	1V	1V	0.01mA
UPH600-120HN	-2400~ -12000V	0~50mA	-2400~ -12600V	≤0.1% FS	1V	0.01mA	1V	1V	0.01mA
Dimensions	425W×88H×463D mm (2U)								
Weight	Approx 12kg								
AC Input	1φ3W, 220V±10% 47~63Hz								

Specifications

Model (1200W)	Rated Output			Voltage Ripple	Programming Resolution			Display Resolution	
	V	A	OVP		V	A	OVP	V	A
UPH1200-10H	0~1000V	0~1200mA	0~1050V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH1200-10HN	-200~-1000V	0~1200mA	-200~-1050V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH1200-12H	0~1200V	0~1000mA	0~1260V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH1200-12HN	-240~-1200V	0~1000mA	-240~ -1260V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH1200-15H	0~1500V	0~800mA	0~1575V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH1200-15HN	-300~-1500V	0~800mA	-300~ -1575V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH1200-20H	0~2000V	0~600mA	0~2100V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH1200-20HN	-400~-2000V	0~600mA	-400~ -2100V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH1200-30H	200~3000V	0~400mA	200~3150V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH1200-30HN	-600~-3000V	0~400mA	-600~ -3150V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH1200-40H	200~4000V	0~300mA	200~4200V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH1200-40HN	-800~ -4000V	0~300mA	-800~ -4200V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH1200-50H	300~5000V	0~240mA	300~5250V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH1200-50HN	-1000~ -5000V	0~240mA	-1000~ -5250V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH1200-60H	400~6000V	0~200mA	400~6120V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH1200-60HN	-1200~ -6000V	0~200mA	-1200~ -6120V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH1200-80H	500~8000V	0~150mA	500~8400V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH1200-80HN	-1600~ -8000V	0~150mA	-1600~-8400V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH1200-100H	800~10000V	0~120mA	800~10500V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH1200-100HN	-2000~ -10000V	0~120mA	-2000~ -10500V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH1200-120H	1000~12000V	0~100mA	1000~12600V	≤0.1% FS	1V	0.01mA	1V	1V	0.1mA
UPH1200-120HN	-2400~ -12000V	0~100mA	-2400~ -12600V	≤0.1% FS	1V	0.01mA	1V	1V	0.1mA
Dimensions	425W×88H×463D mm (2U)								
Weight	Approx 13kg								
AC Input	1φ3W, 220V±10% 47~63Hz								

Specifications

Model (2400W)	Rated Output			Voltage Ripple	Programming Resolution			Display Resolution	
	V	A	OVP		V	A	OVP	V	A
UPH2400-10H	0~1000V	0~2400mA	0~1050V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH2400-10HN	-200~-1000V	0~2400mA	-200~-1050V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH2400-12H	0~1200V	0~2000mA	0~1260V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH2400-12HN	-240~-1200V	0~200mA	-240~-1260V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH2400-15H	0~1500V	0~1600mA	0~1575V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH2400-15HN	-300~-1500V	0~1600mA	-300~-1575V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH2400-20H	0~2000V	0~1200mA	0~2100V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH2400-20HN	-400~-2000V	0~1200mA	-400~-2100V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH2400-30H	200~3000V	0~800mA	200~3150V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH2400-30HN	-600~-3000V	0~800mA	-600~-3150V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH2400-40H	200~4000V	0~600mA	200~4200V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH2400-40HN	-800~-4000V	0~600mA	-800~-4200V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH2400-50H	300~5000V	0~480mA	300~5250V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH2400-50HN	-1000~-5000V	0~480mA	-1000~-5250V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH2400-60H	400~6000V	0~400mA	400~6120V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH2400-60HN	-1200~-6000V	0~400mA	-1200~-6120V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH2400-80H	500~8000V	0~300mA	500~8400V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH2400-80HN	-1600~-8000V	0~300mA	-1600~-8400V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH2400-100H	800~10000V	0~240mA	800~10500V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH2400-100HN	-2000~-10000V	0~240mA	-2000~-10500V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
Dimensions	425W×88H×463D mm (2U) for 1kV to 5kV models 482.6W×88H×533D mm (2U-L) for 6kV to 10kV models								
Weight	Approx 13kg								
AC Input	1φ3W, 220V±10% 47~63Hz for 1kV to 5kV models 3φ4W, 380V±10% 47~63Hz for 6kV & 10kV models								

Specifications

Model (3000W)	Rated Output			Voltage Ripple	Programming Resolution			Display Resolution	
	V	A	OVP		V	A	OVP	V	A
UPH3000-10H	0~1000V	0~3000mA	0~1050V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH3000-10HN	-200~-1000V	0~3000mA	-200~-1050V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH3000-12H	0~1200V	0~2500mA	0~1260V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH3000-12HN	-240~-1200V	0~2500mA	-240~-1260V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH3000-15H	0~1500V	0~2000mA	0~1575V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH3000-15HN	-300~-1500V	0~2000mA	-300~-1575V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH3000-20H	0~2000V	0~1500mA	0~2100V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH3000-20HN	-400~-2000V	0~1500mA	-400~-2100V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH3000-30H	200~3000V	0~1000mA	200~3150V	≤0.1% FS	1V	0.1mA	1V	1V	1mA
UPH3000-30HN	-600~-3000V	0~1000mA	-600~-3150V	≤0.1% FS	1V	0.1mA	1V	1V	1mA
UPH3000-40H	200~4000V	0~750mA	200~4200V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH3000-40HN	-800~-4000V	0~750mA	-800~-4200V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH3000-50H	300~5000V	0~600mA	300~5250V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH3000-50HN	-1000~-5000V	0~600mA	-1000~-5250V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH3000-60H	400~6000V	0~500mA	400~6120V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH3000-60HN	-1200~-6000V	0~500mA	-1200~-6120V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH3000-80H	500~8000V	0~375mA	500~8400V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH3000-80HN	-1600~-8000V	0~375mA	-1600~-8400V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH3000-100H	800~10000V	0~300mA	800~10500V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH3000-100HN	-2000~-10000V	0~300mA	-2000~-10500V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
Dimensions	425W×88H×463D mm (2U) for 1kV to 5kV models 482.6W×88H×533D mm (2U-L) for 6kV to 10kV models								
Weight	Approx 13kg								
AC Input	1φ3W, 220V±10% 47~63Hz for 1kV to 5kV models 3φ4W, 380V±10% 47~63Hz for 6kV & 10kV models								

Specifications

Model (4000W)	Rated Output			Voltage Ripple	Programming Resolution			Display Resolution	
	V	A	OVP		V	A	OVP	V	A
UPH4000-8H	0~800V	0~5000mA	0~ 840V	≤0.1% FS	0.1V	1mA	0.1V	0.1V	1mA
UPH4000-10H	0~1000V	0~4000mA	0~1050V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH4000-10HN	-200~ -1000V	0~4000mA	-200~ -1050V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH4000-12H	0~1200V	0~3300mA	0~1260V	≤0.1%FS	1V	1mA	1V	1V	1mA
UPH4000-12HN	-240~ -1200V	0~3300mA	-240~ -1260V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH4000-15H	0~1500V	0~2600mA	0~1575V	≤0.1%FS	1V	1mA	1V	1V	1mA
UPH4000-15HN	-300~-1500V	0~2600mA	-300~ -1575V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH4000-20H	0~2000V	0~2000mA	0~2100V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH4000-20HN	-400~ -2000V	0~2000mA	-400~ -2100V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH4000-30H	400~3000V	0~1300mA	400~3150V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH4000-30HN	-600~ -3000V	0~1300mA	-600~ -3150V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH4000-40H	550~4000V	0~1000mA	550~4200V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH4000-40HN	-800~ -4000V	0~1000mA	-800~ -4200V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH4000-50H	700~5000V	0~800mA	700~5250V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH4000-50HN	-1000~ -5000V	0~800mA	-1000~ -5250V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH4000-60H	800~6000V	0~660mA	800~6120V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH4000-60HN	-1200~ -6000V	0~660mA	-1200~ -6120V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
Dimensions	482.6W×88H×533D mm (2U-L)								
Weight	Approx 14kg								
AC Input	3φ4W, 380V±10% 47~63Hz								

Specifications

Model (5000W)	Rated Output			Voltage Ripple	Programming Resolution			Display Resolution	
	V	A	OVP		V	A	OVP	V	A
UPH5000-10H	0~1000V	0~5000mA	0~1050V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH5000-10HN	-200~ -1000V	0~5000mA	-200~ -1050V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH5000-12H	0~1200V	0~4160mA	0~1260V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH5000-12HN	-240~ -1200V	0~4160mA	-240~ -1260V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH5000-15H	0~1500V	0~3300mA	0~1575V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH5000-15HN	-300~ -1500V	0~3300mA	-300~ -1575V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH5000-20H	0~2000V	0~2500mA	0~2100V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH5000-20HN	-400~ -2000V	0~2500mA	-400~ -2100V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH5000-30H	400~3000V	0~1600mA	400~3150V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH5000-30HN	-600~ -3000V	0~1600mA	-600~ -3150V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH5000-40H	550~4000V	0~1250mA	550~4200V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH5000-40HN	-800~ -4000V	0~1250mA	-800~ -4200V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH5000-50H	700~5000V	0~1000mA	700~5250V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH5000-50HN	-1000~ -5000V	0~1000mA	-1000~ -5250V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH5000-60H	800~6000V	0~830mA	800~6120V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
UPH5000-60HN	-1200~ -6000V	0~830mA	-1200~ -6120V	≤0.1% FS	1V	0.1mA	1V	1V	0.1mA
Dimensions	482.6W×88H×533D mm (2U-L)								
Weight	Approx 14kg								
AC Input	3φ4W, 380V±10% 47~63Hz								

Specifications

Model (6000W)	Rated Output			Voltage Ripple	Programming Resolution			Display Resolution	
	V	A	OVP		V	A	OVP	V	A
UPH6000-10H	0~1000V	0~6000mA	0~1050V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH6000-10HN	-200~ -1000V	0~6000mA	-200~ -1050V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH6000-12H	0~1200V	0~5000mA	0~1260V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH6000-12HN	-240~ -1200V	0~5000mA	-240~ -1260V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH6000-15H	0~1500V	0~4000mA	0~1575V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH6000-15HN	-300~ -1500V	0~4000mA	-300~ -1575V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH6000-20H	0~2000V	0~3000mA	0~2100V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH6000-20HN	-400~ -2000V	0~3000mA	-400~ -2100V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH6000-30H	400~3000V	0~2000mA	400~3150V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH6000-30HN	-600~ -3000V	0~2000mA	-600~ -3150V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH6000-40H	550~4000V	0~1500mA	550~4200V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH6000-40HN	-800~ -4000V	0~1500mA	-800~ -4200V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH6000-50H	700~5000V	0~1200mA	700~5250V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH6000-50HN	-1000~ -5000V	0~1200mA	-1000~ -5250V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH6000-60H	800~6000V	0~1000mA	800~6120V	≤0.1% FS	1V	0.1mA	1V	1V	1mA
UPH6000-60HN	-1200~ -6000V	0~1000mA	-1200~ -6120V	≤0.1% FS	1V	0.1mA	1V	1V	1mA
Dimensions	482.6W×132.5H×533D mm (3U)								
Weight	Approx 18kg								
AC Input	3φ4W, 380V±10% 47~63Hz								

Specifications

Model (8000W)	Rated Output			Voltage Ripple	Programming Resolution			Display Resolution	
	V	A	OVP		V	A	OVP	V	A
UPH8000-10H	0~1000V	0~8000mA	0~1050V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH8000-10HN	-200~ -1000V	0~8000mA	-200~ -1050V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH8000-12H	0~1200V	0~6670mA	0~1260V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH8000-12HN	-240~ -1200V	0~6670mA	-240~ -1260V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH8000-15H	0~1500V	0~5330mA	0~1575V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH8000-15HN	-300~-1500V	0~5330mA	-300~ -1575V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH8000-20H	0~2000V	0~4000mA	0~2100V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH8000-20HN	-400~ -2000V	0~4000mA	-400~ -2100V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH8000-30H	400~3000V	0~2660mA	400~3150V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH8000-30HN	-600~ -3000V	0~2660mA	-600~ -3150V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH8000-40H	550~4000V	0~2000mA	550~4200V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH8000-40HN	-800~ -4000V	0~2000mA	-800~ -4200V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH8000-50H	700~5000V	0~1600mA	700~5250V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH8000-50HN	-1000~ -5000V	0~1600mA	-1000~ -5250V	≤0.1% FS	1V	1mA	1V	1V	1mA
UPH8000-60H	800~6000V	0~1330mA	800~6120V	≤0.1% FS	1V	0.1mA	1V	1V	1mA
UPH8000-60HN	-1200~ -6000V	0~1330mA	-1200~ -6120V	≤0.1% FS	1V	0.1mA	1V	1V	1mA
Dimensions	482.6W×132.5H×533D mm (3U)								
Weight	Approx 22kg								
AC Input	3φ4W, 380V±10% 47~63Hz								

For the purpose of product improvement, specifications are subject to change without prior notice.



Distributor/Representative

■ All products contained in this catalogue are equipment and devices that are premised on use under the supervision of qualified personnel, and are not designed or produced for home-use or use by general consumers. ■ Specifications, design and so forth are subject to change without prior notice to improve the quality. ■ Product names and prices are subject to change and production may be discontinued when necessary. ■ Product names, company names and brand names contained in this catalogue represent the respective registered trade name or trade mark. ■ Colors, textures and so forth of photographs shown in this catalogue may differ from actual products due to a limited fidelity in printing. ■ Although every effort has been made to provide the information as accurate as possible for this catalogue, certain details have unavoidably been omitted due to limitations in space. ■ If you find any misprints or errors in this catalogue, it would be appreciated if you would inform us. ■ Please contact our distributors to confirm specifications, price, accessories or anything that may be unclear when placing an order or concluding a purchasing agreement.